CATEGORY	DESCRIPTION	P/N #
CONNECTOR	Modular Jack, 8P8C, R/A, With LED	MJ88-XX11-RVSL2-X

料号由原 MJ88-BX11-RVSL2-X
变更为 MJ88-XX11-RVSL2-X

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A03		塑胶主体增加颜色选项	XSY	2017.12.18
A04	————	增加卷带包装方式	XSY	2018.04.20
A05	————	增加颜色选项	LXY	2021.03.26

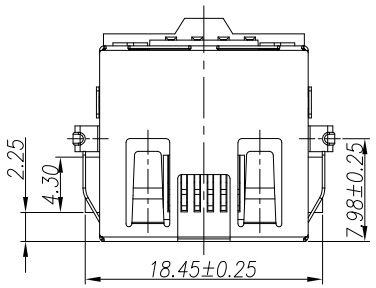



Section:A-A

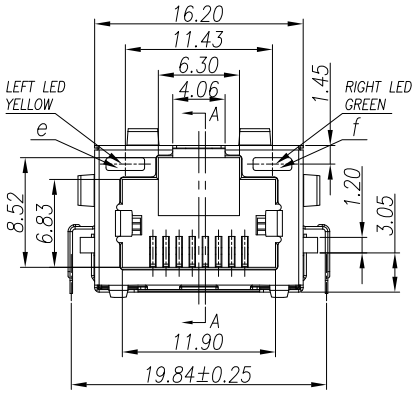

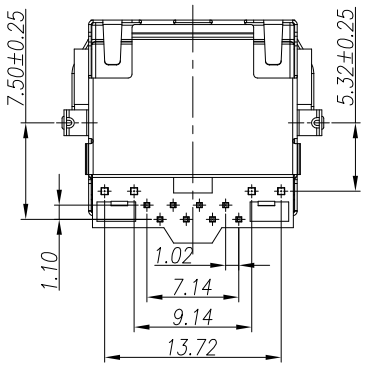

LED COLOR			
	NOOE	COLOR	
LED-R	10(+) 9(-)	GREEN	10 — 9
LED-L	12(+) 11(-)	YELLOW	12 — 11

SPECIFICATION
1.CURRENT RATING: 1.5AMPS
2.VOLTAGE RATING: 125V AC
3.INSULATION RESISTANCE: 500MΩ MIN.
4.WITHSTAND VOLTAGE:
AC1000V RMS 50Hz or 60Hz MIN.
5.CONTACT RESISTANCE:40mΩ MAX.
6.DURABILITY: 750 MATING CYCLES
7.OPERATING TEMPERATURE: -40°C~+80°C





3D VIEW

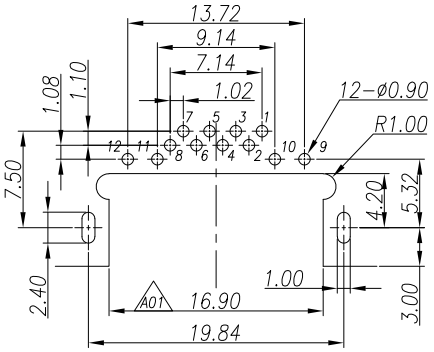

RECOMMENDED PCB LAYOUT (TOP VIEW)
(ALL TOLERANCES ARE ±0.05)

MJ88-XX11-RVSL2-X

TABLE

A03	X	Terminal Plating
	B	LCP BLACK
	U	PA9T BLUE(RAL 5002)
	1	PA9T BLACK
A05	Y	PA9T YELLOW

	X	包装方式
	C	卷带包装自粘式
A04	C1	卷带包装热封式
A02	P	吸塑盒包装

X	Terminal Plating
0	Au 1u" Plating
1	Au 3u" Plating
2	Au 6u" Plating
3	Au 15u" Plating
4	Au 30u" Plating
5	Au 50u" Plating

NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR	Remark
f	LED-R	1	GREEN		
e	LED-L	1	YELLOW		
d	Terminal	8	PHOSPHOR BRONZE T=0.35mm	Au Plating	
c	Cover	1	THERMOPLASTIC UL94V-0	SEE TABLE	
b	Shell	1	BRASS T=0.20mm	NI	
a	Housing	1	THERMOPLASTIC UL94V-0	SEE TABLE	

UNLESS OTHERWISE SPECIFED TOLERANCES

DECIMALS: X :±0.5 X.X :±0.3 X.XX :±0.2
ANGLES: X :±2° X.X :±1°

東莞市合陵電子有限公司
DongGuan HeLing Electronic Co.,LTD

SCALE:1/1	UNIT: mm		DWG.NO:
SIZE: A4	PAGE: 1OF1	REV:A05	WI-061-110

APPROVED BY	CHECKED BY	PREPARED BY
DICK	XSY	LXY

CUSTOMER COPY