CATEGORY	DESCRIPTION	P/N #
CONNECTOR	MJ45 8P8C SMT H=5.5mm 反口	MJ88G-XX11-HXRV5-X

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A05	————	新增电镀雾锡规格	LXY	2020.07.18
A06	————	新增包装选项	ZSH	2021.6.10

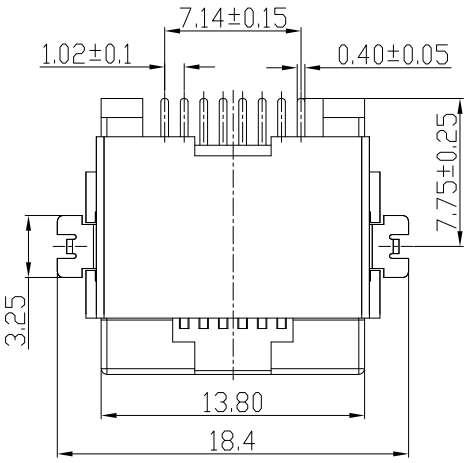

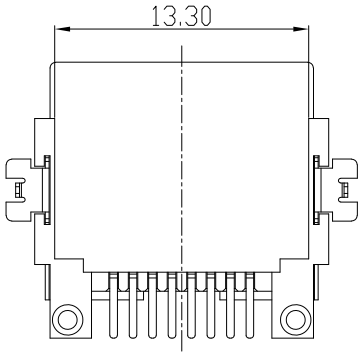

(JACK BOTTOM VIEW)

MJ88G-XX11-HXRV5-X

TABLE 1

X	COLOR
B	BLACK
W	WITER

TABLE 2

X	MATERIAL
L	LCPS475
9	PA9T

X	包装方式
C	卷带包装
P	吸塑包装

Plating

X	Terminal Plating
0	Au 1u" Plating/Bright-Tin
1	Au 3u" Plating/Bright-Tin
2	Au 6u" Plating/Bright-Tin
3	Au 15u" Plating/Bright-Tin
4	Au 30u" Plating/Bright-Tin
5	Au 50u" Plating/Bright-Tin
6	Au 1u" Plating/Matte-Tin
7	Au 3u" Plating/Matte-Tin

SPECIFICATIONS:

1. Voltage: 150V AC RMS
2. Current Rating: 1.5A
3. Contact Resistance: 40mΩ MAX.
4. Insulation Resistance: 500MΩ MIN.
5. Dielectric Withstang Voltage :500V AC
6. Operature Temperature: -40°C~80°C
7. Durability: 750 Mating Cycles MIN.

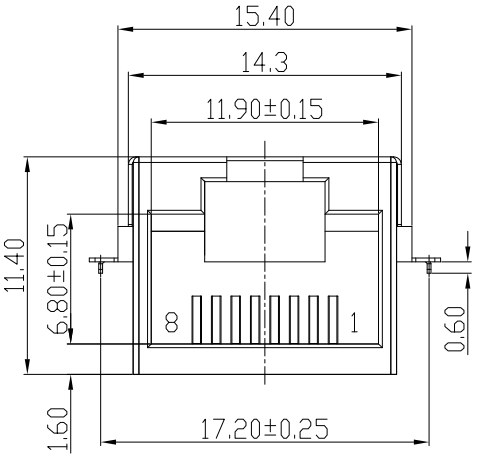

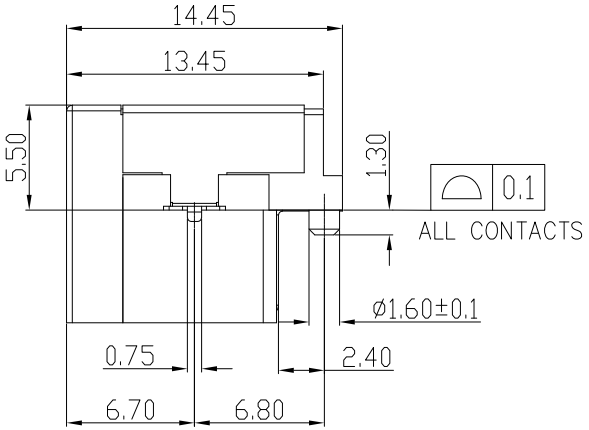

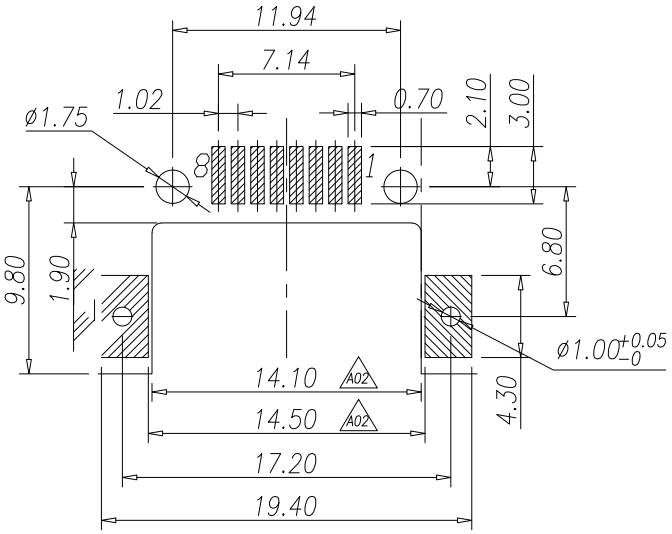

Recommend PCB Layout
Jack Top View
Tolerance: ±0.05mm

NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR	Remark
C	SHELL	1	BRASS T=0.2mm	Ni PALTING	
b	TERMINAL	8	PHOSPHOR BRONZE T=0.3mm	Au/Tin PALTING	
a	HOUSING	1	SEE TABLE 2	SEE TABLE 1	

東莞市合陵電子有限公司
DongGuan HeLing Electronic Co.,LTD

UNLESS OTHERWISE SPECIFED TOLERANCES	SCALE:1/1	UNIT: mm	DWG.NO:
	SIZE: A3	PAGE:1 OF 1	REV:A06
			WI-061-146

DECIMALS: X :±0.5 X.X :±0.3 X.XX :±0.2
ANGLES: X :±2° X.X :±1°

APPROVED BY	CHECKED BY	PREPARED BY
DICK	XSY	ZSH

CUSTOMER COPY