

Specifications


备注 (Remark)

1. 材料 (MATERIAL)




胶芯: PA9T+30%G, F UL94V-0, 颜色: 黑色.
 Housing: PA9T+30%G, F UL94V-0, Color: Black
 端子: 磷/青铜, 镀底30u"MIN, 表面镀金0.8u"
 Contact: Phosphor bronze, 0.8u" GOLD PLATING OVER ALL
 30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 3 AMP
 Rating Current: 3 AMP
 接触电阻: 20 mΩ MAX.
 Contact Resistance: 20 mΩ MAX.
 绝缘电阻: 1000 MΩ MIN.
 Insulating Resistance: 1000 MΩ MIN.
 耐电压: AC 500V.
 Withstanding Voltage: AC 500V.
 温度范围: -40° C to +105° C
 Temperature Range: -40° C to +105° C

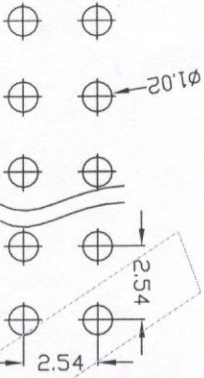

客编: K1002
 注意: 1. 带*为品质检验尺寸
 2. 内径1.7MM
 3. 针粗0.74*0.4

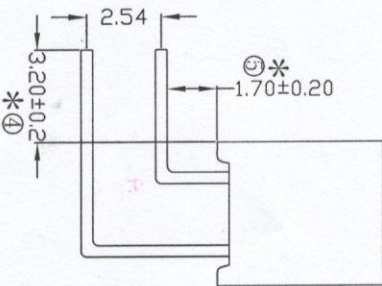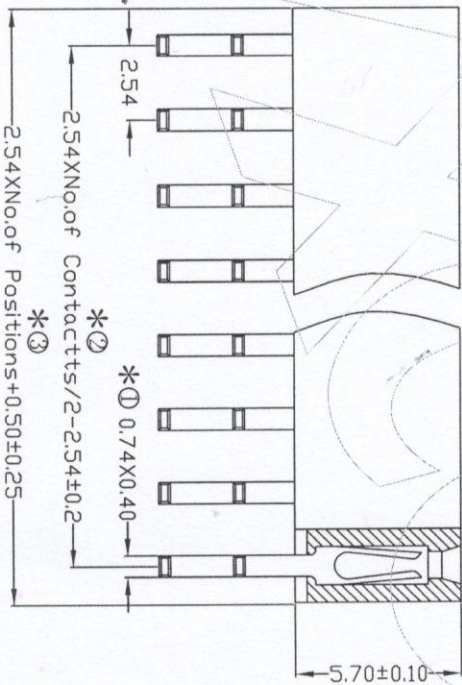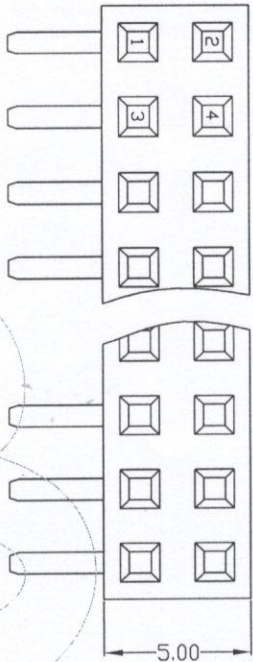

Ordering Information

F157-12 XX XX X RY E 3

注: 同系列成品共用此图

NO. OF PINS PER ROW	NO. OF PINS PER ROW	INSULATOR MATERIAL	PACKING
2-40P	Full of Gold	A: PE Bag	A: PE Bag
	Semi-gold	B: Tape & Reel	B: Tape & Reel
	INSULATOR MATERIAL:	C: Tube	C: Tube
	A0=0.8u"	D: Tube+Cap	D: Tube+Cap
	A1=1u"	E: Tray	E: Tray
	A2=1.5u"	F: Tape	F: Tape
	A3=2u"		
	A4=3u"		
	A5=5u"		
	A6=10u"		
	A7=15u"		
	A8=20u"		
	A9=30u"		
	S1=Ordinary Tin Plated		
	S2= Matte Tin Plated		
	S3= Tin-plated High-temperature		

YXcon 东莞市宇熙精密连接器有限公司
 Dongguan Yuxi Electronic Co., Ltd.

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	SCALE	Fit	DESIGN	CHECK	PROJ.	APPROVE	PART NO.	TITLE	CUSTOMER NO.
A0	2020.03.03	新版发行	周芳杰	方总	X.X ±0.25 X.XX ±0.20 X.XXX ±0.10 Angle ±3°	A4	MM					F157-12XXXXXXRYE3	F157-12*1XP 90度 内径1.7MM	DTC:3.2 Y型 K1002