

SOT-23 Plastic-Encapsulate MOSFETS

Features

- $V_{DS}=30V$
- $I_D=0.1A$
- $R_{DS(on)}@V_{GS}=4V < 8\Omega$
- $R_{DS(on)}@V_{GS}=2.5V < 13\Omega$
- Trench Power LV MOSFET technology
- High density cell design for low $R_{DS(ON)}$
- High Speed switching

Applications

- Interfacing
- Load switch

Mechanical Data

- Case: SOT-23
Molding compound meets UL 94V-0 flammability rating, RoHS-compliant, halogen-free
- Terminals: Solder plated, solderable per MIL-STD-750, Method 2026

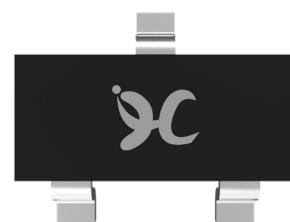
Drain-source Voltage

30 V


Drain Current

0.1 Ampere

SOT-23



Function Diagram

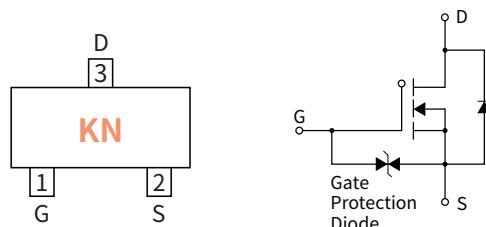

Maximum Ratings (Ta=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	VALUE
Drain-source Voltage	V_{DS}	V	30
Gate-source Voltage	V_{GS}	V	± 20
Drain Current	I_d	A	0.1
Pulsed Drain Current	I_{DM}	A	0.4
Total Power Dissipation	P_d	mW	200
Storage temperature	T_{stg}	°C	-55 ~ +150
Junction temperature	T_j	°C	-55 ~ +150
Typical Thermal Resistance	$R_{\theta J-A}$	°C /W	357

Ordering Information

PACKAGE	PACKAGE CODE	UNIT WEIGHT(g)	REEL(pcs)	BOX(pcs)	CARTON(pcs)	DELIVERY MODE
SOT-23	R1	0.008	3000	45000	180000	7"

● Static Parameter Characteristics (Ta=25°C Unless otherwise specified)






PARAMETER	SYMBOL	Condition	UNIT	Min	Typ	Max
Drain-Source Breakdown Voltage	BV _{DSS}	V _{GS} =0V, I _D =250μA	V	30	—	—
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} =30V, V _{GS} =0V	μA	—	—	1.0
Gate-Body Leakage Current	I _{GSS}	V _{GS} =±20V, V _{DS} =0V	μA	—	—	±1.0
Gate Threshold Voltage	V _{GS(th)}	V _{DS} =3.0V, I _D =0.1mA	V	0.8	—	1.5
Static Drain-Source On-Resistance	R _{DS(ON)}	V _{GS} =4.0V, I _D =10mA	Ω	—	—	8.0
		V _{GS} =2.5V, I _D =1.0mA		—	—	13
Forward Transconductance	g _{FS}	V _{DS} =3.0V, I _D =10mA	mS	20	—	—

● Dynamic Parameters (Ta=25°C Unless otherwise specified)

PARAMETER	SYMBOL	Condition	UNIT	Min	Typ	Max
Input Capacitance	C _{iss}	V _{DS} =5.0V, V _{GS} =0V, f=1MHZ	pF	—	13	—
Output Capacitance	C _{oss}			—	9.0	—
Reverse Transfer Capacitance	C _{rss}			—	4.0	—

● Switching Parameters (Ta=25°C Unless otherwise specified)


PARAMETER	SYMBOL	Condition	UNIT	Min	Typ	Max
Turn-on Delay Time	t _{D(on)}	V _{GS} =5.0V, V _{DS} =5.0V, I _D =10mA , R _{GEN} =10Ω, R _L =500Ω	ns	—	15	—
Turn-on Rise Time	t _r			—	35	—
Turn-off Delay Time	t _{D(off)}			—	80	—
Turn-off fall Time	t _f			—	80	—

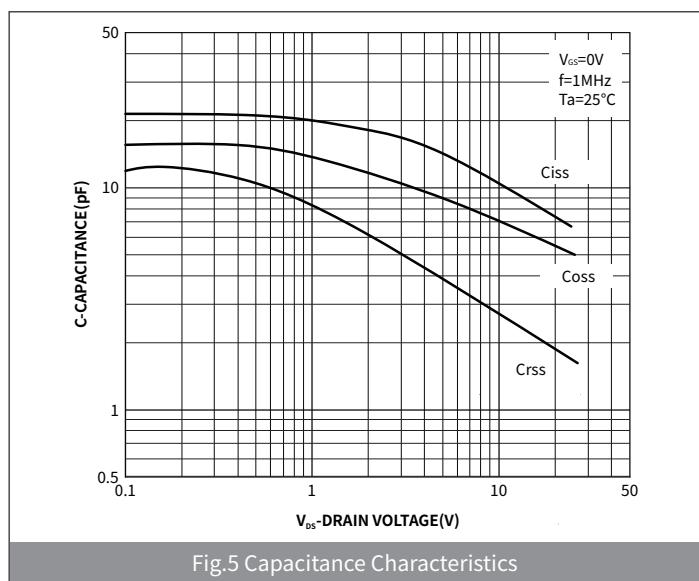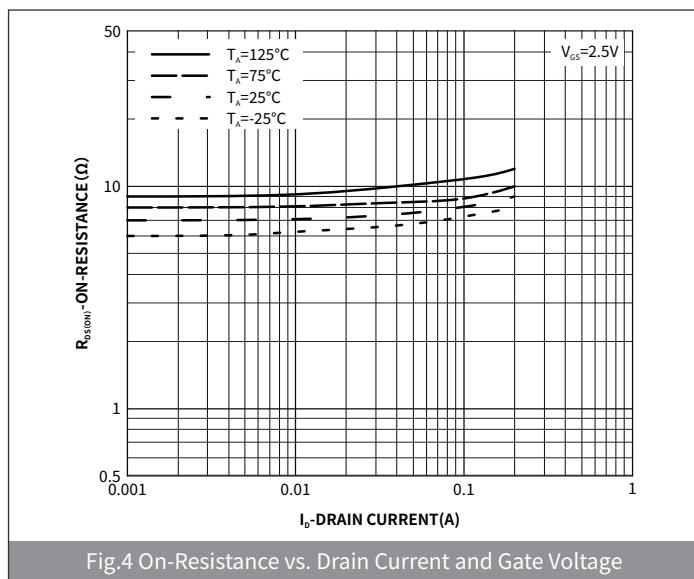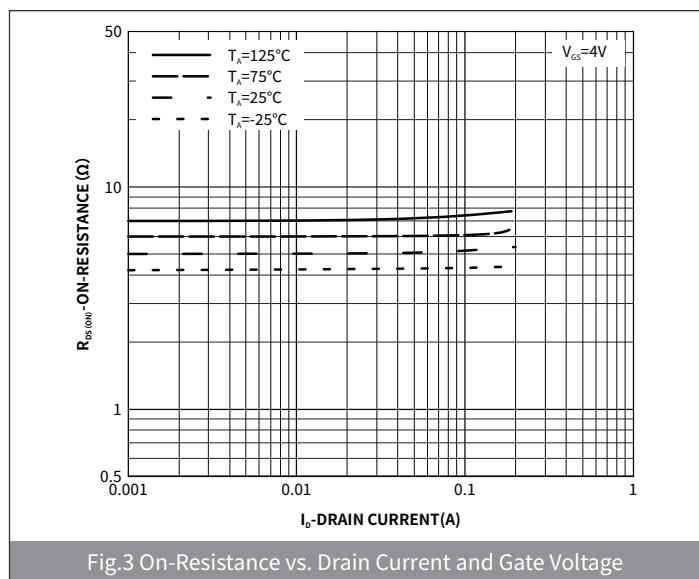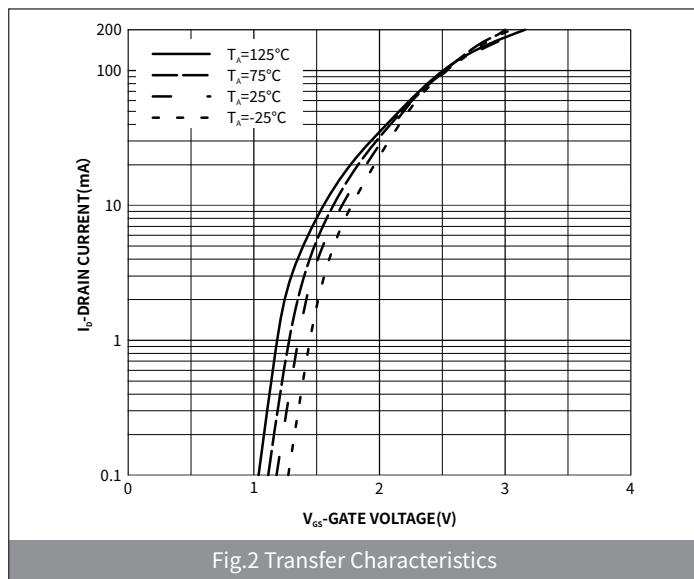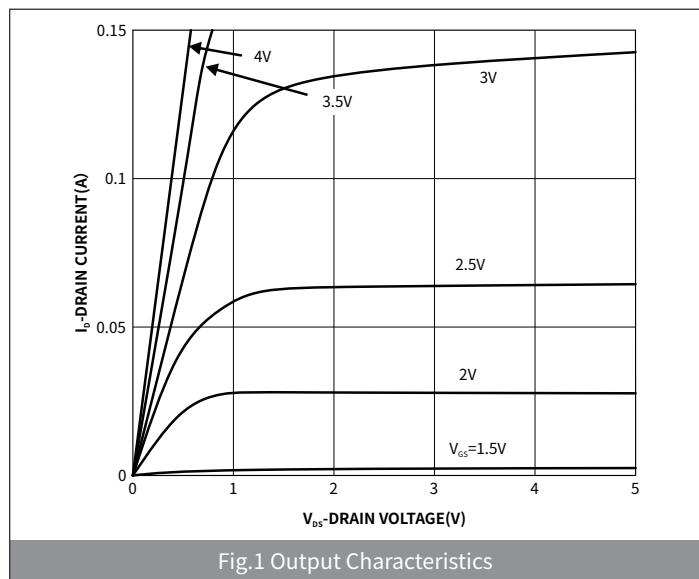● Ratings And Characteristics Curves (Ta=25°C Unless otherwise specified)


● Ordering Information


PACKAGE	PACKAGE CODE	UNIT WEIGHT(g)	REEL(pcs)	BOX(pcs)	CARTON(pcs)	DELIVERY MODE
SOT-23	R1	0.008	3000	45000	180000	7"

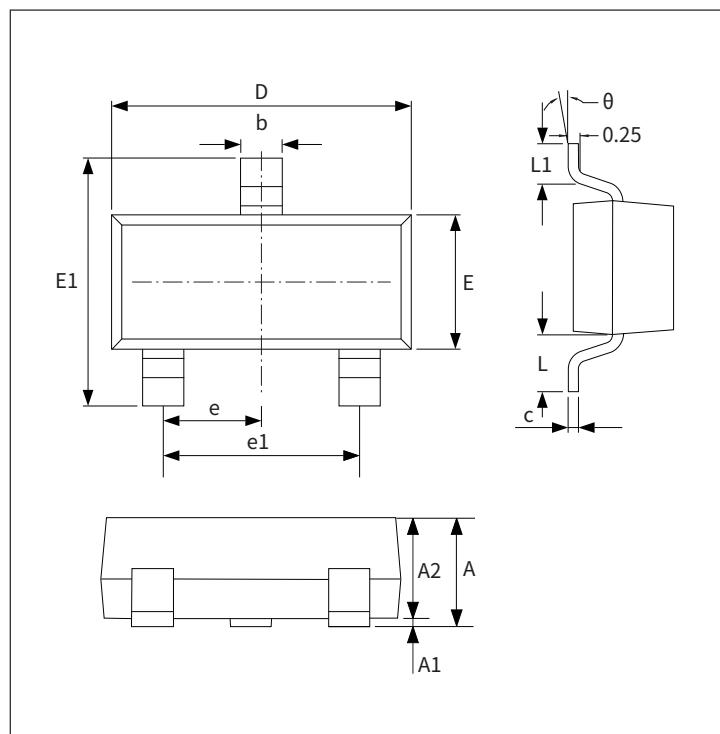● Package Outline Dimensions (SOT-23)



Symbol	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	0.90	1.15	0.035	0.045
A1	-	0.10	-	0.004
A2	0.90	1.05	0.035	0.041
b	0.30	0.50	0.012	0.020
c	0.10	0.20	0.004	0.008
D	2.80	3.00	0.110	0.118
E	1.20	1.40	0.047	0.055
E1	2.25	2.55	0.089	0.100
e	0.950TYP		0.037TYP	
e1	1.80	2.00	0.071	0.079
L	0.550REF		0.022REF	
L1	0.30	0.50	0.012	0.020
θ	-	8°	-	8°

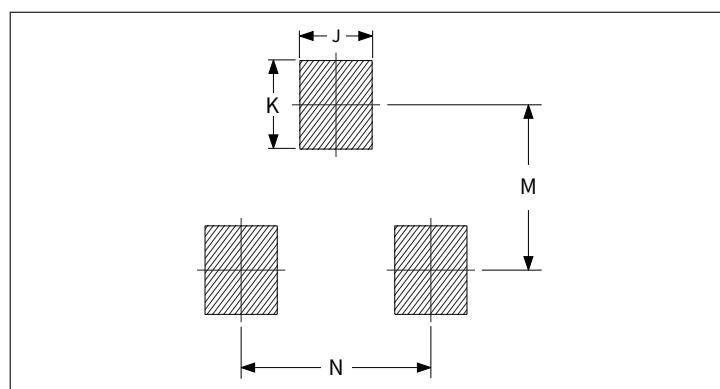● Suggested Pad Layout



Symbol	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
J	0.75	0.85	0.030	0.033
K	0.85	0.95	0.33	0.037
M	1.95	2.05	0.077	0.081
N	1.85	1.95	0.073	0.077