


NPN Plastic-Encapsulate Transistors

Medium Power Linear Switching Applications
 †Complementary to TIP42C

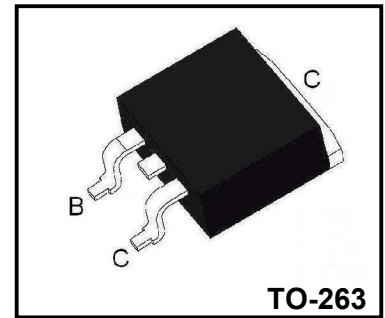

Absolute Maximum Ratings (Ta = 25 °C)

Parameter	Symbol	Value	Unit
Collector-base voltage	BV_{CBO}	100	V
Collector-emitter voltage	BV_{CEO}	100	V
Emitter-base voltage	BV_{EBO}	5	V
Collector current(DC)	I_C	6	A
Collector power dissipation	P_C	Ta =25 °C	2
		Tc =25 °C	65
Junction temperature	T_j	150	°C
Storage temperature	T_{stg}	-65~150	°C

Electrical Characteristics (Ta = 25 °C)

Parameter	Symbol	Conditions	Min	Typ	Unit
Collector-base breakdown voltage	BV_{CBO}	$I_C = 0.5mA, I_E = 0$	100		V
Collector-emitter breakdown voltage	BV_{CEO}	$I_C = 10mA, I_B = 0$	100		V
Emitter-base breakdown voltage	BV_{EBO}	$I_E = 0.5mA, I_C = 0$	5		V
Collector cut-off current	I_{CBO}	$V_{CE} = 100V, I_E = 0$			mA
Collector cut-off current	I_{CEO}	$V_{CB} = 60V, I_E = 0$			mA
Emitter cut-off current	I_{EBO}	$V_{EB} = 5V, I_C = 0$			mA
DC current gain*	h_{FE}	$V_{CE} = 4V, I_C = 0.3A$	20		
		$V_{CE} = 4V, I_C = 3A$	15		
Collector-emitter saturation voltage*	$V_{CE(sat)}$	$I_C = 6A, I_B = 0.6A$			V
Base-emitter on voltage*	$V_{BE(on)}$	$V_{CE} = 4V, I_C = 6A$			V
Current gain bandwidth product	f_T	$V_{CE} = 10V, I_C = 500mA$	3.0		MHz

* Pulse Test : PW ≤ 300μs, Duty cycle ≤ 2%

Typical Characteristics

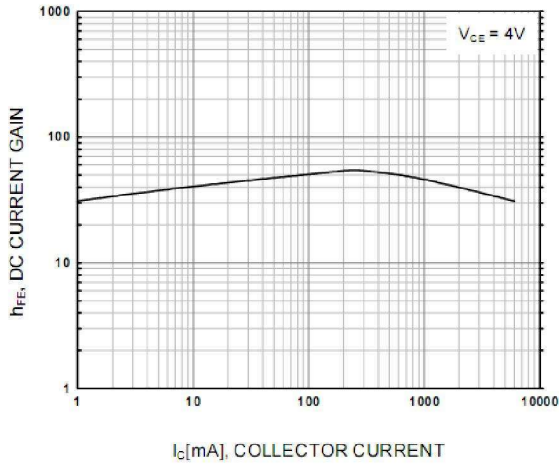


Figure 1. DC current Gain

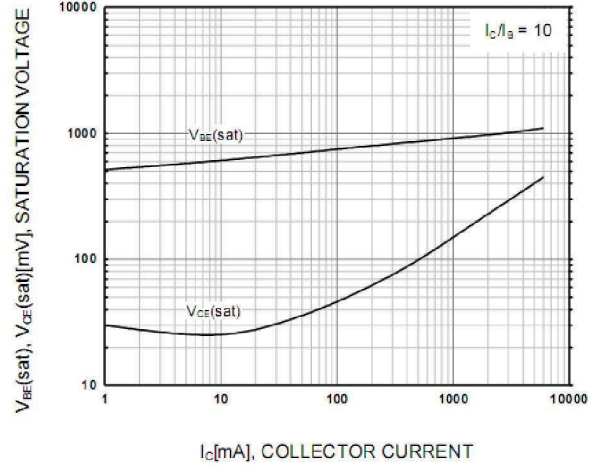


Figure 2. Base-Emitter Saturation Voltage and Collector-Emitter Saturation Voltage

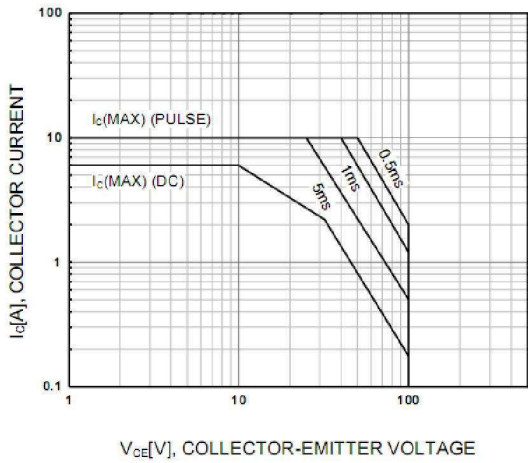


Figure 3. Safe Operating Area

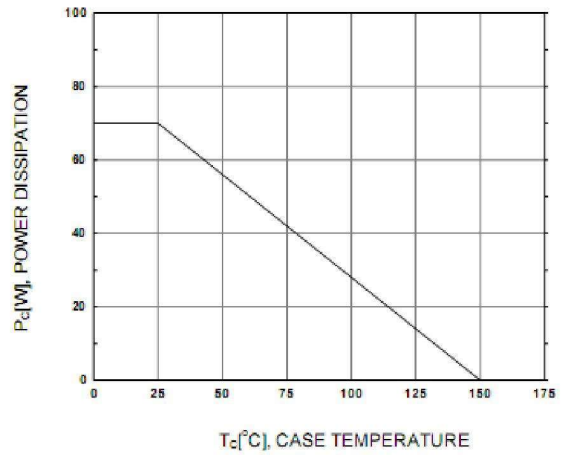


Figure 4. Power Derating

Package Dimensions

TO-263

Dim	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	4.30	4.70	0.169	0.185
A1	0.00	0.15	0.000	0.006
A2	4.30	4.55	0.169	0.179
B	1.10	1.50	0.043	0.059
b	0.70	0.90	0.028	0.035
b1	1.20	1.50	0.047	0.059
c	0.30	0.60	0.012	0.024
c1	1.17	1.37	0.046	0.054
D	9.90	10.20	0.390	0.402
E	8.50	8.90	0.335	0.350
e	2.44	2.64	0.096	0.104
e1	4.88	5.28	0.192	0.208
L	15.00	15.30	0.591	0.602
L1	5.20	5.40	0.205	0.213
L2	2.40	2.60	0.094	0.102
L3	1.60	1.80	0.063	0.071

Product Specification Classification

Part Number	Package	Marking	Pack
TIP41C	TO-263	YFU TIP41C XXXXX	800PCS/Tape