


SM8T

Automotive grade 8000 W Transient voltage suppressor



Product features

- Automotive grade (AEC-Q101 qualified)
- Low profile DO-218AB package
- Excellent clamping capability
- High surge capability
- 8000 W peak pulse power capability at 10/1000 μ s waveform
- Typical I_R less than 5 μ A
- Plastic package meets UL 94 V-0 flammability rating
- Meets moisture sensitivity level (MSL) level 1
- Terminal: tin plated, solderable per J-STD-002

Applications

- Automotive chassis and safety systems
- Advanced driver assistance systems (ADAS)
- Communication and infotainment systems
- Network systems and body electronics
- Power Train controls
- xEV and battery systems


Environmental compliance and general specifications

- ISO16750-2 P5A: 12 V system*
- ISO16750-2 P5A: 24 V system*
- AEC-Q101 qualified


*= Varies by test condition. Bi-polar not recommended



Ordering part number

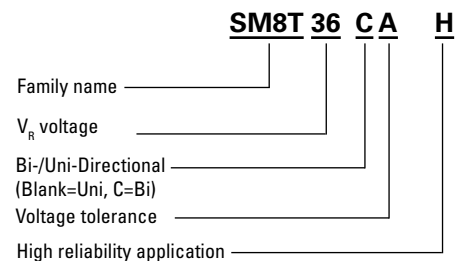

PIN configuration




Absolute maximum ratings

(+25 °C, RH=45%-75%, unless otherwise noted)

Parameter	Symbol	Value	Unit
Storage operating junction temperature range	T_{STG}/T_J	-55 to +175	°C
Steady state power dissipation at $T_C=+25\text{ °C}$	P_D	8.5	W
Peak pulse power dissipation on 10/1000 μs waveform	P_{PP}	8000	W
Peak pulse power dissipation on 10/10000 μs waveform	P_{PP}	6000	W
Peak forward surge current, 8.3 ms single half sine wave ¹	I_{FSM}	750	A
Typical thermal resistance junction to case	$R_{\theta JC}$	0.85	°C/W
Typical thermal resistance junction to ambient	$R_{\theta JA}$	11	°C/W


1. Measured on 8.3 ms single half sine wave or equivalent square wave for unidirectional device only, duty cycle = 4 per minute maximum

Mechanical parameters, pad layout- mm/inches

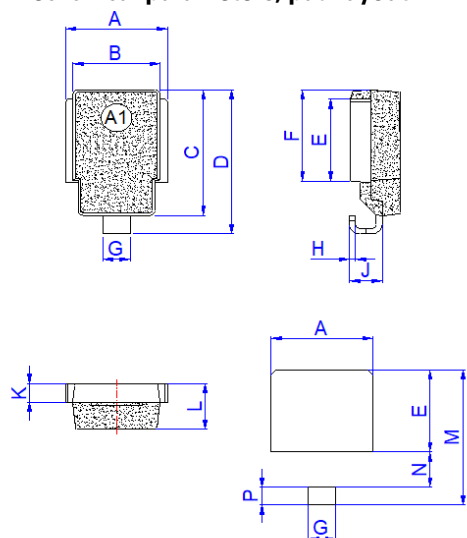

Dimension	Millimeters		Inches	
	Minimum	Maximum	Minimum	Maximum
A	9.5	10.5	0.374	0.413
B	8.3	8.7	0.327	0.342
C	13.3	13.7	0.524	0.539
D	15.0	16.0	0.592	0.628
E	8.5	9.1	0.335	0.358
F	9.5	10.1	0.374	0.398
G	2.4	3.0	0.094	0.118
H	0.5	0.7	0.020	0.028
J	2.7	3.7	0.106	0.146
K	1.9	2.1	0.075	0.083
L	4.7	5.1	0.185	0.201
M	14.2	14.8	0.559	0.583
N	3.5	4.1	0.138	0.161
P	1.6	2.2	0.063	0.087

Part marking




Part marking:
-xxxx = Date code
yyy- Refer to marking designator listed in Electrical characteristics table

Packaging information - mm/inches

Drawing not to scale.

Supplied in tape and reel packaging, 750 parts per 13" diameter reel (EIA-481 compliant)

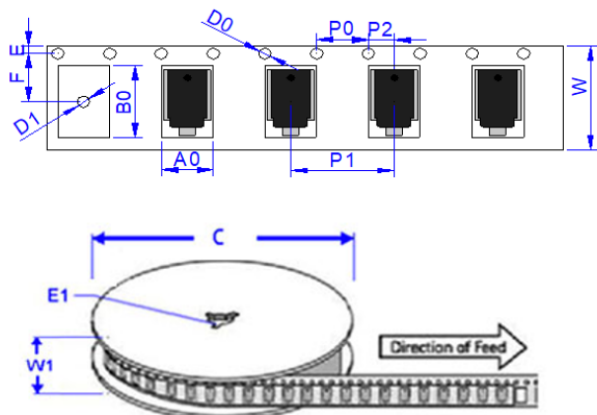

Dimensions	Millimeters	Inches
A0	10.80 ± 0.3	0.425 ± 0.012
B0	16.13 ± 0.3	0.635 ± 0.012
C	330.0	13.0 ± 0.012
D0	1.55 ± 0.2	0.061 ± 0.008
D1	1.55 ± 0.2	0.061 ± 0.008
E	1.75 ± 0.2	0.069 ± 0.008
E1	13.30 ± 0.2	0.524 ± 0.008
F	11.50 ± 0.2	0.453 ± 0.008
P0	4.00 ± 0.2	0.157 ± 0.008
P1	16.00 ± 0.2	0.630 ± 0.008
P2	2.00 ± 0.2	0.079 ± 0.008
W	24.00 ± 0.2	0.945 ± 0.008
W1	25.85 ± 0.2	1.018 ± 0.008

Electrical specifications (+25 °C)

Part number		Marking		V_R	$I_R @ V_R$	$I_R @ V_R$	$V_{BR} @ I_T$		I_T	$V_C @ I_{PP}$	I_{PP}
Uni-polar	Bi-polar	Uni	Bi	(V)	$\mu A @ +25^\circ C$	$\mu A @ +175^\circ C$	min (V)	max (V)	(mA)	max (V)	(A)
SM8T20AH	/	SM8T20A	/	20	5	150	22.2	24.5	5	32.4	247
SM8T22AH	/	SM8T22A	/	22	5	150	24.4	26.9	5	35.5	225
SM8T24AH	/	SM8T24A	/	24	5	150	26.7	29.5	5	38.9	205
SM8T26AH	/	SM8T26A	/	26	5	150	28.9	31.9	5	42.1	190
SM8T28AH	/	SM8T28A	/	28	5	150	31.1	34.4	5	45.4	176
SM8T30AH	/	SM8T30A	/	30	5	150	33.3	36.8	5	48.4	165
SM8T32AH	/	SM8T32A	/	32	5	150	35.5	39.4	5	51.4	156
SM8T33AH	SM8T33CAH	SM8T33A	SM8T33C	33	5	150	36.7	40.6	5	53.3	150
SM8T36AH	SM8T36CAH	SM8T36A	SM8T36C	36	5	150	40	44.2	5	58.1	138
SM8T40AH	/	SM8T40A	/	40	5	150	44.4	49.1	5	64.5	124
SM8T43AH	/	SM8T43A	/	43	5	150	47.8	52.8	5	69.4	115

Surge waveform: 10/1000 μs

V_R : Stand-off voltage -- Maximum voltage that can be applied

V_{BR} : Breakdown voltage

V_C : Clamping voltage -- Peak voltage measured across the suppressor at a specified I_{PP}


I_R : Reverse leakage current

I_T : Test current


Ratings and V-I characteristic curves (+25 °C unless otherwise noted)

Uni-polar curves


Power derating curves

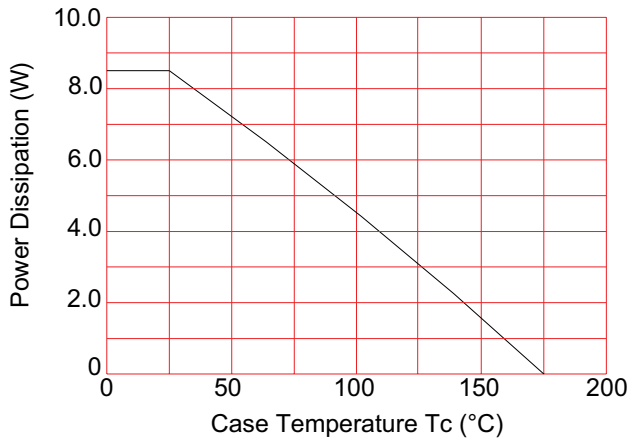


Pulse waveform

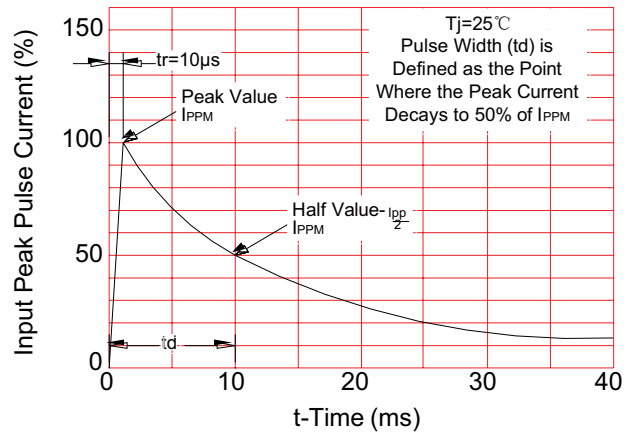


Load dump power characteristics

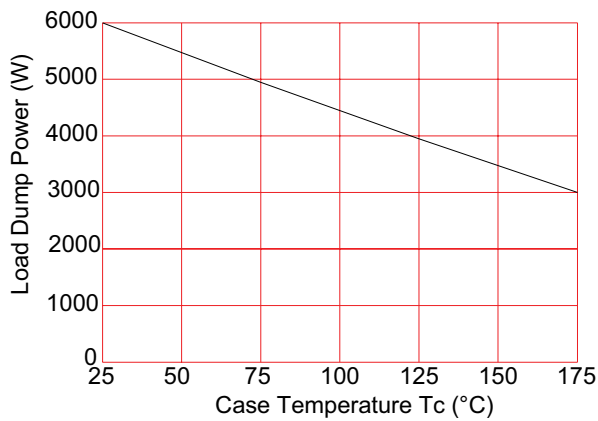


Reverse power capability

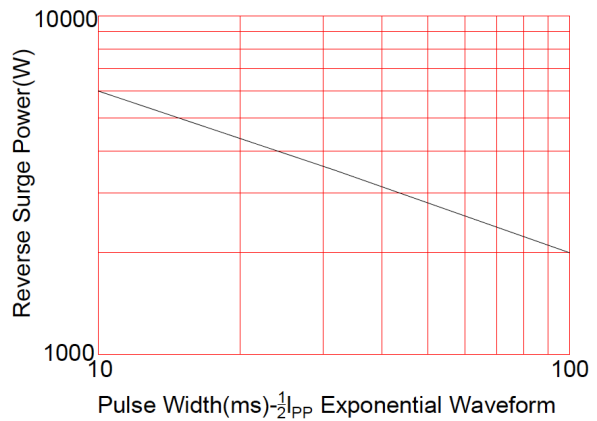

Typical transient thermal impedance

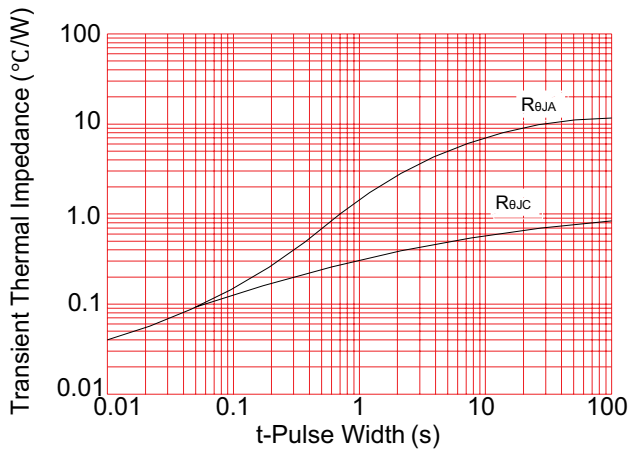


Typical junction capacitance

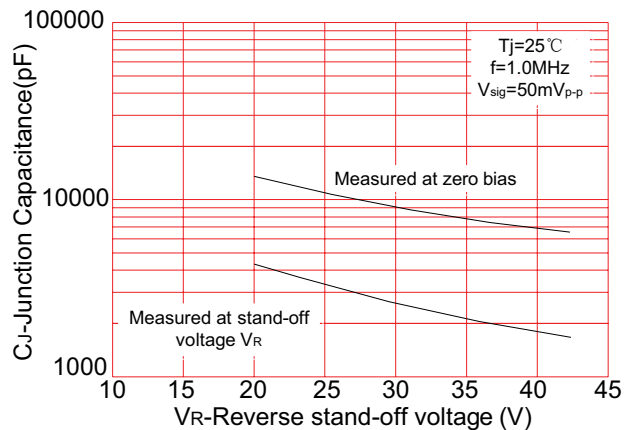


Ratings and V-I characteristic curves (+25 °C unless otherwise noted)

Bi-polar curves


Power derating curve

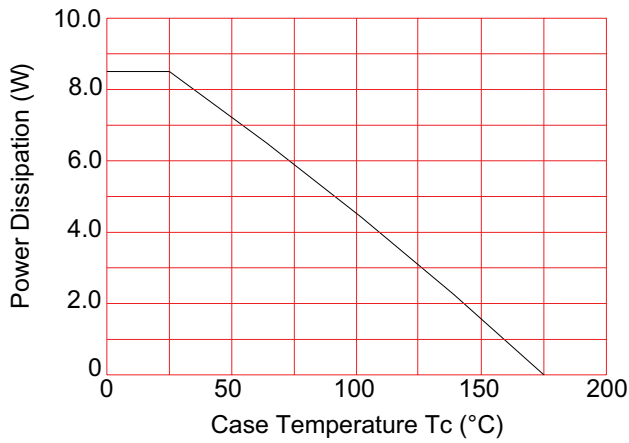


Pulse waveform

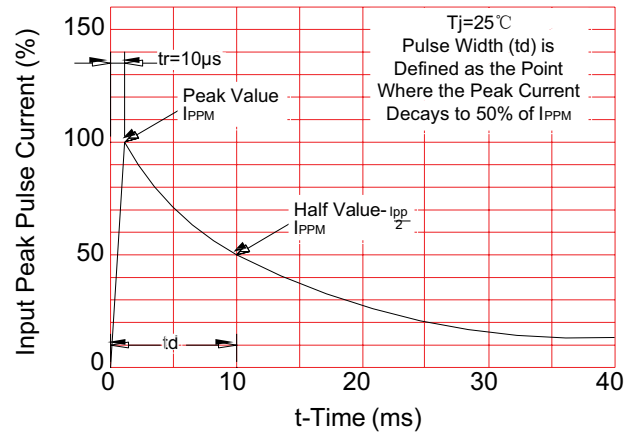


Load dump power characteristics

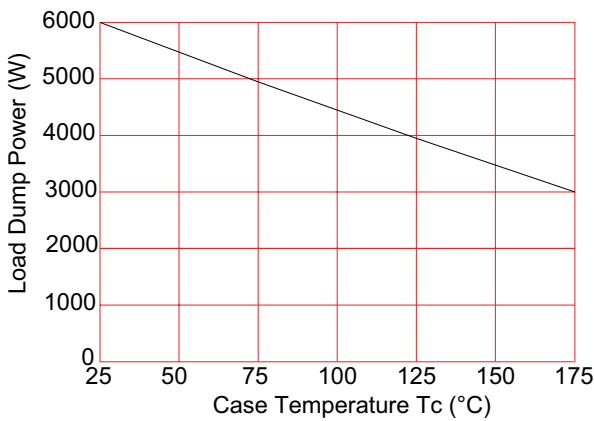


Reverse power capability

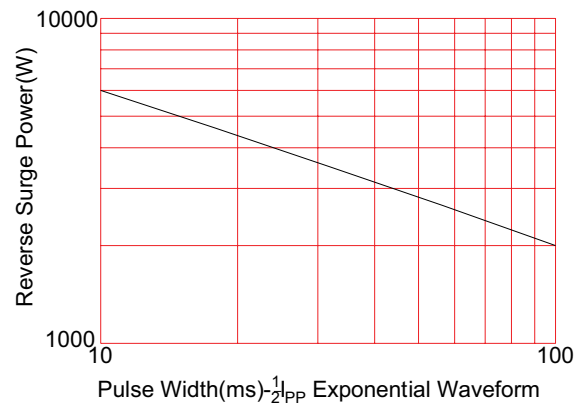

Typical transient thermal impedance

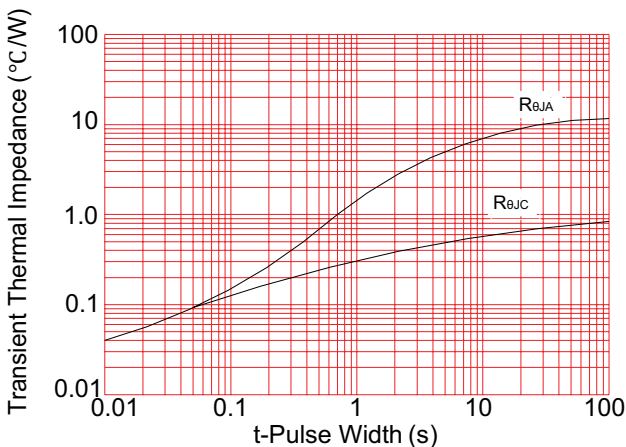

Typical junction capacitance

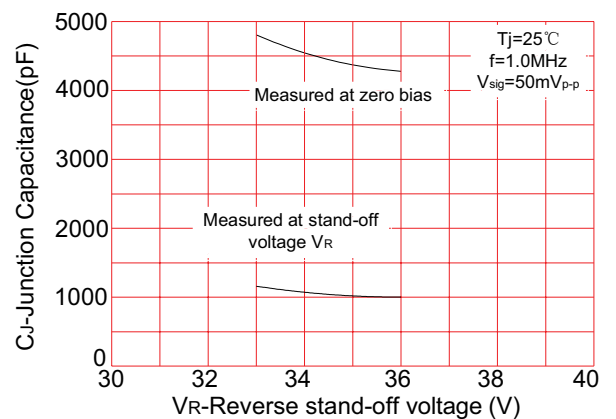

Solder reflow profile

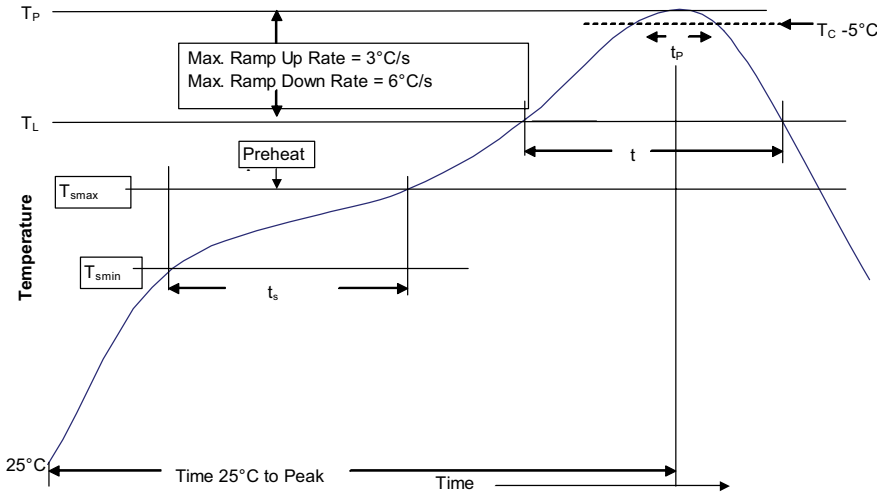


Table 1 - Standard SnPb solder (T_C)

Package thickness	Volume mm ³ <350	Volume mm ³ ≥350
<2.5 mm	235 °C	220 °C
≥2.5 mm	220 °C	220 °C

Table 2 - Lead (Pb) free solder (T_C)

Package thickness	Volume mm ³ <350	Volume mm ³ 350 - 2000	Volume mm ³ >2000
<1.6 mm	260 °C	260 °C	260 °C
1.6 – 2.5 mm	260 °C	250 °C	245 °C
>2.5 mm	250 °C	245 °C	245 °C

Reference J-STD-020

Profile feature	Standard SnPb solder	Lead (Pb) free solder
Preheat and soak		
• Temperature min. (T_{smin})	100 °C	150 °C
• Temperature max. (T_{smax})	150 °C	200 °C
• Time (T_{smin} to T_{smax}) (t_s)	60-120 seconds	60 - 180 seconds
Ramp up rate T_L to T_p	3 °C/ second max.	3 °C/ second max.
Liquidous temperature (T_L)	183 °C	217 °C
Time (t_L) maintained above T_L	60-150 seconds	60-150 seconds
Peak package body temperature (T_p)*	Table 1	Table 2 (+0, -5 °C)
Time (t_p)* within 5 °C of the specified classification temperature (T_C)	20 seconds*	40 seconds*
Ramp-down rate (T_p to T_L)	6 °C/ second max.	6 °C/ second max.
Time 25 °C to peak temperature	6 minutes max.	8 minutes max.

* Tolerance for peak profile temperature (T_p) is defined as a supplier minimum and a user maximum.

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

Eaton
Electronics Division
1000 Eaton Boulevard
Cleveland, OH 44122
United States
Eaton.com/electronics

© 2021 Eaton
All Rights Reserved
Printed in USA
Publication No. ELX1061 BU-ELX21061
June 2021

Eaton is a registered trademark.
All other trademarks are property of their respective owners.

Follow us on social media to get the latest product and support information.

