, PCB terminals, Socket, 5.7 mm, 2-pole, DC Plug/Socket



See below: Approvals and Compliances

Stock-Check, Detailed request for product

Weblinks

## Description

- PCB :

- Drop-in type , rear-side
- Low Voltage DC Plug and Socket
- DC Plug: 2-pole , straight

### **Technical Data**

Diameter	5.7 mm / 2.0 mm	5.7 mm / 2.0 mm		
Number of Poles	2-pole			
Ratings DC	0.5A / 12VDC			
Dielectric Strength	500 VDC			
Insulation Resistance	> 100 MΩ @ 500 VDC			

PCB terminals tin-plated	
3	

pdf data sheet, html datasheet, General Product Information, Distributor-

#### **Approvals and Compliances**

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in Details about Approvals

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.


#### Compliances

The product complies with following Guide Lines

Identification	Details	Initiator	Description
RoHS	RoHS	SCHURTER AG	Directive RoHS 2011/65/EU, Amendment (EU) 2015/863
6	China RoHS	SCHURTER AG	The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.
REACH	REACH	SCHURTER AG	On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.

# 4840.2202

## **Dimensions** [mm]

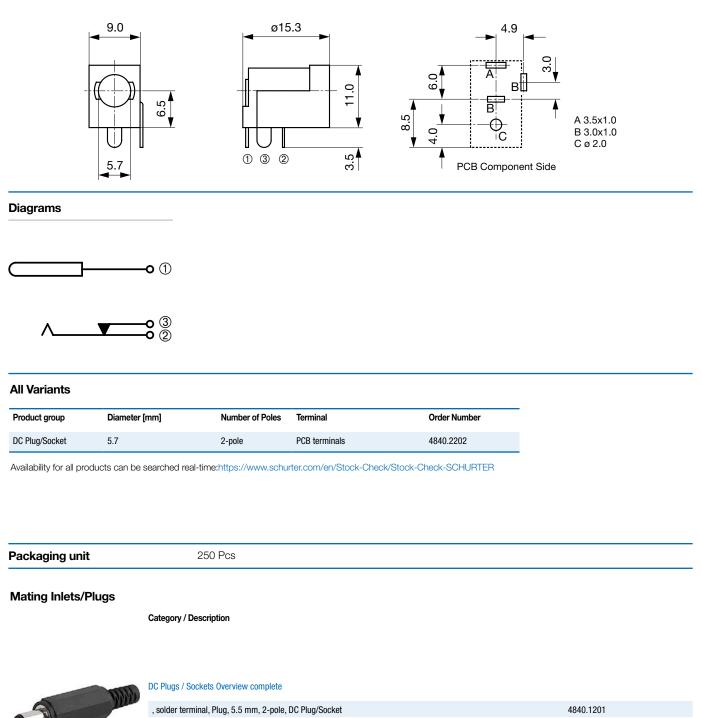

18.08.2023

The specifications, descriptions and illustrations indicated in this document are based on current information. All content is subject to modifications and amendments. Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability and test each product selected for their own applications.