

SPECIFICATION

Part No.	: DBP.915.V.A.30
Description	: Dielectric Band Pass Filter for 915MHz Bandwidth 5MHz
Features	: Center Frequency 915MHz Supports US ISM Radio Applications. Low Insertion Loss Low Pass-Band Ripple High Ultimate Attenuation Dims: 8.7*6*3mm



1. Introduction

Taoglas Taoglas are utilizing their deep understanding of the RF component design and manufacturing process to provide high-quality, small-form-factor, cost-effective and easy to implement RF filters. The Taoglas Filters Division will feature a range of off-the-shelf filters for a variety of applications, including filters for emerging license free bands used for IoT and for GPS L1/L2 and L1/L5 applications. We can also work with customers to develop bespoke filter solutions.

Taoglas dielectric filters are designed to be used in wireless transmitters or receivers. These filters are designed to protect the LNA from noisy out of band emissions originated from nearby transmitters that can overdrive, or even damage your LNA. Overdriving the LNA results in non-linear distortion which negatively impacts the sensitivity of your receiver.

By selecting the proper Taoglas filter you can eliminate unnecessary out of band noise while maintaining minimal in-band insertion loss. The filter is manufactured as a single ceramic block [monoblock] which provides high reliability, low insertion loss and high attenuation in a simple compact SMD package.


The DBP.915.V.A.30 is a standard Taoglas product but can be customized for specific customer needs. For more information please contact your regional sales office.

2. Specification


ELECTRICAL	
Centre Frequency (Fo)	915MHz
3dB Bandwidth	5MHz
Insertion Loss	3.2 dB max
Passband Ripple	0.7 dB max
Return Loss	< -10 dB
Attenuation	> 55.0 dB @ 0 ~ 452MHz > 40.0 dB @ 452MHz ~ 806MHz > 40.0 dB @ 806MHz ~ 849MHz > 10.0 dB @ 849MHz ~ 901MHz > 10.0 dB @ 932MHz ~ 1GHz > 33.0 dB @ 1GHz ~ 2GHz
In/Out Impedance	50 Ω
Power Dissipation	1.0 W min.
MECHANICAL	
Dimension	8.7 x 6 x 3mm (L x W x H)
Material	Ceramic
Finish	Ag plated
ENVIRONMENTAL	
Operating Temperature	-40°C to 85°C
Storage Temperature	-40°C to 85°C
Moisture Sensitivity Level (MSL)	3 (168 Hours)

3. Characteristics Curve

3.1. Pass Band Return & Insertion Loss

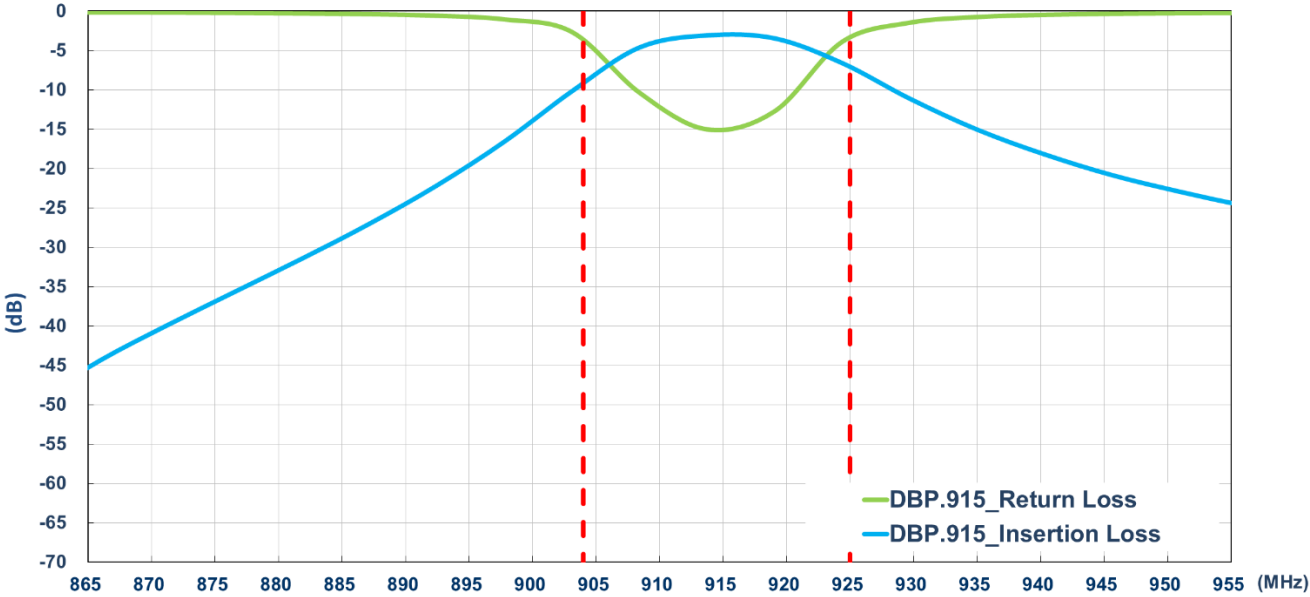


3.2. Out-Of-Band Attenuation

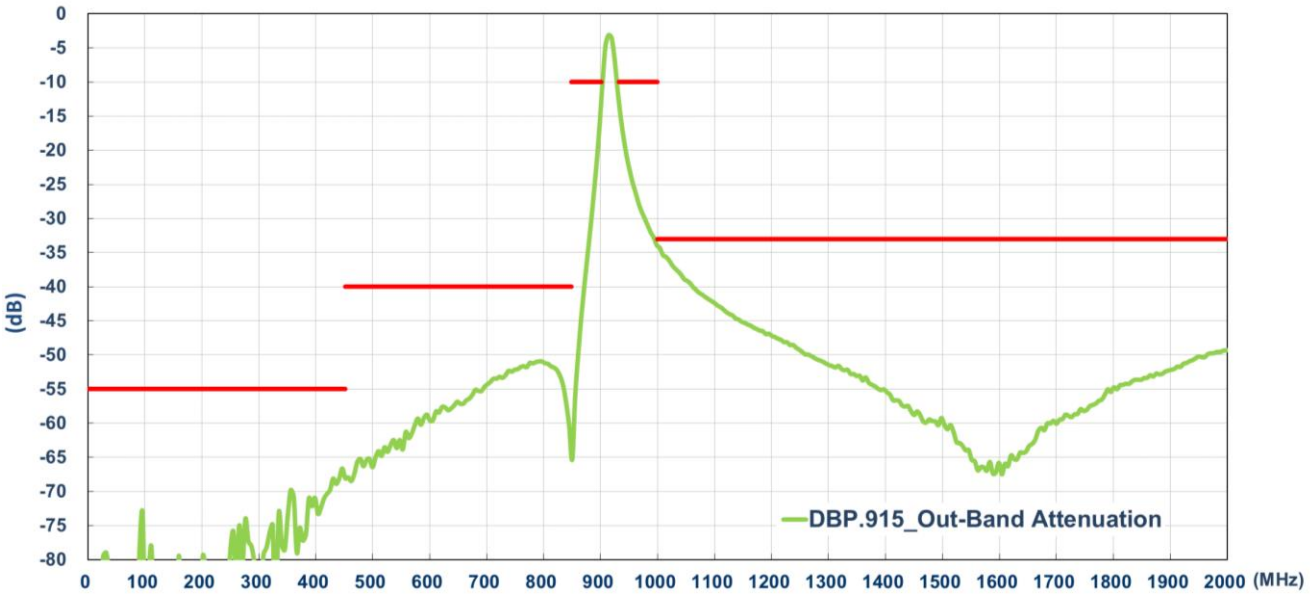


4. Mechanical Drawings (Unit: mm)

4.1. Antenna Drawing


Front View



Side View




Back View

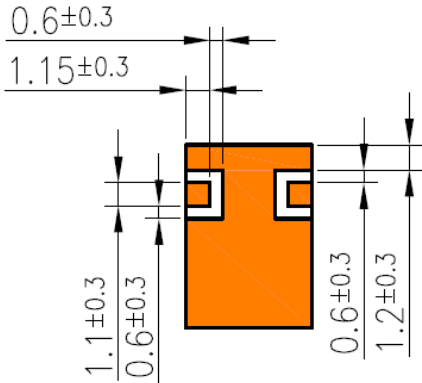




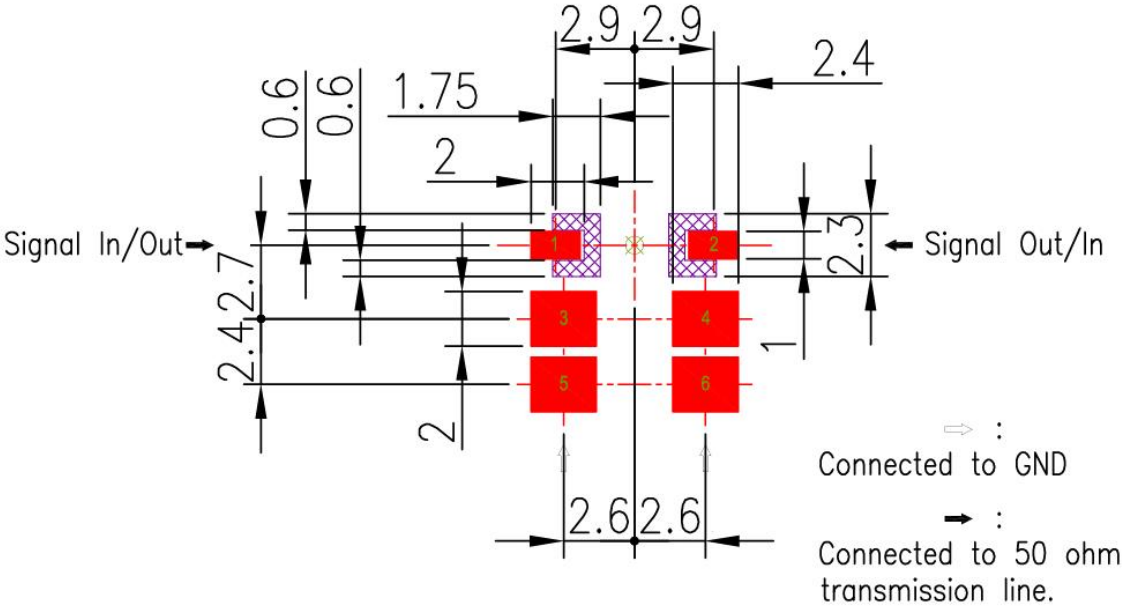


4.2. Recommended PCB Layout

4.2.1. Top Copper

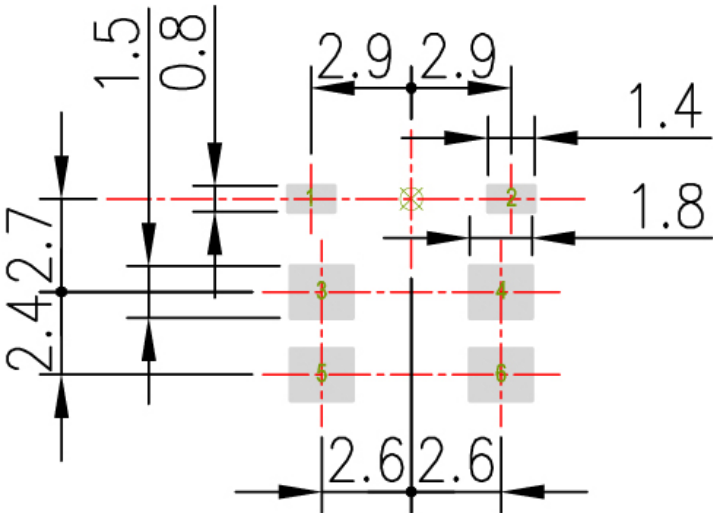


4.2.2. Top Solder Paste




- NOTE:
- 1. Ag Plated area 
 - 2. Solder Mask area 
 - 3. Copper area 
 - 4. Paste area 
 - 5. Copper Keepout Area 
6. Any vias in pads should be either filled or tented to prevent solder from wicking away from the pad during reflow.
 7. The dimension tolerances should follow standard PCB manufacturing guidelines



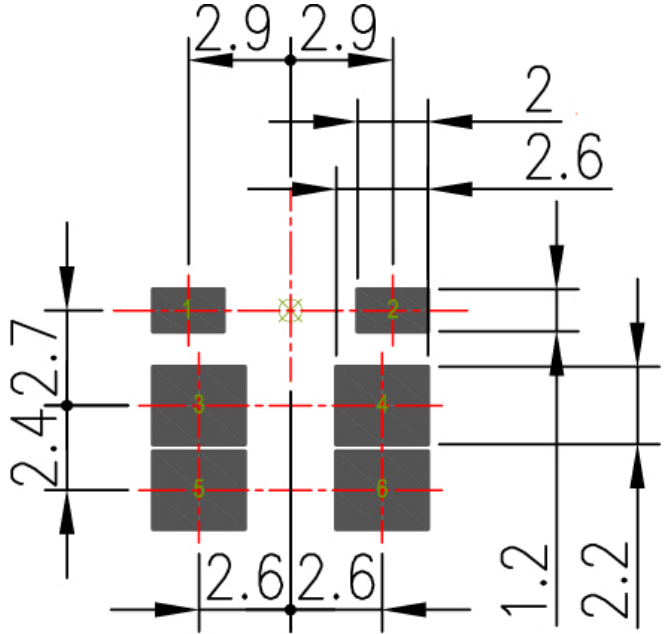


4.2.3. Top Solder Mask

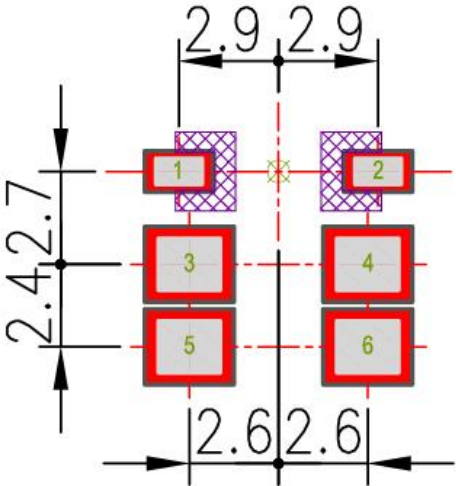

4.2.4. Composite Diagram




NOTE:

- 1. Ag Plated area 
- 2. Solder Mask area 
- 3. Copper area 
- 4. Paste area 
- 5. Copper Keepout Area 

- 6. Any vias in pads should be either filled or tented to prevent solder from wicking away from the pad during reflow.
- 7. The dimension tolerances should follow standard PCB manufacturing guidelines

4.3. Evaluation Board

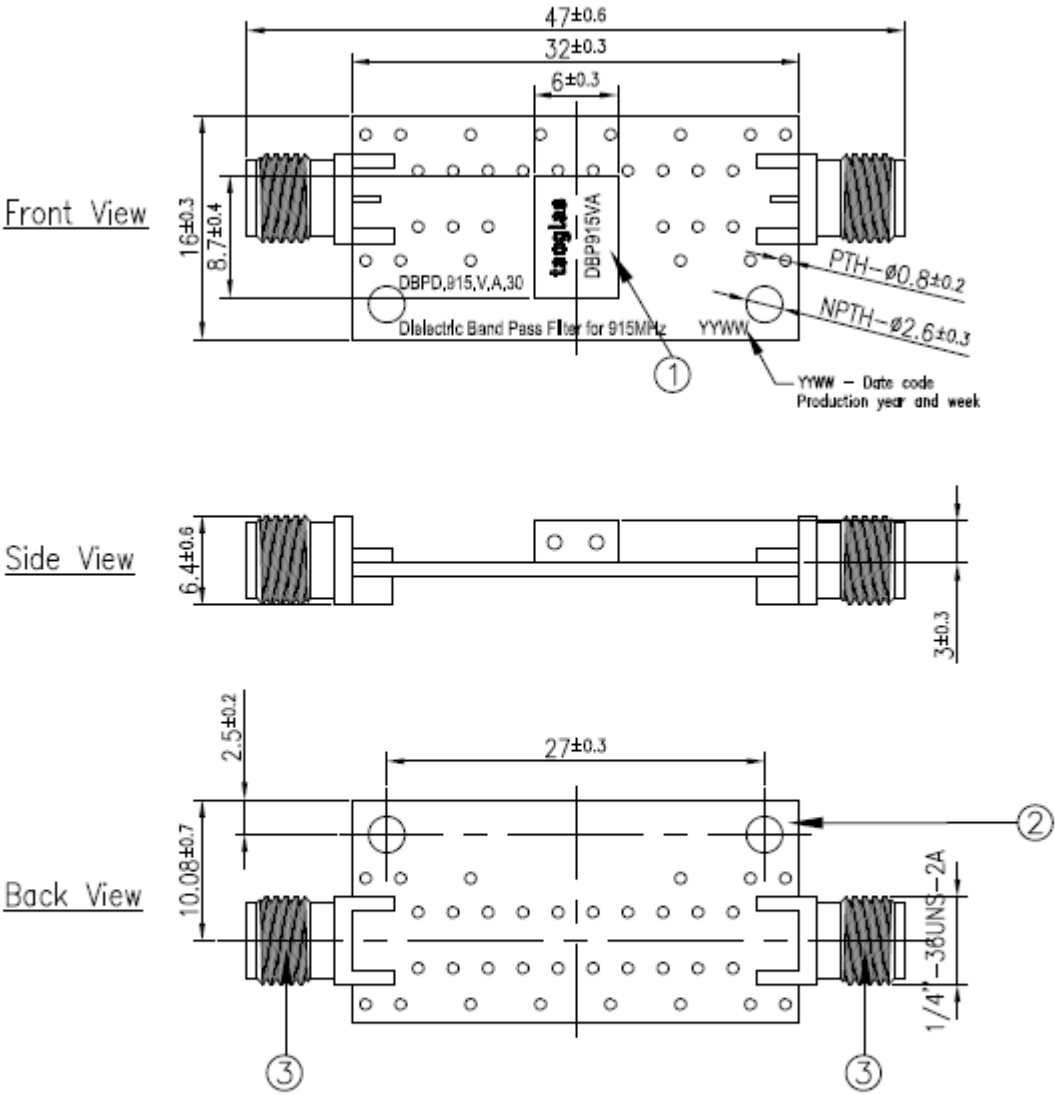


NOTE:
1.All material must be RoHS compliant.

	Name	Material	Finish	Qty
1	Filter	Ceramic	Clear	1
2	PCB	Composite 1.0t	Black	1
3	SMA(F) ST	Brass	Au Plated	2

5. Recommended Reflow Soldering Profile

The DBP.915.V.A.30 can be assembled by following the recommended soldering temperatures are as follows:

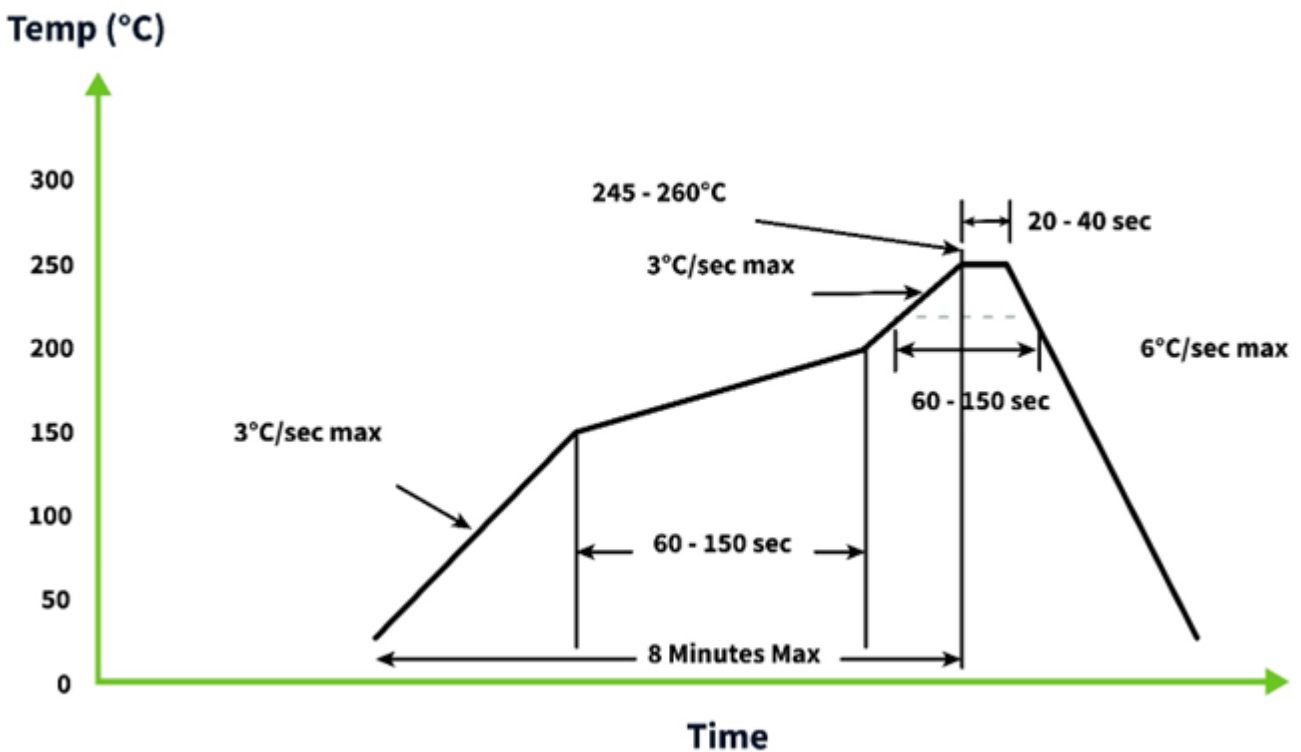


*Temperatures listed within a tolerance of +/- 10° C

Smaller components are typically mounted on the first pass, however, we do advise mounting the DBP.915.V.A.30 when placing larger components on the board during subsequent reflows.


Note: Soldering flux classified ROL0 under IPC J-STD-004 is recommended.

6. Packaging


1000 pc DBP.915.V.A.30
1 reel per small inner box
Dimensions - 330*16.4mm
Weight - 1170g

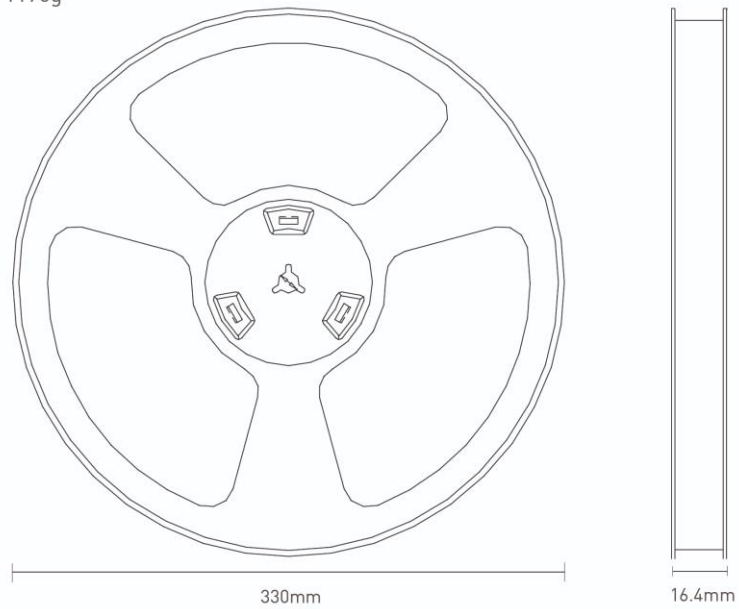


2000 pc DBP.915.V.A.30
2 reel in small inner box
Dimensions - 340*340*51
Weight - 2.47Kg

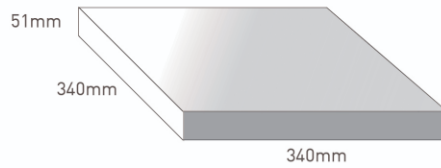

4 inner boxes / 8000 pcs in one carton
Carton Dimensions - 210*345*360mm
Weight - 10.4Kg

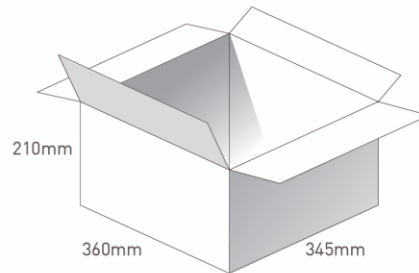

Pallet Dimensions 1100*1100*1280mm
24 Cartons per Pallet
6 Cartons per layer
4 Layers

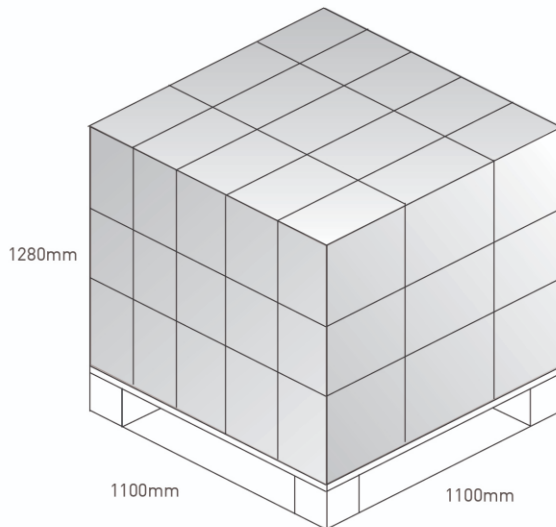

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein.

Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

Copyright © Taoglas Ltd.