
THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES,
ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED
WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES.
ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

ALL DIMENSIONS ARE REFERENCE ONLY

PAR	RFE-6108			
REV	DESCRIPTION	DWN	DATE	APPROVED
-	ENGINEERING RELEASE	czs	8/5/02	JDMc

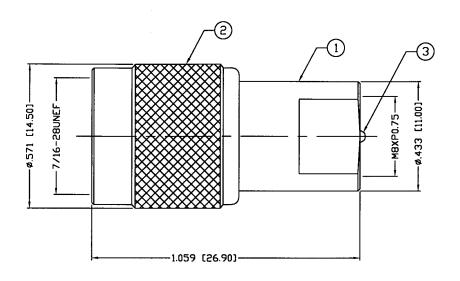

## **SPECIFICATIONS:**

IMPEDANCE: 50 Ohms

FREQUENCY RANGE: 0-2 GHz WORKING VOLTAGE: 335 Vrms

INSULATION RESISTANCE: 5k M ohms min. TEMPERATURE RANGE: -65°C TO +85°C

1 BODY 2 SHELL 3 PIN 4 INSULATOR 5 CASKET	1 BRASS 1 BRASS 1 BRASS 1 PTFE 1 RUBBER	NICKEL, 100 μ" NICKEL, 100 μ" GOLD, 3 μ"	000494	UNLESS OTHERWISE SPECIFI  1. REMOVE ALL BURRS  2. BREAK ALL CORNERS & EDGES .0  3. CHAMFER 1ST & LAST THREADS 45  4. SURFACE ROUGHNESS 63 FINISH W	7610 MIRAMAR RD SAN DIEGO,CA 92126 (858) 549-6340 (858) 549-6340
6 7 8 9			DRAWN	5. DIAMETERS ON COMMON CENTERS CONCENTRIC WITHIN .002 T.I.R. 6. ALL DIMENSIONS ARE AFTER PLATIN DIMENSIONS ARE IN INC AND [MILLIMETERS]	FME PLUG TO TNC PLUG
11 12 13 14 # DESCRIPTION	OTY MATERIAL	FINISH	C. ZUNIGA 8/5/02 CHECKED 8.5-02 ORJ DRAWN 8/5/02 C. ZUNIGA 8/5/02 APPROVALS DATE	UNLESS OTHERWISE NO TOLERANCES ARE:  DECIMALS DIAMETE .XXX±.003 [.08] .XXX±.001 .XX±.003 [.13]	SIZE CABLE GROUP DWG NO.  R [.03] CAD FILE