

# SMT Common Mode Chokes

PM9407.XXXNLT Series



- Ⓜ ER19 Planar Platform
- Ⓜ 24.9x21.6x16.9mm Max
- Ⓜ Up to 39Arms rated current
- Ⓜ 1000Vrms Isolation (380Vrms continuous)

## Electrical Specifications @ 25°C - Operating Temperature -40°C to +125°C

Part Number	Inductance (2,3-5,6)	I <sub>rated</sub>	LK (2,3-5,6) with (7,8,10,11) shorted	Capacitance N1 to N2 (2,3,5,6) to (7,8,10,11)	DCR (2,3-5,6)=(10,11-7,8)	Self Resonant Frequency (2,3-5,6)=(10,11-7,8)	Impedance at SRF
	( $\mu\text{H} \pm 35\%$ )	(A)	( $\mu\text{H TYP}$ )	(pF TYP)	(m $\Omega$ MAX)	(MHz TYP)	(k $\Omega$ TYP)
<b>PM9407.XXXNLT - 24.9mm x 21.6mm x 16.9mm Max</b>							
PM9407.104NLT	120.0	20	0.4	4.3	2.50	1.65	0.73
PM9407.204NLT	200.0	17	0.5	6.4	3.50	1.79	1.08
PM9407.304NLT	280.0	14	0.9	7.0	4.80	1.57	1.60
PM9407.404NLT	360.0	12	1.3	7.2	5.30	1.56	1.72
PM9407.504NLT	480.0	10	1.5	7.8	7.80	1.42	2.35


### NOTE:

- The I<sub>rated</sub> is based upon the temperature rise of the component and represents the rms current which will cause a typical temperature rise of 50°C with free air cooling.
- The temperature of the component (ambient plus temperature rise) must be within the stated operating temperature range.
- Pulse complies to industry standard tape and reel specification EIA481.

## Mechanicals


## Schematic

### PM9407.XXXNLT

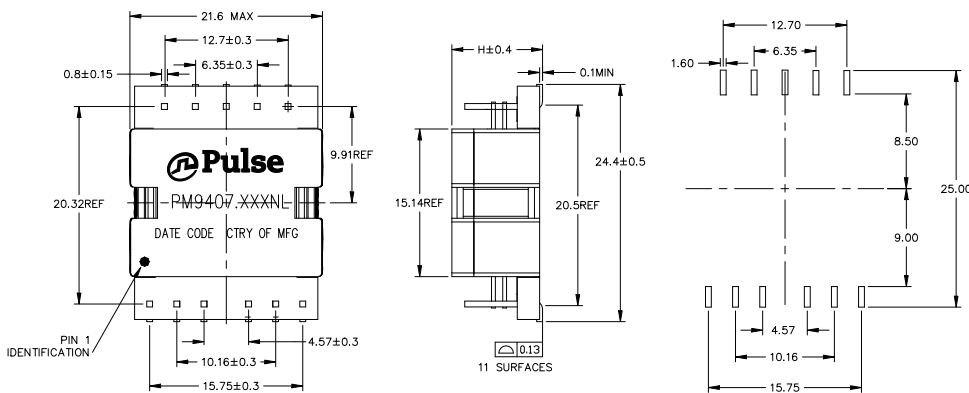

FINAL OUTLINE

SUGGESTED PAD LAYOUT

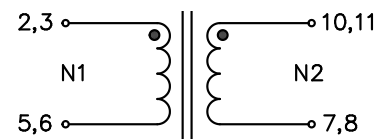

PM9407. Series	H(mm Max)	Weight(g TYP)	Tape & Reel
104NLT	14.8	17.0	100/ Reel
204NLT	14.8	17.7	100/ Reel
304NLT	16.0	18.5	80/ Reel
404NLT	16.9	19.3	80/ Reel
504NLT	16.9	19.3	80/ Reel

Dimensions: mm

Unless otherwise specified, all tolerance are  $\pm 0.25$


# SMT Common Mode Chokes

PM9407.XXXNLT Series

## Impedance Plots

PM9407.XXXNLT

PM9407.XXXNLT

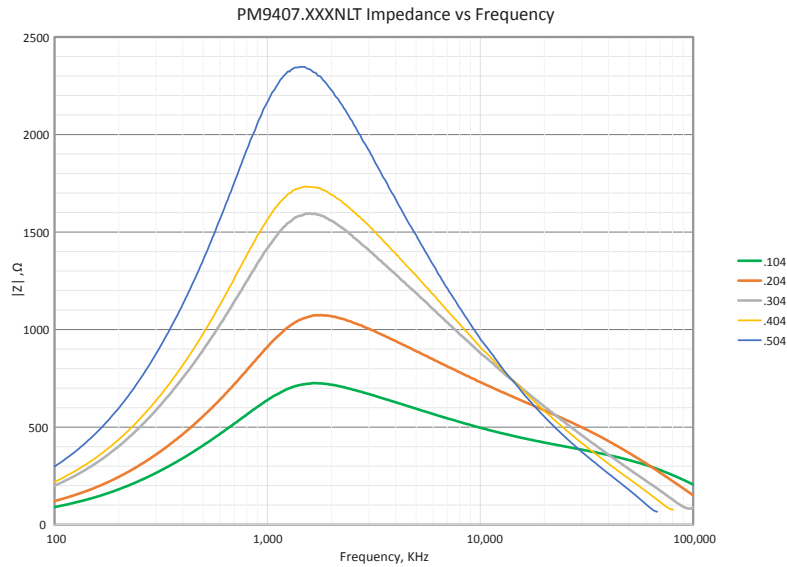

### For More Information:

Americas - [prodinfo\\_power\\_americas@yageo.com](mailto:prodinfo_power_americas@yageo.com) | Europe - [prodinfo\\_power\\_emea@yageo.com](mailto:prodinfo_power_emea@yageo.com) | Asia - [prodinfo\\_power\\_asia@yageo.com](mailto:prodinfo_power_asia@yageo.com)

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2023. Pulse Electronics, Inc. All rights reserved.

YAGEO Corporation and its affiliates do not recommend the use of commercial or automotive grade products for high reliability applications or manned space flight.