

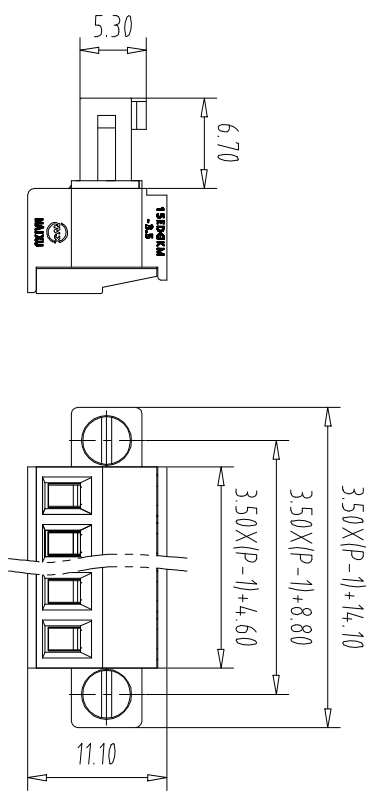


注：本板为禁止转输、复制、编辑文件，以及用其内容进行交流

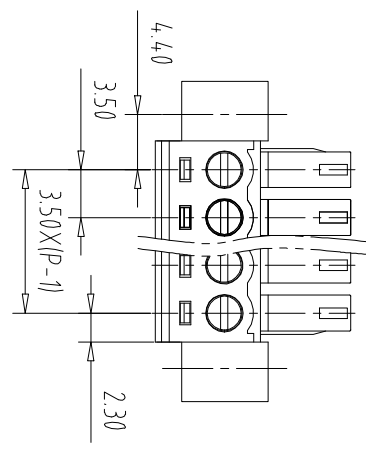

REV	ECN NO.	CONTENT	CHK	DATE

UL Standard

- NOTES1:
- 1.Rating voltage/current: 300V/8A
 - 2.withstanding voltage: AC2000V/1min
 - 3.Torque value: M2.0, 1.77Lb.in
 - 4.Wire range: 28~16AWG
- IEC Standard

Pollution Degree	3	2	2
Overvoltage Category	III	II	II
Rate Impulse Voltage(KV)	2.5KV	2.5KV	2.5KV
Rate Voltage(V)	160V	160V	250V
Rate Current(A)	7A	7A	7A

2. Torque value: M2, 0.2Nm
- 3.wire range: 0.5~1.5mm²

NOTES2:

- 1.Housing: PA66 (UL94V-0)
- 2.Cover: PA66 (UL94V-0)
- 3.Cage: Brass (Ni Plated)
- 4.Clamp: Copper alloy (Ni Plated)
- 5.Screw 1: Steel (M2.0,Zn Plated)
- 6.Screw 2: Steel (M2.5,Zn Plated)

NOTES3:

- 1.Pitch: 3.5mm Poles: 02-24P
- 2.Stripping length: 6-7mm
- 3.Operating temperature: -40℃~+105℃
- 4.RoHS Compliance

How to order

MX15EDGKM - 35 - XXP - XXXX - XX - X - X

产品型号 间距 颜色: 01:常规颜色
 灰色:GY 橙色:OE 02-99:
 蓝色:BU 红色:RD 定制颜色
 黑色:BK 透明色:TT
 绿色:GN 黄色:YW
 透明色:TT 白色:WE

A-Z其他定制
 0-Y一字螺丝
 1-S十字螺丝
 Cu:铜方块
 Fe:铁方块
 2-P:平头十字螺丝

Pitch Range In mm	Nominal Dimension Range In mm						Over 150	0.1/10	±2°
	Over 6	Over 10	Over 24	Over 30	Over 60	Over 100			
TO 6	TO 10	TO 24	TO 30	TO 60	TO 100	TO 150	∠	±2°	
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°	

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	CHK	DATE	SCALE	SHEET/OF	1/1
APP	DATE	DATE	SCALE	A4	1/1
CIXI MAIXU ELECTRONICS CO.,LTD				NAME	MX15EDGKM-3.5-XXP
MAIXU 慈溪市迈旭电子有限公司				DWGNO.	