
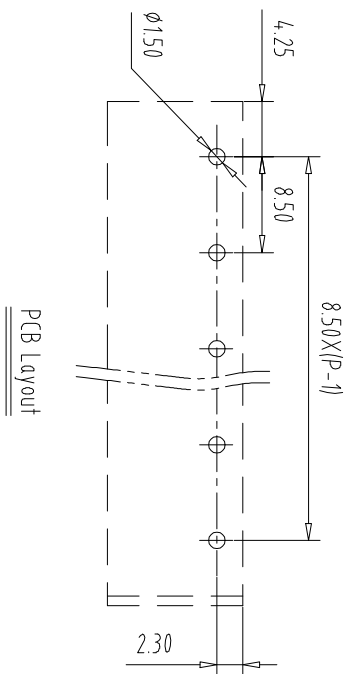
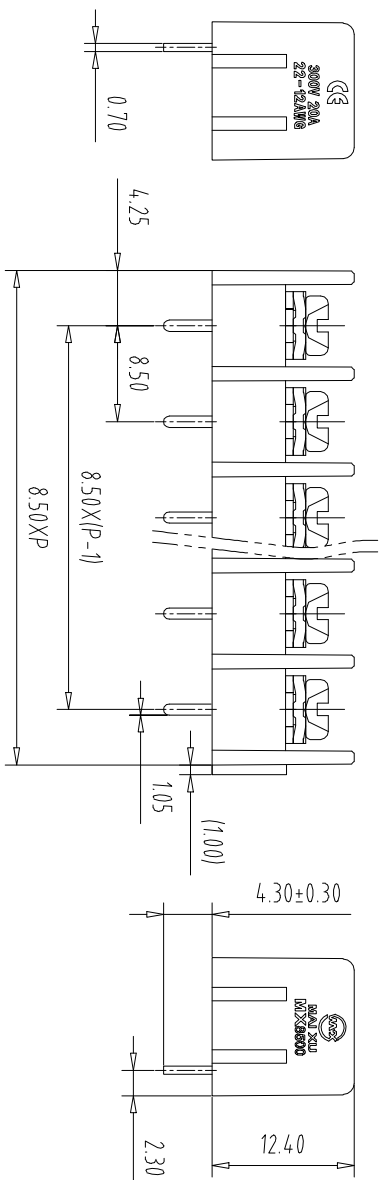


注：本板为禁止传输、复制、编辑文件，以及利用其内容建设数据库

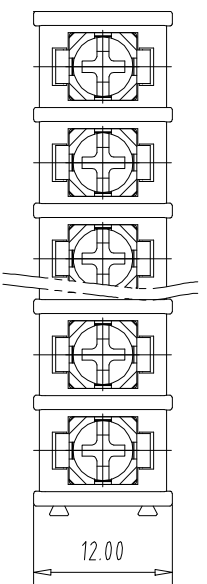


REV	ECN NO.	CONTENT	CHK	DATE

NOTES1:
 UL Standard
 1.Rating voltage/current: 300V/20A
 2.withstanding voltage: AC2500V//1Min
 3.Torque value: M3, 4.43Lb.in
 4.Wire range: 22~12AWG
 IEC Standard
 1.Rating voltage/current: 450V/17.5A
 2.Torque value: M3, 0.5Nm
 3.wire range: 2.5mm²

NOTES2:
 1.Housing: PA66(UL94V-0)
 2.Screw: Steel(M3, Ni Plated)
 3.Solder Pin: Copper alloy(Sn Plated)

NOTES3:
 1.Pitch: 8.50mm Poles: 02-24P
 2.Operating temperature: -40℃~+105℃
 3.RoHS Compliance

How to order

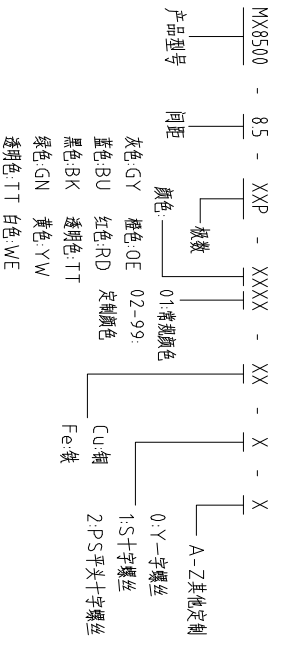

Pitch Range	In mm	Nominal Dimension	Range
Over 6	Over 10	Over 30	Over 60
TO 6	TO 10	TO 30	TO 60
Over 10	Over 24	Over 60	Over 100
TO 10	TO 24	TO 60	TO 100
Over 150	Over 150	Over 150	Over 150
TO 150	TO 150	TO 150	TO 150
±0.15	±0.20	±0.30	±0.50
±0.20	±0.30	±0.50	±0.70
±0.30	±0.50	±0.70	±1.00
±0.50	±0.70	±1.00	±1.30
±1.30	±1.50	±1.50	±2.0

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	CHK	DATE	UNITS	MM	1/1
APP	DATE	SCALE	SCALE	A4	1/1
CIXI MAIXU ELECTRONICS CO.,LTD			NAME	MX8500-8.5-XXP	
MAIXU 慈溪市迈旭电子有限公司			DWGNO.		