


** Not all features are shown in this drawing. For more detailed information, please contact your Fair-Rite representative.

UNCONTROLLED ~CATALOG~ DRAWING

SIZE	PART NO.	REV.
B	2944778101	~

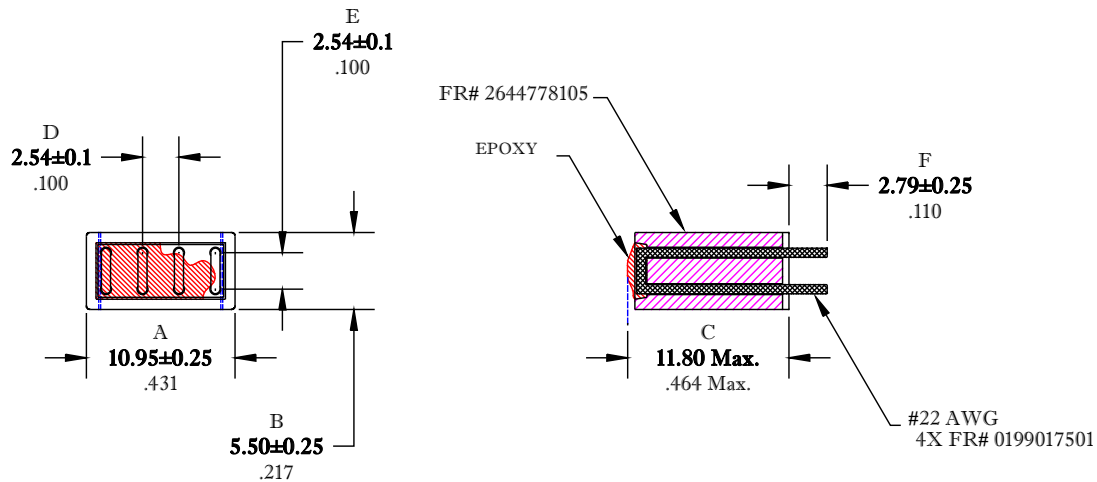

ELECTRICAL SPECIFICATIONS

Impedance (Ohms)	
25 MHz	100 MHz
150 Min.	230 Min.

DIMENSIONS
BOLD NUMBERS ARE IN MILLIMETERS
 LIGHT NUMBERS ARE IN INCHES

NOTES:

- 1 - CHIPS, CRACKS, AND APPREANCE TO MEET FAIR-RITE PRODUCTS VISUAL INSPECTION CRITERIA FOR GENERIC "PC" BEADS.
- 2 - IMPEDANCE MEASURED ON A HP4191A USING A 16092A TEST FIXTURE AT AN END WINDING.
- 3 - WIRE MEETS SOLDERABILITY SPECIFICATION WHEN TESTED PER FAIR-RITE PRODUCTS CORP. SOP# ELC-57.
- 4 - PART MEETS FAIR-RITE PRODUCTS CORP. SOP# ELC-55, FOR THERMAL SHOCK RESISTANCE.
- 5 - EPOXY TO BE INSULCAST LN 15-16 WITH A MIX RATIO OF 1:1, OR EQUIVALENT.

FAIR-RITE PRODUCTS CORP.				
TITLE				
.100 FOUR-LINE PC BEAD				
DRAWN BY	DATE	SIZE	PART NO.	REV.
J.SERENCISCS	06-29-2018	B	2944778101	~
CHKD BY		SCALE: NONE		SHEET 1 OF 1
APPRVD BY				