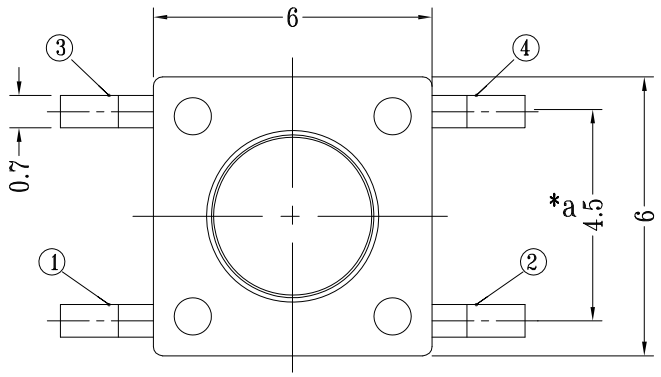

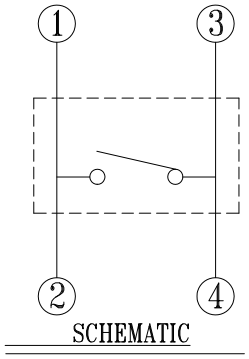

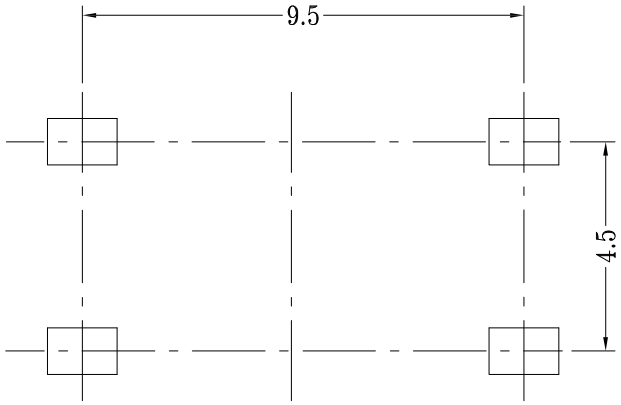

P.C.B LAYOUT
TOP VIEW

注:"*"表示关键尺寸(4个).

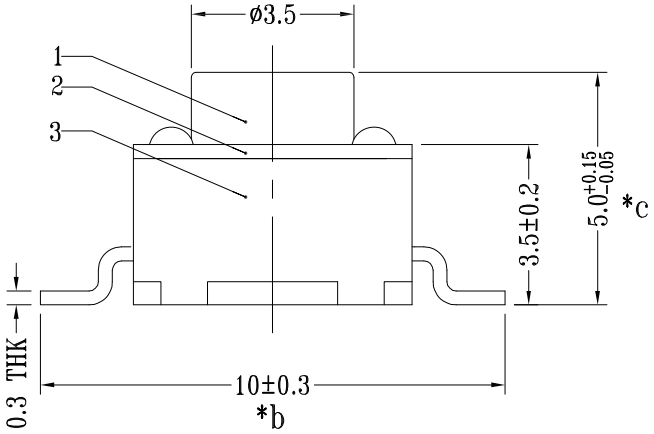

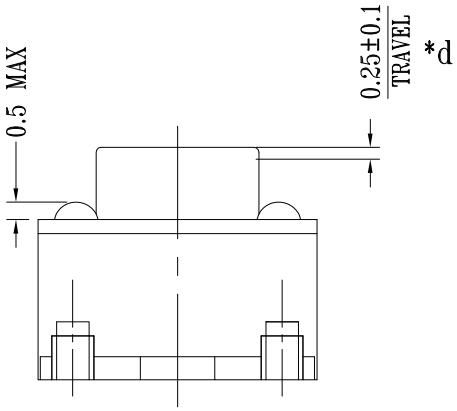

SPECIFICATION
1.Rating: DC 12V 50mA Max
2.Contact resistance: 100mΩ MAX
3.Insulation resistance: 100MΩ Min
4.Dielectric strength: 250VAC/min
5.Operating force: 160gf±50gf
6.Operating life: 30,000 cycles(1Ω Max)

TOLERANCE UNLESS SPECIFIED
WITHIN 1.5mm : ±0.1mm
OVER 1.5mm : ±0.2mm

NO.	PARTS	MATERIALS	Q'TY	FINISH
5	CONTACT	PBS C5210R-EH	1	Ag Plated
4	TERMINAL	BRASS	2	Ag Plated
3	COVER	SPCC	1	Ni Plated
2	KNOB	PPA	1	BLACK
1	BASE	PPA	1	BLACK

版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.

D·SWITCH
东莞市德崧电子有限公司
D-SWITCH ELECTRONICS CO.,LTD

版本 VERSION	A0	比例尺 SCALE	1:1	日期 DATE	2021.09.02	品名 TITLE	图号 DRAWING NO
核准 APPROVED BY		核对 CHECKED BY		绘图 DRAWN BY	孙成	DS-03XG-160H5	XXXXXXX

File Code:DS-WI-E-03_A0