ROHS
Compatible

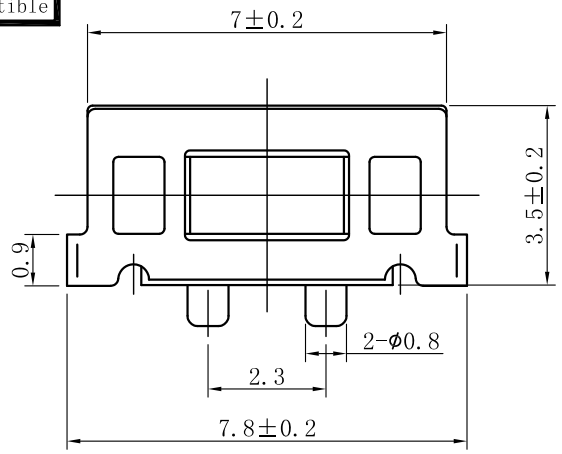

CIRCUIT DIAGRAM

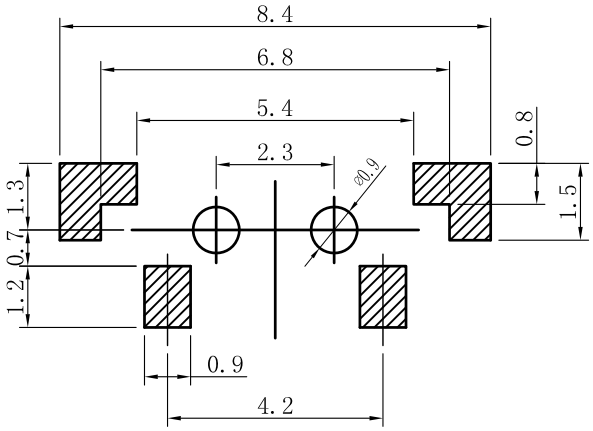

P.C.B LAND DIMENSION

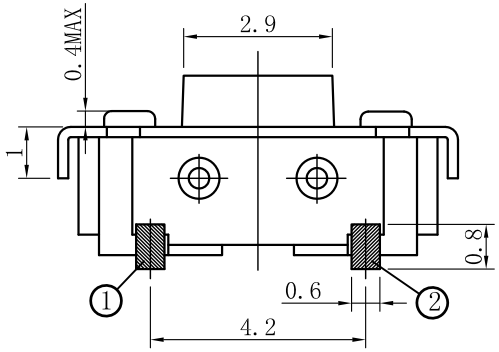

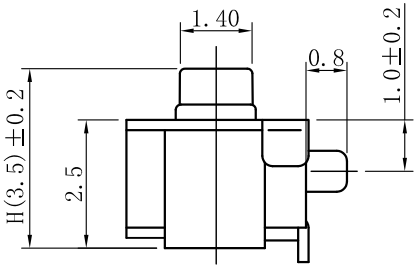

SPECIFICATION
1. Rating:DC 12V 50mA Max
2. Contact resistance: 100mΩ MAX
3. Insulation resistance: 100MΩ Min
4. Dielectric strength: 250VAC/min
5. Operating force: 250gf±50gf
6. Operating life: 50,000 cycles

REFERENCE DRAWING

UNSPECIFIED TOLERANCE 未指定的公差	
ANGULAR(角度)	±0.5°
16 < L ≤ 63	±0.4
4 < L ≤ 16	±0.3
L ≤ 4	±0.2

NO(序号)	PART NAME(部件名)	QTY(数量)	MATERIAL(材料)	REMARK(备注)
5	COVER(盖 板)	1	H65Y	Nickel tin
4	STEM(按 钮)	1	LCP	BLACK
3	CONTACT FORM(弹 片)	1	STAINLESS STEEL	Ag plating
2	TERMINAL(端 子)	1	H65Y	Ag plating
1	HOUSING(基 座)	1	LCP	WHITE

D-SWITCH
东莞市德崧电子有限公司
D-SWITCH ELECTRONICS CO.,LTD

版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.

版 本 VERSION	A0	比例尺 SCALE	1:1	日 期 DATE	2022.04.15	品 名 TITLE	图 号 DRAWING NO
核 准 APPROVED BY		核 对 CHECKED BY		绘图 DRAWN BY	孙成	DS-THBM02-LAC-R	XXXXXXX