


60V N-Channel Power MOSFET

DESCRIPTION

The IRFR1205TR uses advanced trench technology to provide excellent RDS(ON), low gate charge. It can be used in a wide variety of applications.

KEY CHARACTERISTICS

- ① V_{DS} = 60V, I_D = 30A
- RDS(ON) < 30mΩ @ V_{GS}=10V
- RDS(ON) < 40mΩ @ V_{GS}=4.5V
- ② High density cell design for lower Rdson
- ③ Fully characterized avalanche voltage and current
- ④ Good stability and uniformity with high EAS
- ⑤ Excellent package for good heat dissipation

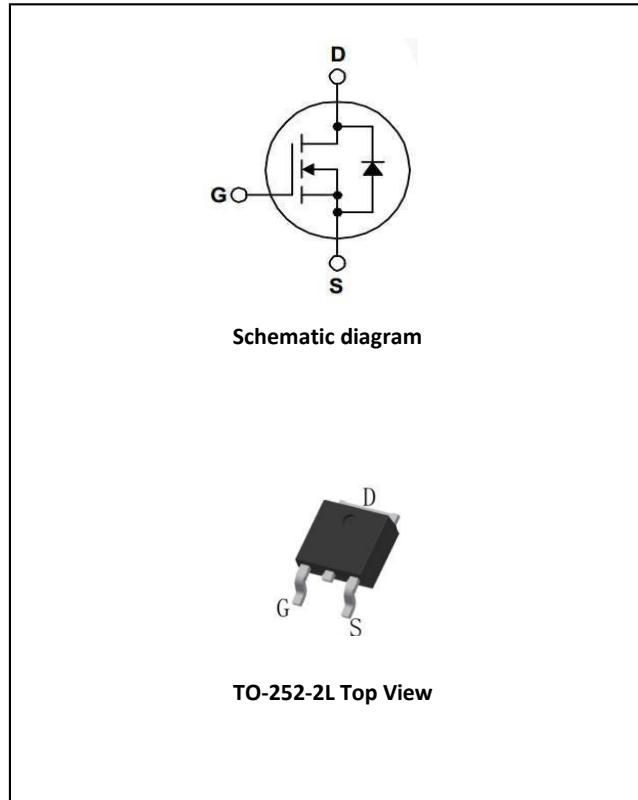

Application

- ① Power switching application
- ② Hard switched and High frequency circuits
- ③ Uninterruptible power supply

Package Marking And Ordering Information

Device Marking	Ordering Codes	Package	Product Code	Packing
IRFR1205TR	IRFR1205TR	TO-252	IRFR1205TR	Reel

Absolute Maximum Ratings (TA=25°C unless otherwise noted)

Parameter	Symbol	Limit	Unit
Drain-Source Voltage	V _{DS}	60	V
Gate-Source Voltage	V _{GS}	±20	V
Drain Current-Continuous	I _D	30	A
Drain Current-Pulsed (Note 1)	I _{DM}	80	A
Maximum Power Dissipation(Tc=25°C)	P _D	44	W
Single pulse avalanche energy ^(Note 2)	E _{AS}	56	mJ
Operating Junction and Storage Temperature Range	T _J , T _{STG}	-55 To 175	°C

Thermal Characteristic

Thermal Resistance,Junction-to-Case	R _{θJC}	3.4	°C/W
-------------------------------------	------------------	-----	------

Electrical Characteristics (TA=25 °C unless otherwise noted)

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Off Characteristics						
Drain-Source Breakdown Voltage	V _{DSS}	V _{GS} =0V, I _D =250μA	60	-	-	V
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} =60V, V _{GS} =0V	-	-	1	μA
Gate-Body Leakage Current	I _{GSS}	V _{GS} =±20V, V _{DS} =0V	-	-	±100	nA
On Characteristics						
Gate Threshold Voltage	V _{GS(th)}	V _{DS} =V _{GS} , I _D =250μA	1.3	1.8	2.3	V
Drain-Source On-State Resistance ^(Note 3)	R _{DS(ON)}	V _{GS} =10V, I _D =10A	-	25	30	mΩ
		V _{GS} =4.5V, I _D =10A	-	30	40	
Forward Transconductance	g _{FS}	V _{DS} =5V, I _D =10A	-	11	-	S
Dynamic Characteristics						
Input Capacitance	C _{iss}	V _{DS} =25V, V _{GS} =0V, f=1.0MHz	-	670	-	pF
Output Capacitance	C _{oss}		-	76	-	pF
Reverse Transfer Capacitance	C _{rss}		-	66	-	pF
Switching Characteristics (Note 4)						
Turn-on Delay Time	t _{d(on)}	V _{DD} =30V, ID=10A, V _{GS} =10V, R _{GEN} =10Ω	-	19.2	-	nS
Turn-on Rise Time	t _r		-	6.4	-	nS
Turn-Off Delay Time	t _{d(off)}		-	29.2	-	nS
Turn-Off Fall Time	t _f		-	8.2	-	nS
Total Gate Charge	Q _g	V _{DS} =48V, I _D =10A V _{GS} =10V	-	21	-	nC
Gate-Source Charge	Q _{gs}		-	5	-	nC
Gate-Drain Charge	Q _{gd}		-	6.5	-	nC
Drain-Source Diode Characteristics						
Diode Forward Voltage	V _{SD}	V _{GS} =0V, I _s =20A	-	-	1.2	V
Reverse Recovery Time	T _{rr}	T _j =25 °C, IF=10A, di/dt=100A/uS ^(note3)	-	33.6	-	nS
Reverse Recovery Charge	Q _{rr}		-	32.1	-	nC

Notes:

1.Repetitive Rating: Pulse width limited by maximum junctiontemperature.

2.EAS condition :T j=25 °C,VDD=30V,VGS=10V,L=0.5mH,Rg=25Ω

3.Pulse Test: Pulse Width ≤ 300μs, Duty Cycle ≤ 2%.

4.Guaranteed by design, not subject to production.

Characteristics Curves

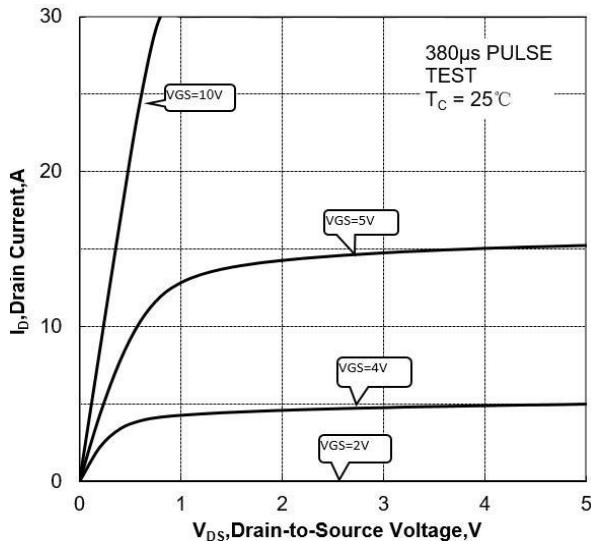
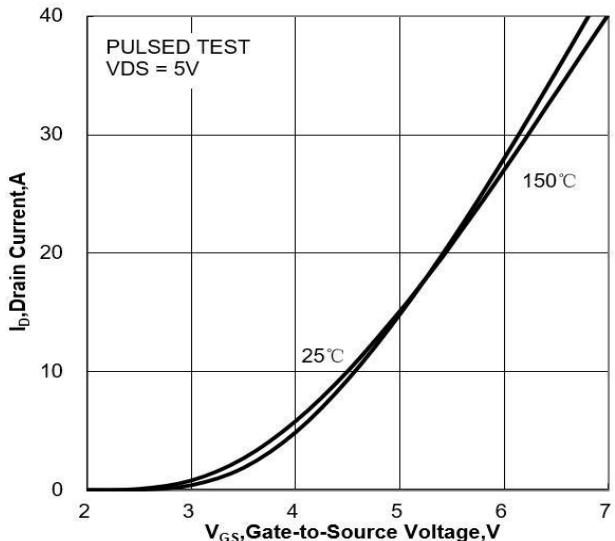
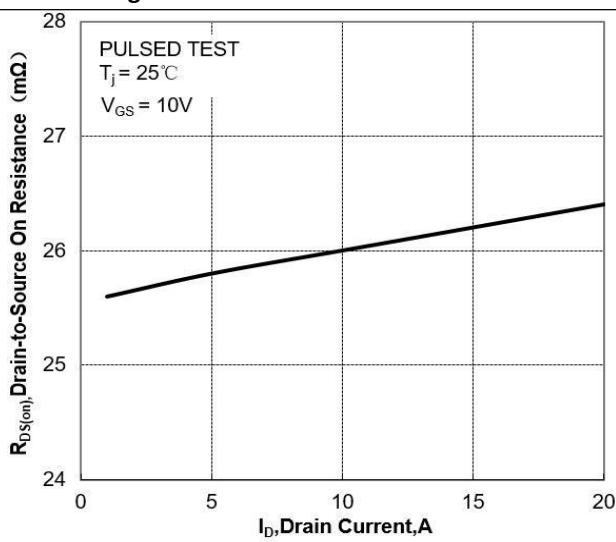
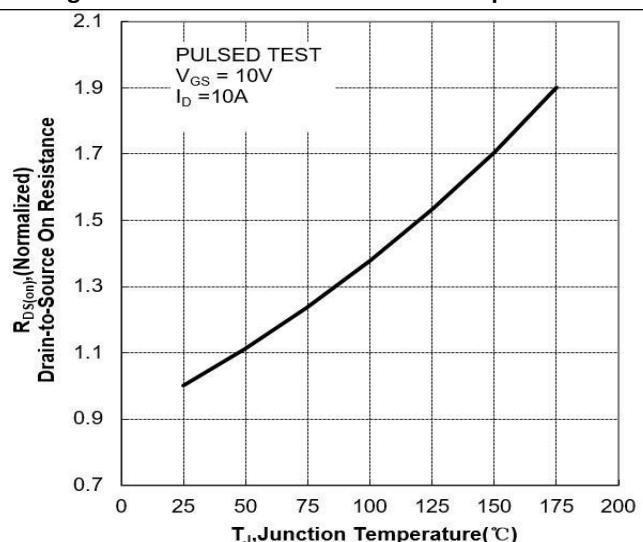
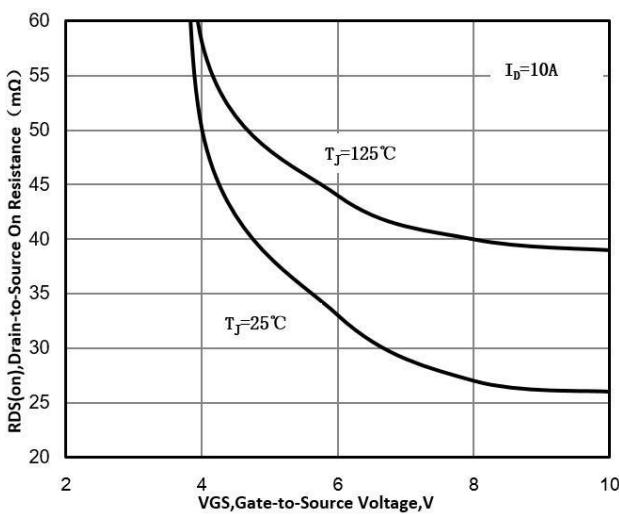
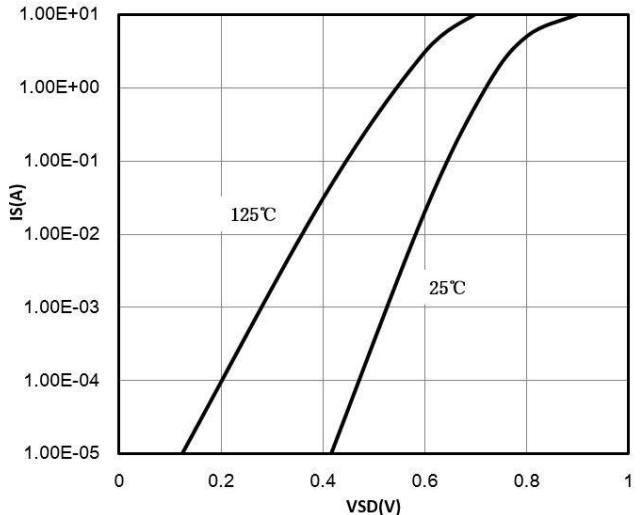
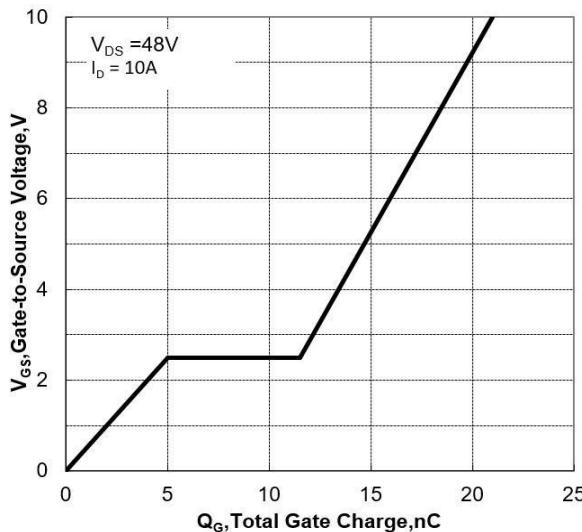
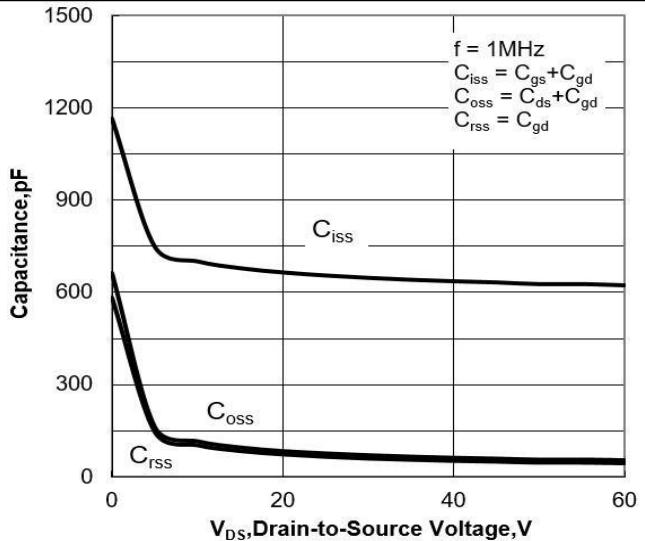
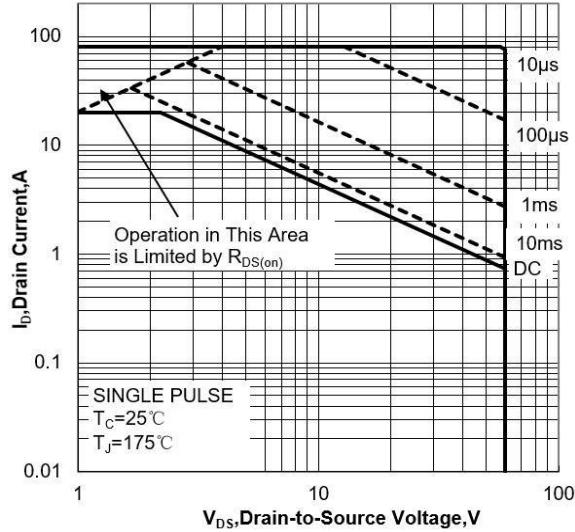
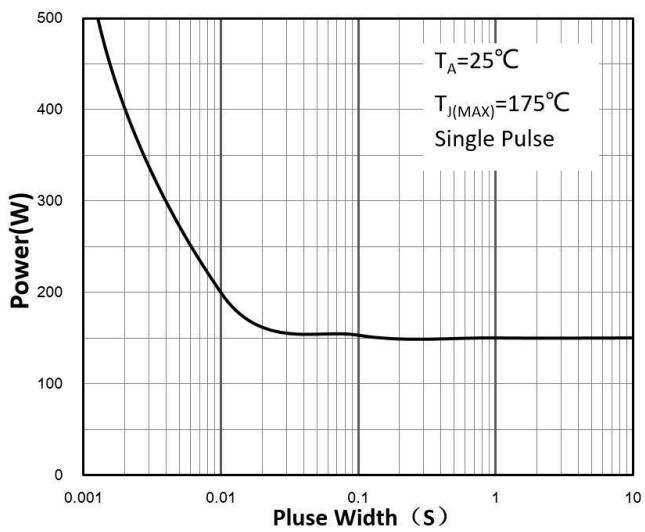
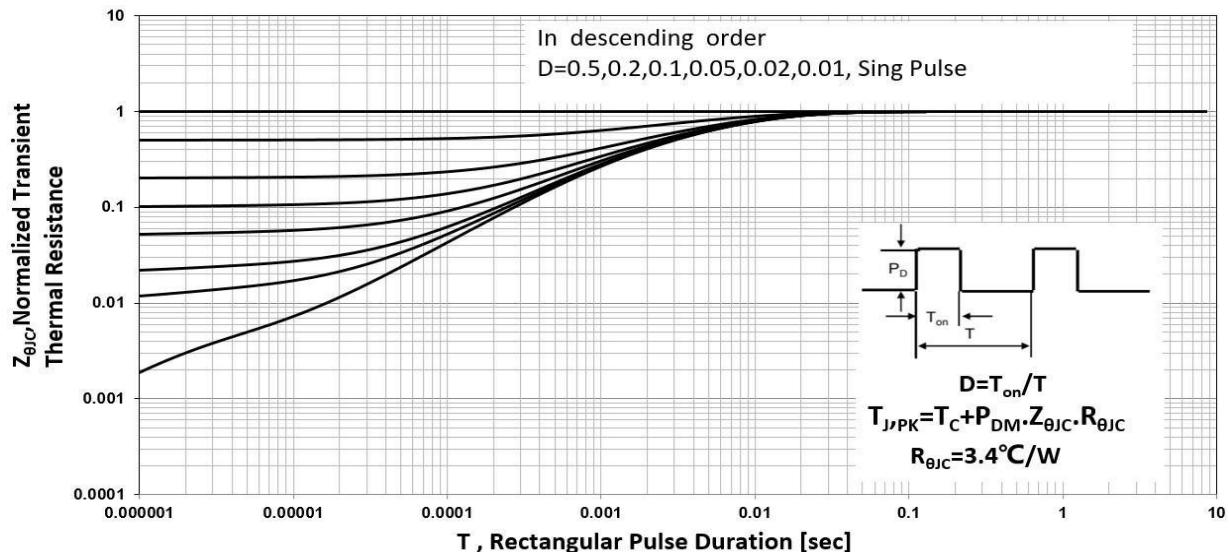
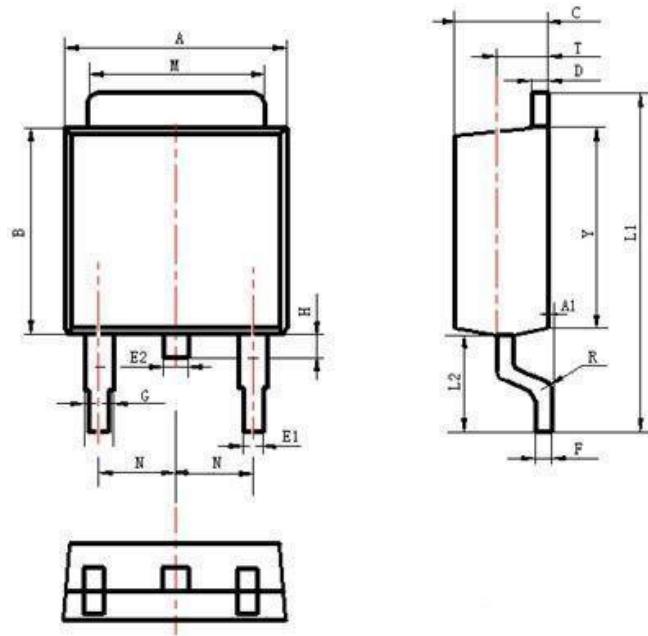
Figure 1 Output Characteristics

Figure 2 Transfer Characteristics

Figure 3 On-Resistance vs. I_D and V_{GS}

Figure 4 On-Resistance vs. Junction Temperature

Figure 5 On-Resistance vs. V_{GS}

Figure 6 Body Diode Forward Voltage


Figure 7 Gate-Charge Characteristics

Figure 8 Capacitance Characteristics

Figure 9 Maximum Forward Biased Safe Operation Area

Figure 10 Single Pulse Power Rating

Figure 11 Normalized Maximum Transient Thermal Impedance


Test Circuit and Waveform

Gate Charge Test Circuit	Gate Charge Test Waveform
Resistive Switching Test Circuit	Resistive Switching Test Waveforms
Unclamped Inductive Switching (UIS) Test Circuit	Unclamped Inductive Switching (UIS) Test Waveforms
Diode Recovery Test Circuit	Diode Recovery Test Waveforms

Package Description



Items	Values(mm)	
	MIN	MAX
A	6.30	6.90
A1	0	0.13
B	5.70	6.30
C	2.10	2.50
D	0.30	0.60
E1	0.60	0.90
E2	0.70	1.00
F	0.30	0.60
G	0.70	1.20
L1	9.60	10.50
L2	2.70	3.10
H	0.60	1.00
M	5.10	5.50
N	2.09	2.49
R	0.3	
T	1.40	1.60
Y	5.10	6.30

TO-252 Package



迈诺斯科技

IRFR1205TR

NOTE:

1. Exceeding the maximum ratings of the device in performance may cause damage to the device, even the permanent failure, which may affect the dependability of the machine. Please do not exceed the absolute maximum ratings of the device when circuit designing.
2. When installing the heat sink, please pay attention to the torsional moment and the smoothness of the heat sink.
3. MOSFETs is the device which is sensitive to the static electricity, it is necessary to protect the device from being damaged by the static electricity when using it.
4. Shenzhen Minos reserves the right to make changes in this specification sheet and is subject to change without prior notice.

CONTACT:

深圳市迈诺斯科技有限公司（总部）

地址：深圳市福田区华富街道田面社区深南中路4026号田面城市大厦22B-22C

邮编：518025

电话：0755-83273777