

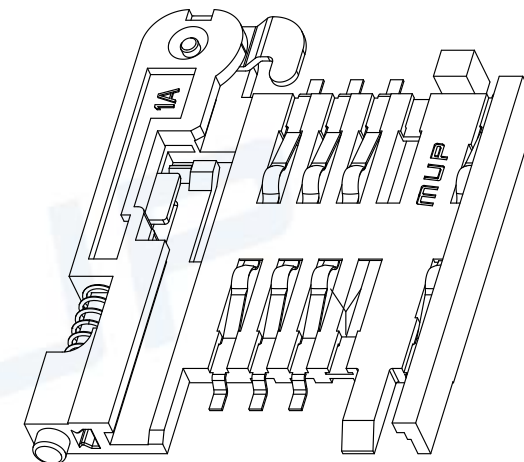
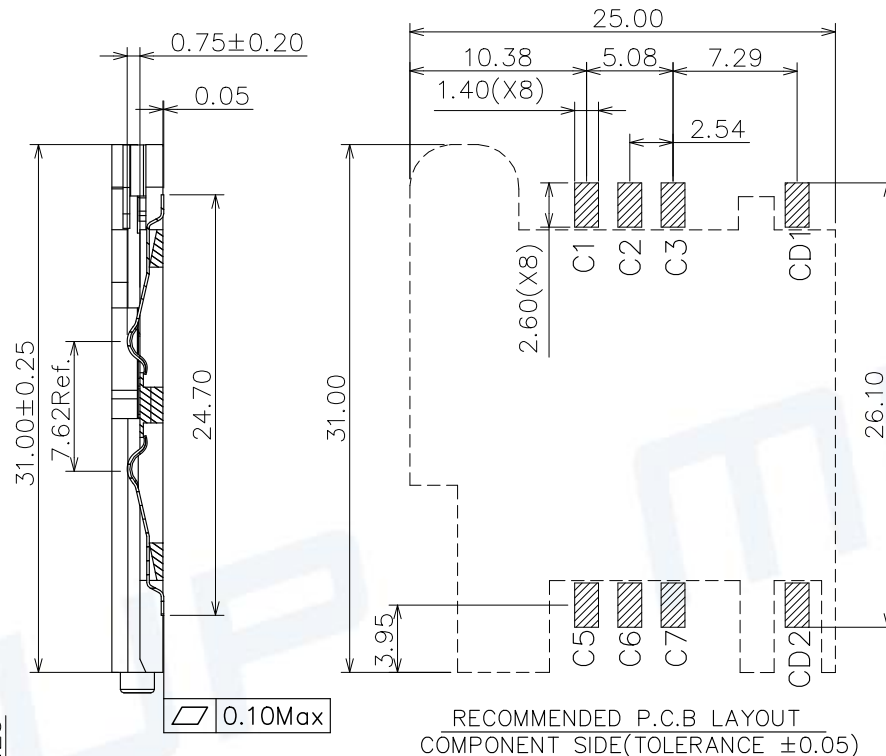


REV.	DESCRIPTION OF REVISIONS	APPR.	CHKD.	DRAW.	DATE
1	NEW			Zoey	2006/10/10
2	Original Model: C716-3			HUABO	2023/10/25

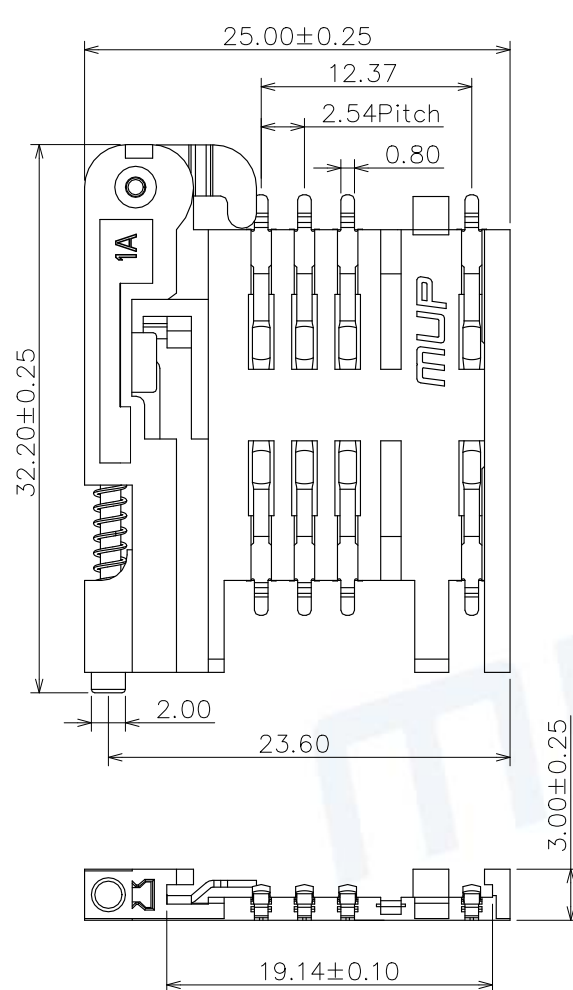

ELECTRIC FUNCTION	DETECT SWITCH
WITHOUT CARD	OPEN
CARD INSERTED	CLOSED

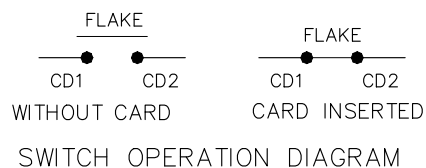

TECHNICAL CHARACTERISTICS

1.General Characteristics

Durability: 5,000 cycles min.

2.Electrical Characteristics

Contact resistance: Initial: 50mΩ Max.

After Test: 100mΩ Max.

Insulation resistance: >1000MΩ/500V DC

3.Solderability

IR reflow: 250°C, 5sec. Max

Manual soldering: 370°C, 3sec. Max

4.Environmental Characteristics

Operating temperature: -40°C~+85°C

Operating humidity: 10%~+95%RH

ITEM	PART NAME	Q'TY	MATERIAL	FINISH
1	BASE	1	Hi-temp Thermoplastic	Black UL94V-0
2	DATA CONTACT	8	Copper Alloy	Contact area: 15u" Au plated
3	HANDLE	1	Hi-temp Thermoplastic	Yellow UL94V-0
4	SPRING	1	SWP	
5	POLE	1	Stainless Steel	
6	AXIS	1	Copper Alloy	Ni plated over all
7	TOGGLE LEVER	1	Stainless Steel	

Unless otherwise specified, other tolerance are:

X	±0.35	X'	±5°
X.X	±0.25	X.X'	±4°
X.XX	±0.15	X.XX'	±3°
X.XXX	±0.10	X.XXX'	±2°

PROJ.	UNIT	SCALE
PROJ.	mm	1:1

CUSTOMER DRAWING

MUP®
MUP INDUSTRIAL CO.,LTD.

NAME: **SIM Card Connector**

MODEL NO: **MUP-C7016-03**

TYPE: **without post 6p**

DRAWN	Zoey Oct.10.2006
CHECKED	Jimmy Oct.10.2006
APPROVAL	Jun Oct.10.2006

DWG NO.:	DWG-C7016-03-01
SHEET	1/1
REVISION	2

