
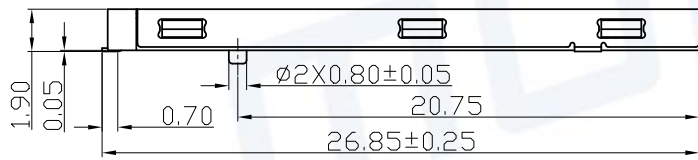
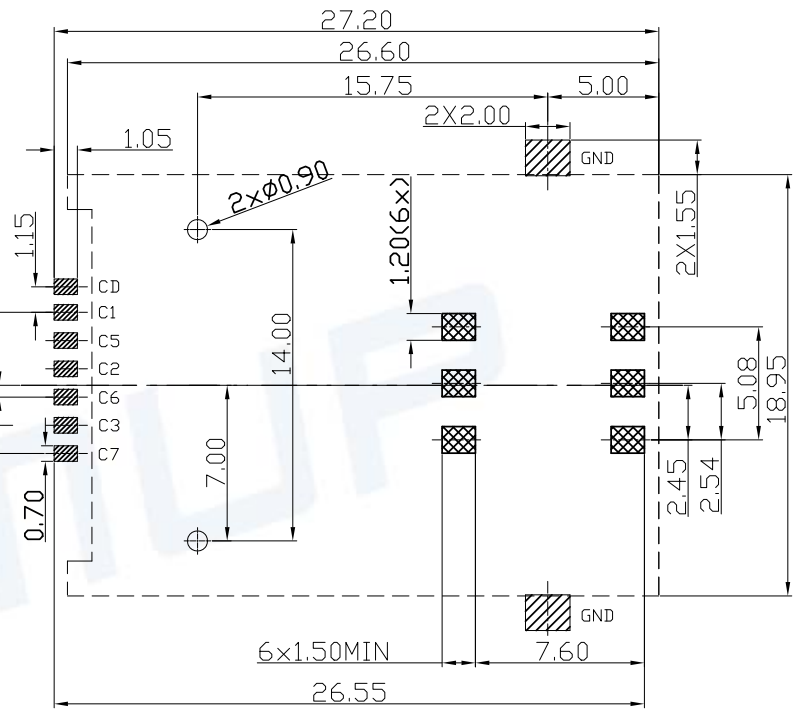
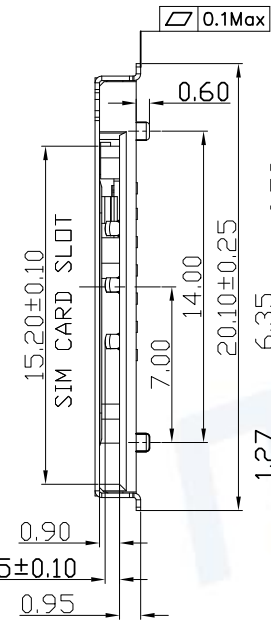


REV.	DESCRIPTION OF REVISIONS	APPR.	CHKD.	DRAW.	DATE
△	NEW			Seanw	2015/4/06
△	Original Model C753-3			Henry	2023/10/18

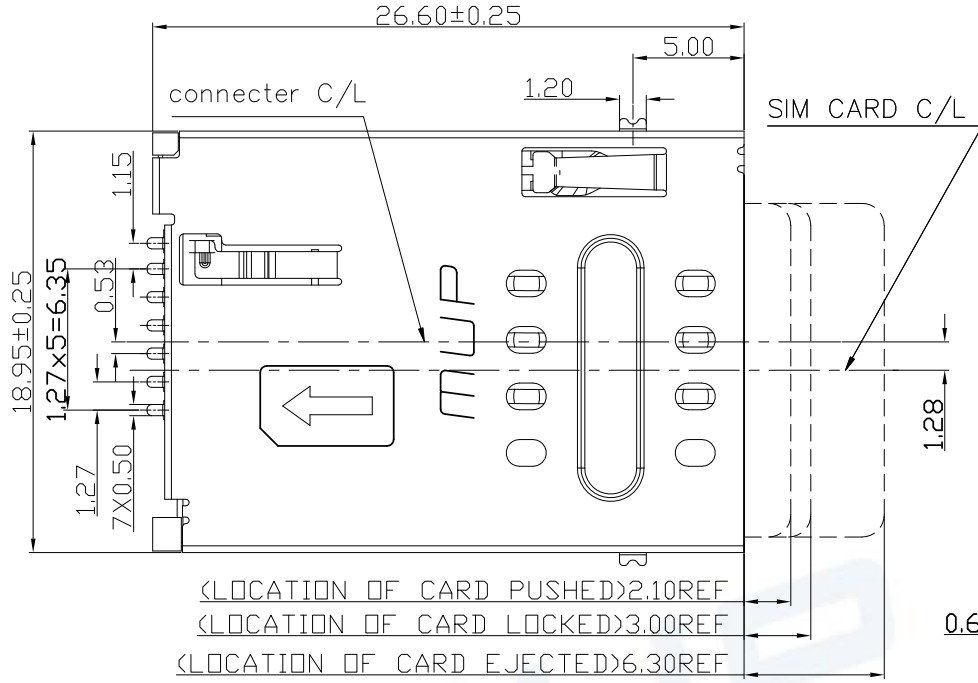

SIM CARD	
Pin No.	NAME
C1	VCC
C2	RST
C3	CLK
C5	GND
C6	VPP
C7	I/O
CD	CARD DETECT SWITCH

**TECHNICAL CHARACTERISTICS**  
 1.General Characteristics  
 Dimensions:26.60LX18.85WX2.00H mm  
 Weight:Approx 1.70g±0.2g  
 Durability:5,000 cycles min.  
 2.Electrical Characteristics  
 Contact resistance:50mΩ typical,  
 100mΩMax  
 Insulation resistance:>1000M/500V DC  
 3.Solderability  
 Vapor phase:215°C, 30sec.Max  
 IR reflow:260°C,5sec.Max  
 Manual soldering:370°C,3sec.Max  
 4.Environmental Characteristics  
 Operating temperature:-40°C~+85°C  
 Operating humidity:10%~+95%RH

ELECTRIC FUNCTION	DETECT SWITCH
WITHOUT CARD	CLOSED
CARD INSERTED	OPEN



ITEM	PART NAME	Q'TY	MATERIAL	FINISH
1	HOUSING	1	Hi-temp Thermoplastic	Black UL94V-0
2	SHELL	1	Stainless Steel	SMT area:Gold plated
3	DATA CONTACT	6	Copper Alloy	Contact area:Gold plated
4	HEART CAM	1	Hi-temp Thermoplastic	Black UL94V-0
5	COLL SPRING	1	SWP	
6	CAM PIN	1	Stainless Steel	
7	SWITCH CONTACT	1	Copper Alloy	Contact area:Gold plated

Unless otherwise specified, other tolerance are:

**MUP MUP INDUSTRIAL CO.,LTD.**

NAME: **SIM CARD CONNCTOR**  
 MODEL NO: **MUP-C7053-03**  
 TYPE: **With Post / 6PIN/Normally close**

PROJ.	UNIT	SCALE	DRAWN	DWG NO.:
①	mm	1:1	Seanw Apr.06.2015	DWG-C7053-03-01
CUSTOMER DRAWING			CHECKED	SHEET
			Henry Apr.06.2015	1/1
			APPROVAL	REVISION
			Simon Apr.06.2015	2

