


## MCMB-0530 Series

### High Current Molded Power Inductors

#### FEATURES

- Powder iron core material
- Magnetically shielded, low EMI
- High current carrying capacity, Low core losses
- Frequency range up to 3MHz
- Operate temperature range ....  $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$  (Including self temp. rise)
- RoHS compliant



#### APPLICATIONS


- Voltage Regulator Module (VRM)
- Multi-phase regulators
- Point-of-load modules
- Smart phone POL modules
- SSD modules
- Notebook regulators
- Battery power systems
- Graphics cards
- Data networking and storage systems

#### Explanation of Part Number

MCMB -0530 -1R0 M T

1 2 3 4 5

- ◆ 1:Product Series:Carbonyl Molding Power Inductor
- ◆ 2:Dimensions:
- ◆ 3: Initial inductance value: 1R0 = 1.0uH
- ◆ 4:Tolerance of Inductance:M:±20%
- ◆ 5:Packing:Tape Carrier Package

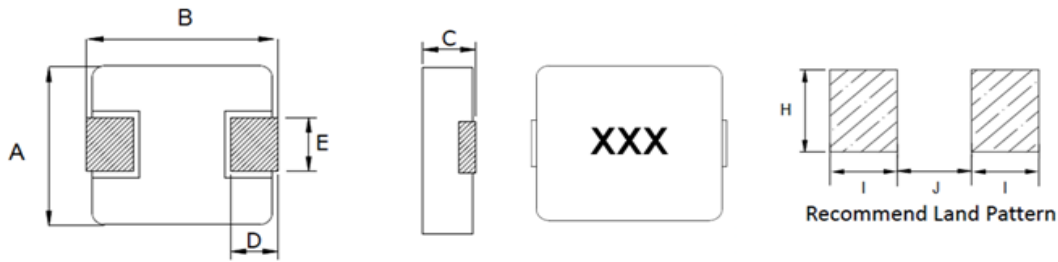**Dimensions: [mm]**


Series	A	B	C	D	E	I Typ.	J Typ.	H Typ.
MCMB-0530	5.2±0.2	5.4±0.35	2.8±0.2	1.2±0.2	2.2±0.3	1.9	2.2	2.5

**Electrical Properties:**


Part Number	Inductance	DC Resistance	Saturation Current		Heat Rating Current	
	@100KHz, 1V	Max.	Max.	Typ.	Max.	Typ.
Units	μH	mΩ	A		A	
Symbol	L	DCR	Isat		Irms	
MCMB-0530-R10MT	0.10±20%	3	24.0	30.0	23.0	25.0
MCMB-0530-R20MT	0.20±20%	3.9	16.0	20.0	13.0	14.0
MCMB-0530-R33MT	0.33±20%	5.5	14.4	18.0	13.1	14.0
MCMB-0530-R47MT	0.47±20%	8.5	12.0	15.0	10.0	11.0
MCMB-0530-R68MT	0.68±20%	12	9.20	11.5	8.20	9.00
MCMB-0530-R82MT	0.82±20%	10.4	9.20	10.5	9.00	10.5
MCMB-0530-1R0MT	1.0±20%	14	8.00	10.0	7.80	8.50
MCMB-0530-1R2MT	1.2±20%	16	7.60	9.50	7.85	8.50
MCMB-0530-1R5MT	1.5±20%	25	7.20	9.00	7.60	8.20
MCMB-0530-2R2MT	2.2±20%	29	5.60	7.00	6.40	7.00
MCMB-0530-3R3MT	3.3±20%	38	4.80	6.00	5.00	5.50
MCMB-0530-4R7MT	4.7±20%	60	3.68	4.60	4.00	4.50
MCMB-0530-6R8MT	6.8±20%	90	2.88	3.60	2.90	3.50
MCMB-0530-100MT	10±20%	125	2.80	3.50	2.80	3.20
MCMB-0530-150MT	15±20%	170	2.00	2.20	1.60	1.80

**Notes**


- ※1: All test data is referenced to 20°C ambient;
- ※2: Rated current: Isat or I<sub>rms</sub>, whichever is smaller;
- ※3: Isat(Typ): DC current at which the inductance drops approximate 30% from its value without current;
- ※4: Isat(Max): DC current at which the inductance drops approximate 20% from its value without current;
- ※5: I<sub>rms</sub>(Typ): DC current that causes the temperature rise (ΔT =40°C) from 20°C ambient.
- ※6: I<sub>rms</sub>(Max): DC current that causes the temperature rise (ΔT =20°C) from 20°C ambient.
- ※7: Absolute maximum voltage 30VDC

## TYPICAL ELECTRICAL CHARACTERISTICS


**MCMB-0530-R10MT**

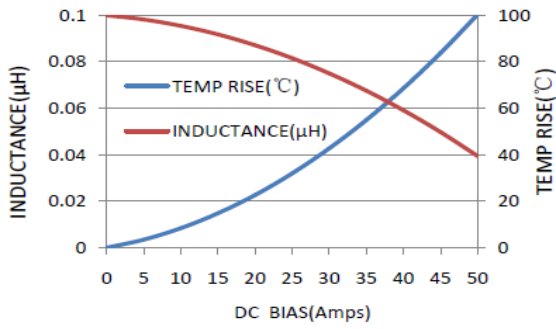


**MCMB-0530-R20MT**

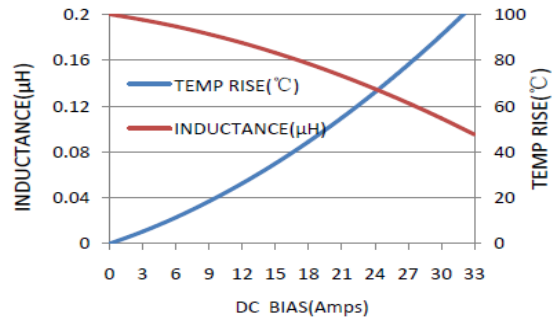


**MCMB-0530-R33MT**

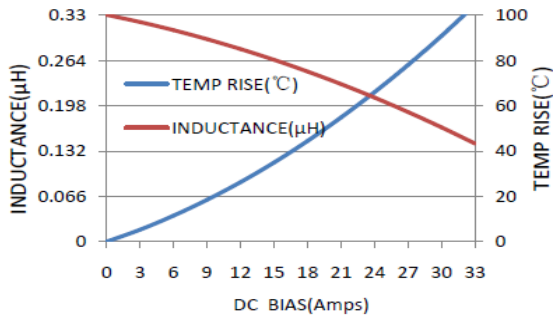


**MCMB-0530-R47MT**

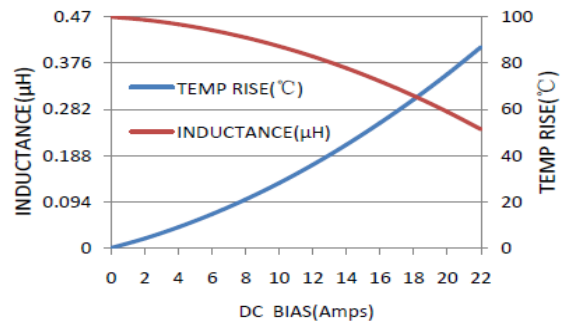


**MCMB-0530-R68MT**

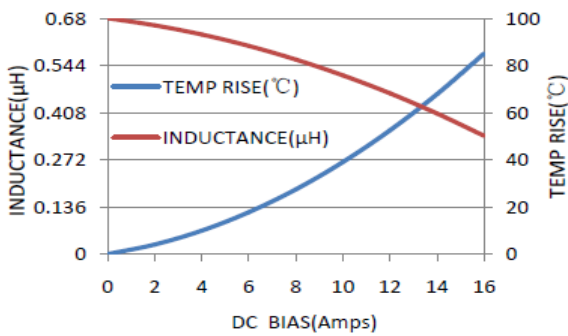


**MCMB-0530-1R0MT**





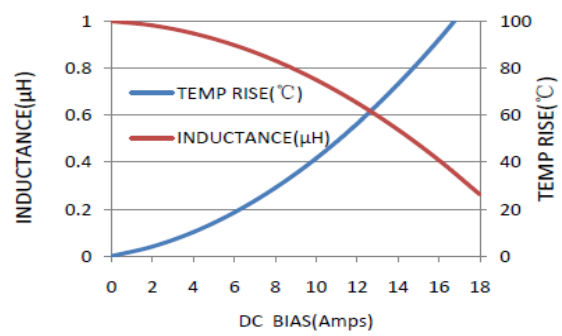


**MCMB-0530-1R2MT**

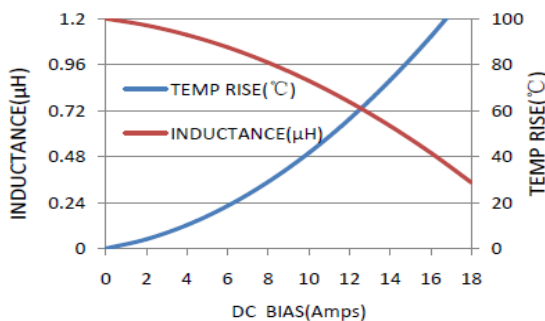

**MCMB-0530-1R5MT**

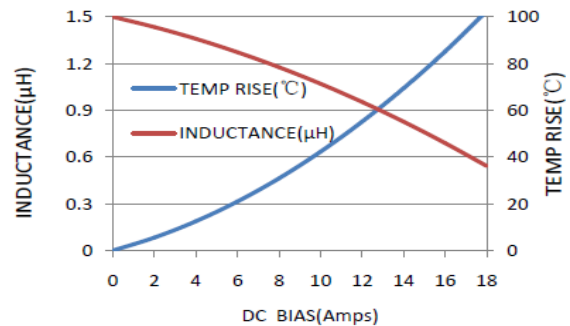


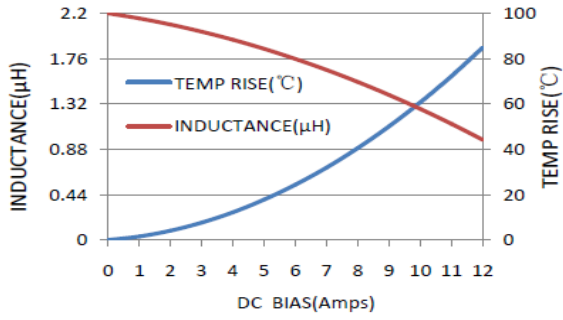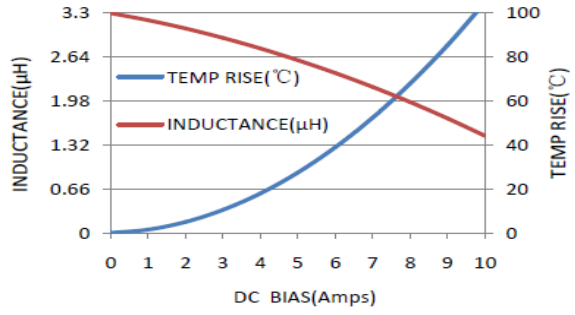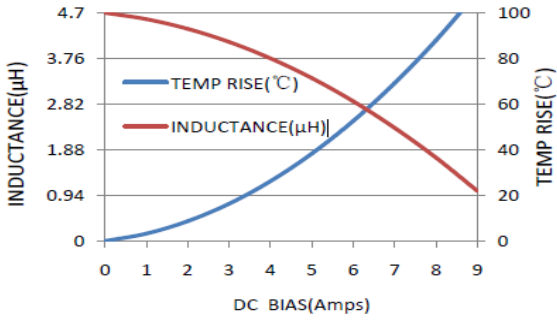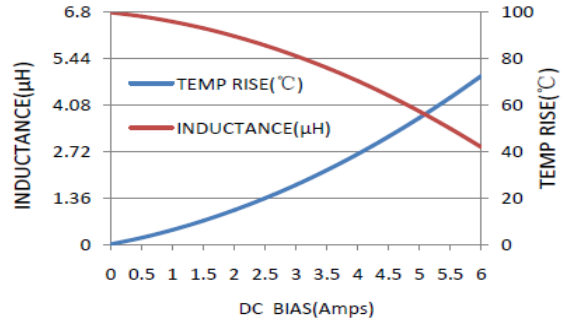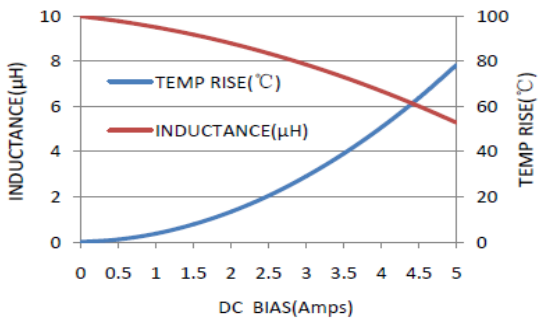**MCMB-0530-2R2MT**

**MCMB-0530-3R3MT**

**MCMB-0530-4R7MT**

**MCMB-0530-6R8MT**

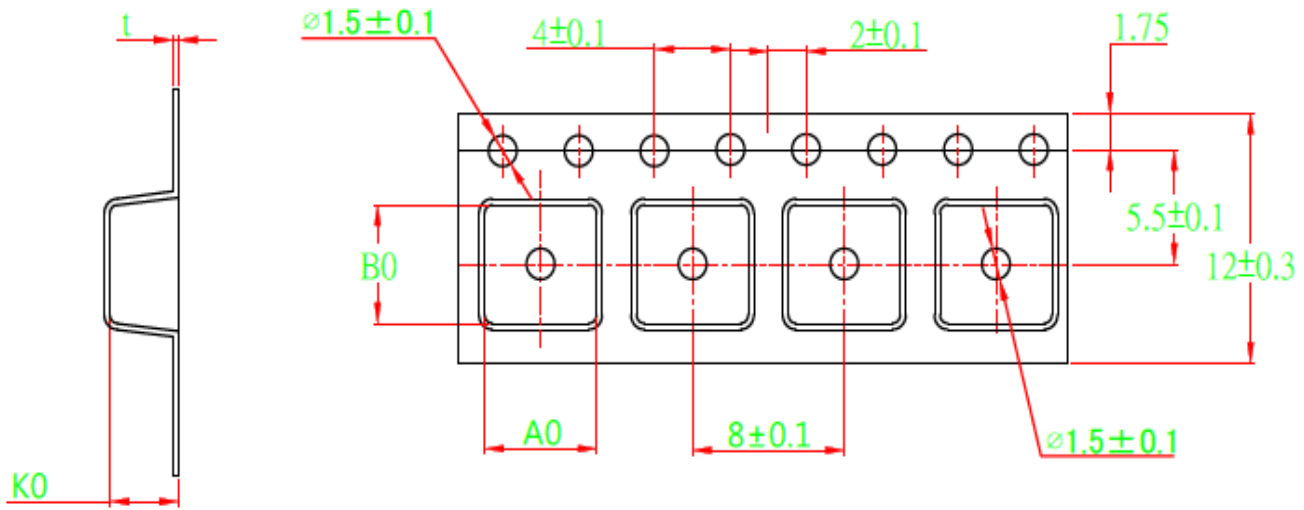**MCMB-0530-100MT**


## Reliability and Test Condition


Mechanical Reliability		
Item	Specification and Requirement	Test Method
Solderability	The surface of terminal immersed shall be minimum of 95% covered with a new coating of solder	Solder heat proof: 1. Preheating: $160 \pm 10$ °C 2. Retention time: $245 \pm 5$ °C for $2 \pm 0.5$ seconds
Vibration	Inductance change: Within $\pm 10\%$ Without mechanical damage such as break	1. Vibration frequency: (10 Hz to 55 Hz to 10Hz) in 60 seconds as a period 2. Vibration time: Period cycled for 2 hours in each of 3 mutual perpendicular directions. 3. Amplitude: 1.5 mm max.
Shock	Inductance change: Within $\pm 10\%$ Without mechanical damage such as break	1. Peak value: 100 G 2. Duration of pulse: 11ms 3. 3 times in each positive and negative direction of 3 mutual perpendicular directions
Endurance Reliability		
Item	Specification and Requirement	Test Method
Thermal Shock	Inductance change: Within $\pm 10\%$ Without distinct damage in appearance	1. Repeat 100 cycles as follow: ( $-55 \pm 2$ °C; $30 \pm 3$ min) →(Room temp., 5 min) → ( $+125 \pm 2$ °C, $30 \pm 3$ min) → (Room temp., 5 min) 2. Recovery: $48 + 4 / -0$ hours of recovery under the standard condition after the test.
High Temperature Resistance	Inductance change: Within $\pm 10\%$ Without distinct damage in appearance	1. Environment condition: $85 \pm 2$ °C Applied Current: Rated current 2. Duration: $1000 + 4 / -0$ hours
Humidity Resistance	Inductance change: Within $\pm 10\%$ Without distinct damage in appearance	1. Environment condition: $60 \pm 2$ °C Humidity: 90–95% Applied Current: Rated current 2. Duration: $1000 + 4 / -0$ hours
Low Temperature Store	Inductance change: Within $\pm 10\%$ Without distinct damage in appearance	Store temperature: $-55 \pm 2$ °C, $1000 + 4 / -0$ hours
High Temperature Store	Inductance change: Within $\pm 10\%$ Without distinct damage in appearance	Store temperature: $+125 \pm 2$ °C, $1000 + 4 / -0$ hours

### Tape Packaging Dimensions



A0	B0	K0	t
$5.7 \pm 0.10$	$5.9 \pm 0.10$	$3.3 \pm 0.15$	$0.35 \pm 0.05$

### Reel Dimensions

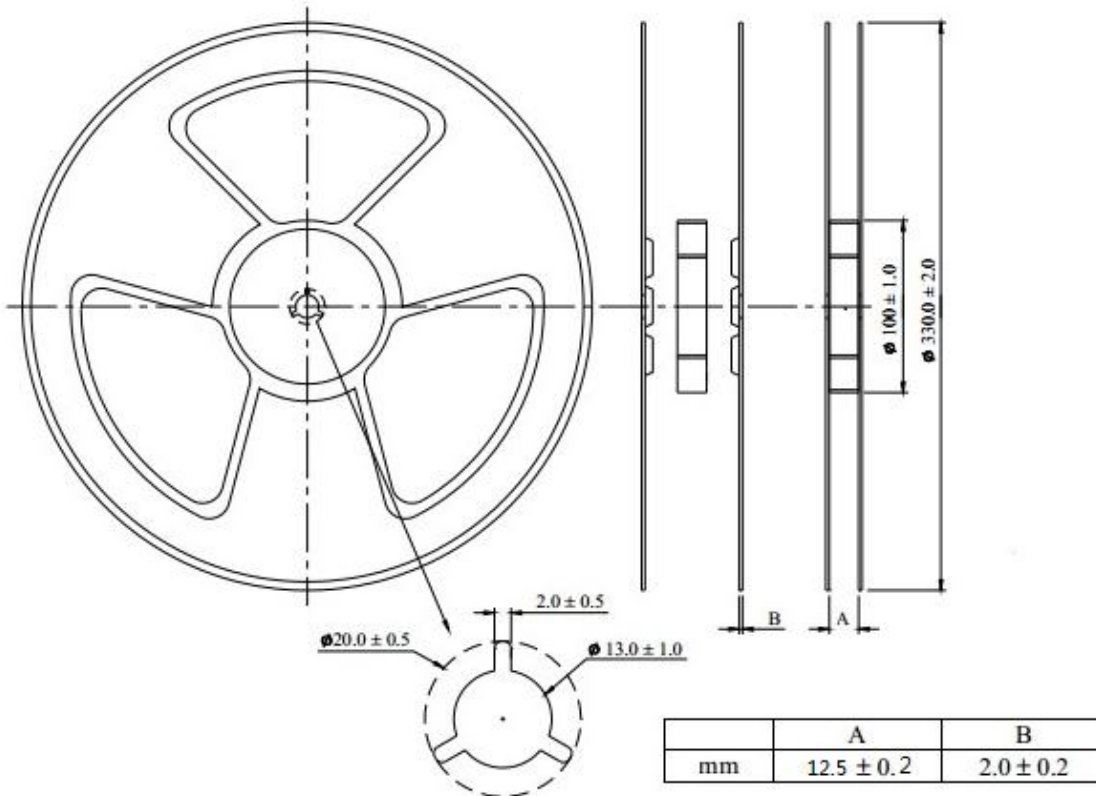

Packing Quantity: 2000pcs/Reel

## Recommended Soldering Technologies

### (1) Re-flowing Profile

Preheat condition: 150 ~200°C/60~180sec.


Allowed time above 217°C: 80~120sec.

Max temp: 260°C

Max time at max temp: 10 sec.

Solder paste: Sn/3.0Ag/0.5Cu

Allowed Reflow time: 2x max

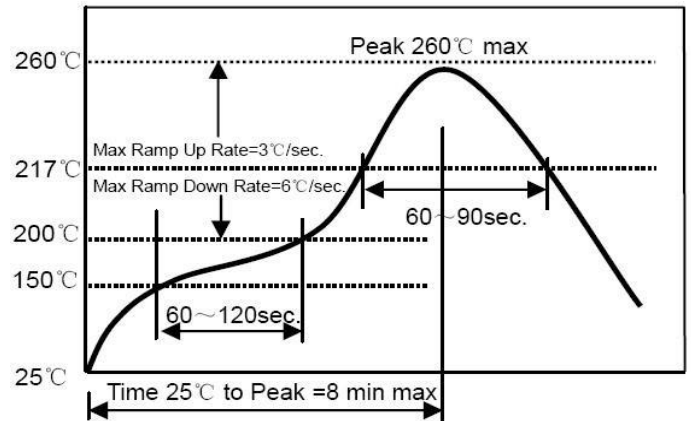

### (2) Iron Soldering Profile

Iron soldering power: Max.

30W Pre-heating: 150°C/60sec.

Soldering time: 3sec. Max.

Solder paste: Sn/3.0Ag/0.5Cu

Max.1 times for iron soldering

