


CGS | CGS 3560

TE Internal #: 2-2176408-4 22K Ω, Thick Metal Film, Power Resistor, 5 %, 2 Termination, Taped & Reeled, 6 W, ±100 ppm/°C, Solder, Height .043 in [1.1 mm], CGS 3560

View on TE.com >



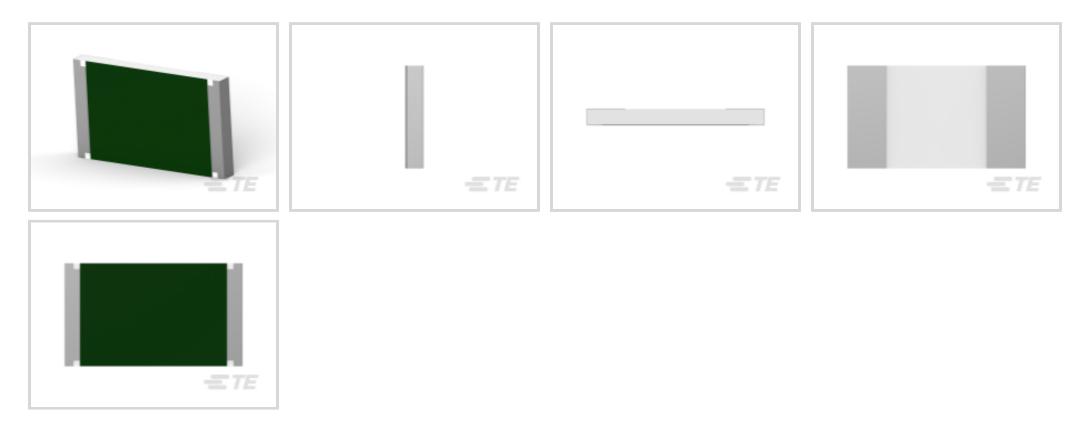

Resistor Type: Power Resistor

Number of Terminations: 2

Packaging Method: Taped & Reeled

Passive Component Tolerance: 5%

Element Type: Thick Metal Film

Features

connectivity

Product Type Features

Resistor Type	Power Resistor
Element Type	Thick Metal Film
Configuration Features	
Number of Resistors	1
Electrical Characteristics	
Operating Voltage	300 V
Passive Component Tolerance	5 %
Resistance Class	$1k\Omega - 1M\Omega$
Resistance Value	22Κ Ω
Power Rating	6 W
Termination Features	
Number of Terminations	2
Surface Mount Resistor Termination Type	Solder

356022KJT

22K Ω, Thick Metal Film, Power Resistor, 5 %, 2 Termination, Taped & Reeled, 6 W, ±100 ppm/°C, Solder, Height .043 in [1.1 mm], CGS 3560



Dimensions

Product Height	1.1 mm[.043 in]
Product Length	11.6 mm[.457 in]
Product Width	6.85 mm[.27 in]
Usage Conditions	
Temperature Coefficient	±100 ppm/°C
Packaging Features	
Packaging Method	Taped & Reeled
Product Compliance	
en la la sur sur la sur en estado	

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC

Halogen Content

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Reflow solder capable to 260°C

Solder Process Capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

356022KJT

22K Ω, Thick Metal Film, Power Resistor, 5 %, 2 Termination, Taped & Reeled, 6 W, ±100 ppm/°C, Solder, Height .043 in [1.1 mm], CGS 3560








Also in the Series CGS 3560



Surface Mount Resistors(254)



Customers Also Bought

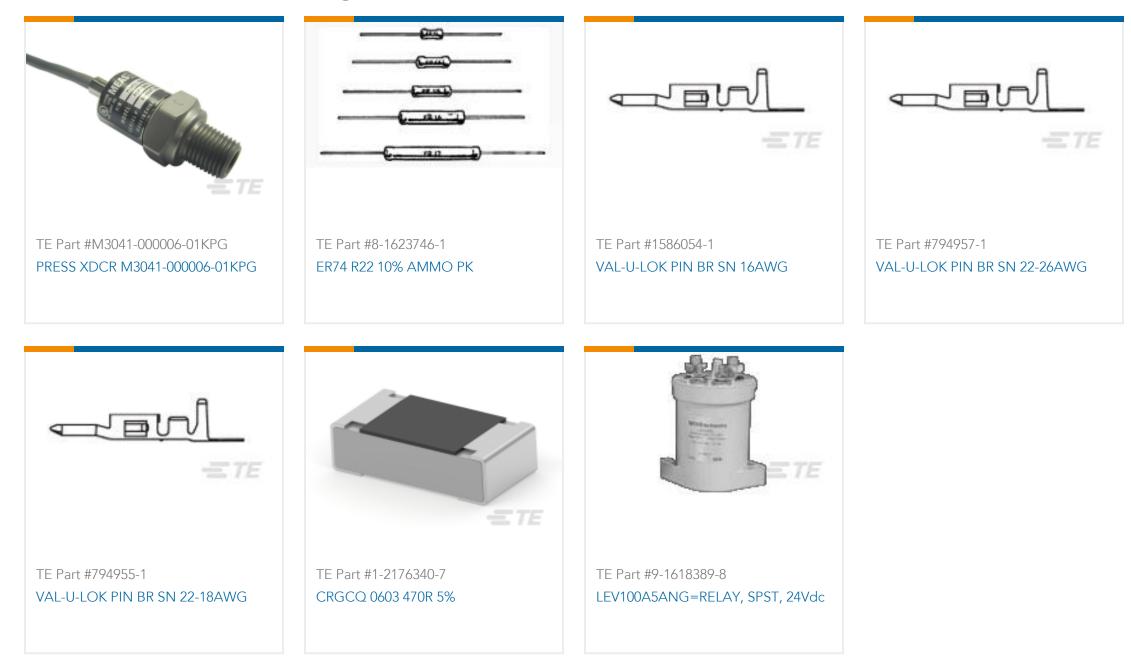

356022KJT

22K Ω, Thick Metal Film, Power Resistor, 5 %, 2 Termination, Taped & Reeled, 6 W, ±100 ppm/°C, Solder, Height .043 in [1.1 mm], CGS 3560



Documents

Product Drawings 3560 22K 5%

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2-2176408-4_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2-2176408-4_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2-2176408-4_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages SMD HIGH POWER RESISTORS - TYPE 3660 SERIES

English