
ב ס	יח וד ווי		0	σ		
Z'	ØS					
	I		LAY	OUT SHOWN AS EXAMPLE		
	Keying Shown as example					
CHARACTERISTICS	Connector di Dim	mension Nominal				
-Standard : Based on MIL-DTL-38999 Series III -Shell Material : Composite -Shell Plating : Olive drab Cadmium -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8μm minimum	ØS Z' VV THREAD	32.5 Max 31.5 Max M22x1-6g	due to a use the Specifications	not be liable for any non-conformity of the Products which does not con issued by either of the Parties or by onal recommendation, technical no Country Jurisdi FR	nply with y a third party	
-Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories			F	PN: 8D515J15AA		
-Temperature Range : -65°C to +175°C		Α	19-10-2016 First Release			
-Salt Spray : 2000 hours - Mass : 22.2 g ± 10%		ISS Desig	DATE Latest modification gned By: Date:	on - by	CUSTOMER DRAWING	DD N°
			TITLE	Composite Plug 8) series	
BASIC SERIES: 8D 5 - 15 J SHELL TYPE : Plug with RFI Shielding	15 A A			General linear Tolerances: ±	NPRDS / PROJECT 859	
CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 15				.SOURIAU.COM	This document is the property of SOURIAU it must not be reproduced or communicated without permission	
PLATING : J = Olive drab Cadmium		CONTACT LAYOUT : 15-15	RMAT A3	SOURIAU DRG N°	SH	IEET
1				8D515J15AA-C	1	l/2

r	т	۵	٣	m	D	0	
		Contact Layout					
4		$ \begin{array}{c} \begin{pmatrix} & \downarrow \oplus \\ & \bigoplus \\ \oplus \\ & \bigoplus \\ & $					
		Y-axis (mm) Contact position ID (mm) X-axis (mm) Y-axis (mm) + 225 (5.72) J -244 (6.20) +014 (0.36) + 140 (2.56) K -224 (6.20) +014 (0.36) + 140 (3.56) L -100 (2.24) +225 (5.72) -113 (2.87) M +000 (0.0) +140 (3.56) -229 (5.31) N +110 (2.79) +040 (1.02) -246 (6.22) P +000 (0.0) -077 (1.96) -209 (5.31) R -110 (2.79) +040 (1.02) -,113 (2.87)	1				
ω	Shell Arrangement Num size no. con 15 -15 .	nber of Size Service Contact Supersedes tacts rating location 1 1 16 P MS20052-15 14 20 I All other MS20052-15					
	ŀ						
						SOURIAU shall not be liab due to a use of the Pro the Specifications issued by (professional recor	oducts w / either c mmenda
N						PN: 8[Count FR 0515
					A 19-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:	
					SCALE	Genera	Compo al linear
_					NA SOURIA		rances: <u>+</u> RIAU.(
				_	FORMAT A3	SOU 8D	RIAL 515J
	Н	G	F	E	D	C	

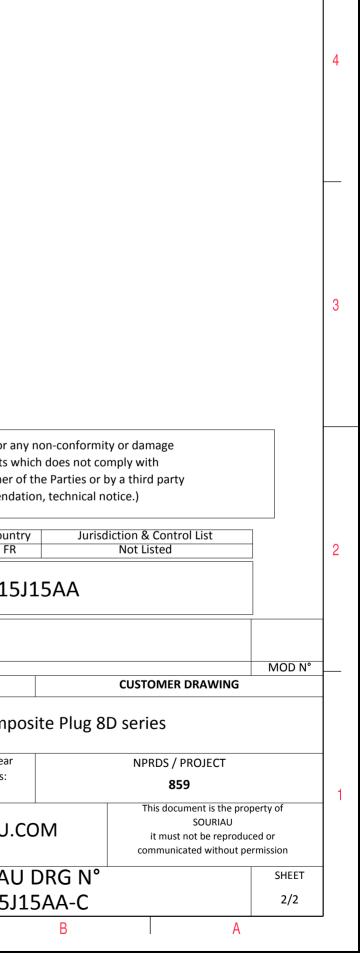

ω