
Ω	m m		0	σ	Þ		
Z' ØS							
			LAYOUT SHO	WN AS EXAMPLE			
	Keying Shown as example						
CHARACTERISTICS	Connector dimension	1					
-Standard : Based on MIL-DTL-38999 Series III	DimNominalØS29.4 Max]					
-Shell Material : Composite -Shell Plating : Nickel -Insulator : Thermoplastic -Contacts : Copper Alloy	Z' 31.5 Max VV THREAD M18x1-6g		SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)				
-Seals & Grommet : Silicon Elastomer					& Control List		
-Contact Plating : Gold over copper Alloy 0.8µm minimum				FR Not	Listed		
-Durability : 500 Mating cycles -Delivered without Souriau contacts			PN: 8D513M98PNL				
-Temperature Range : -65°C to +200°C							
-Salt Spray : 2000 hours			2016 First Release				
Mass : 15.8 g ± 10%		ISS DAT Designed By:	TE Latest modification - by Date:	cus	MOE TOMER DRAWING) N°	
		TITLE	Composite Plug 8D series				
BASIC SERIES: 8D 5 - 13 M 9	98 P N L	SCALE	Genera	l linear N	PRDS / PROJECT		
SHELL TYPE : Plug with RFI Shielding	Delivered W	/O Contacts NA			859		
CONTACT TYPE : Standard Crimp Contact			SOURIAU This document is the property of SOURIAU it must not be reproduced or				
SHELL SIZE : 13	CONTACT TYPE : PIN(5				communicated without permission		
PLATING : M = Nickel	CONTACT LAY	OUT : 13-98 FORMAT A3		RIAU DRG N° 13M98PNL-C	SHE		
			V1151	. ~			

_	I	۵	н г	m	D	0
		Contact Layout				
4		$x_{1} \begin{pmatrix} \bullet & \bullet \\ \bullet \\$				
	Conti position A B B C C D D E G G G H H J J K	n ID (mm) (mm) + 000 (0.00) + .195 (4.95) + .125 (3.18) + .150 (3.81) + .123 (4.90) + .030 (0.76) + .104 (4.17) 105 (2.67) + .000 (0.00) 135 (3.43) 164 (4.17) 105 (2.67) 193 (4.90) + .030 (0.76) 193 (4.90) + .030 (0.76) 193 (4.90) + .030 (0.76) + .193 (4.17) 105 (2.67) 193 (4.90) + .030 (0.76) + .193 (4.18) + .150 (3.81) + .065 (1.65) 015 (0.38)				
ယ	Shell Arrangement N size no. c 13 -98	Number of contacts Size rating Contact location Supersedes 10 20 I All MS20051-98				
						SOURIAU shall not be liable for an due to a use of the Products wi the Specifications issued by either o (professional recommenda
S						Count FR
						PN: 8D513N
_					ISS DATE Designed By: TITLE	Latest modification - by Date: Compo
→					SCALE	General linear Tolerances:
					SOURIA	U WWW.SOURIAU.C
					FORMAT A3	SOURIAU 8D513M9
	Н	G	F	E	D	C

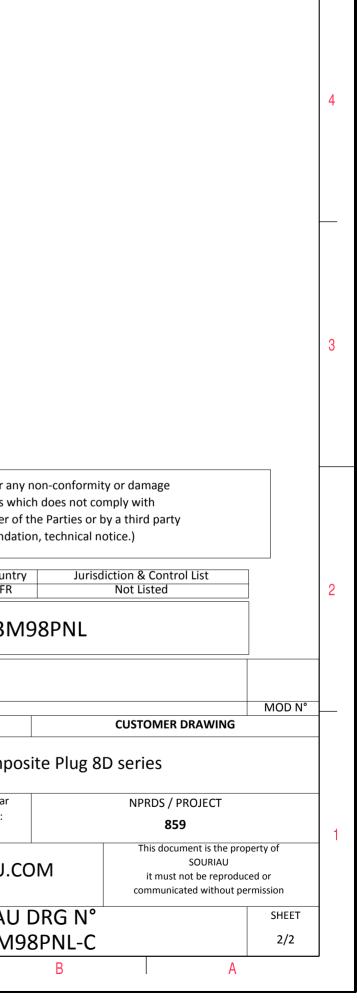

 \triangleright

σ