

T	Ω (	п	m	<u>о</u>



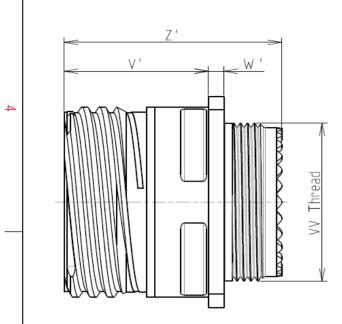



LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 13

PLATING : M = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

 $\sim$ 

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Composite : Nickel -Shell Plating -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer : Gold over copper Alloy  $0.8 \mu m$  minimum -Contact Plating -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories : -65°C to +200°C -Temperature Range : 2000 hours -Salt Spray -Mass : 20.1 g ± 10%

8D 0

G

13

Μ

В

F


26

D

Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	23.01
R2	20.62
S	28.6±0.3
V'	19.5+1.4/-0
W'	2.1/3.65
Ζ'	32 Max
/V THREAD	M18x1-6g

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

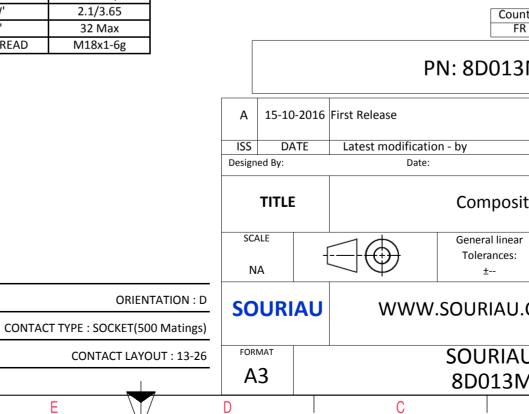

Β		A				
				4		
AS EXAMPLE				3		
any non-conformit which does not co or of the Parties or b ndation, technical no untry Jurisd R 3M26BD	mply with by a third part			2		
	CUSTOMER	DRAWING	MOD N°			
ite Receptacle 8D series						
ar :	NPRDS / PROJECT 859					
J.COM	This document is the property of					
U DRG N°			SHEET			
M26BD-C		A	1/2	J		
-	•					

_	Ŧ	۵	г	m		0
		Contact Layout				Panel Cutou
4		26			م تح	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
_	<b></b>	2#12 6#22D	I		¥	
ω	Ctc A B C D E F 1 2	13-26   X Y   0 3.47   2.47 4.34   2.47 -4.34   0 -3.47   -2.47 -4.34   -2.47 4.34   3.25 0   -3.25 0				Dim ØA ØA R1 ØT
	<b> </b> -					SOURIAU shall not be liable for any
						due to a use of the Products wh the Specifications issued by either of (professional recommendat
N						Countr FR
						PN: 8D013N
					A 15-10-20 ISS DATE	116 First Release Latest modification - by
					Designed By: TITLE	Date: Composite
-					SCALE	General linear Tolerances:
					SOURIA	
					FORMAT A3	SOURIAU 8D013M
L	Н	G	F	E	D	С

