Alcoswitch | Alcoswitch PB6

TE Internal #: 2329386-4 Push Button Switches, Single Pole - Single Throw Configuration (Pole-Throw), Switch, Single Actuator, Flush Actuator Profile, Threaded, Alcoswitch PB6

View on TE.com >

Switches > Push Button Switches



Configuration (Pole-Throw): Single Pole - Single Throw Push Button Switch Product Type: Switch Number of Actuators: Single Actuator Profile: Flush

Bushing Style: Threaded

Features



Product Type Features

Switch Connection Type	Long Leads		
Push Button Switch Product Type	Switch		
Illuminated	Without		
Actuator Style	Round		
Configuration Features			
Configuration (Pole-Throw)	Single Pole - Single Throw		
Number of Actuators	Single		
Snap Action	Without		
Support Bracket	Without		
Switch Feedback Type	Auditory		
Operating Function	Momentary		
Electrical Characteristics			
Operating Voltage Range	32 VAC, 125 VAC		
Body Features			

Push Button Switches, Single Pole - Single Throw Configuration (Pole-Throw), Switch, Single Actuator, Flush Actuator Profile, Threaded, Alcoswitch PB6



Actuator Force	306 – 612 g[10.8 – 21.6 oz]	
Case Material	Diallyl Phthalate (DAP)	
Actuator Material	Polyamide	
Product Orientation	Vertical	
Actuator Profile	Flush	
Bushing Style	Threaded	
Bushing Thread Size	M12 x .75	
Actuator Color	Green	
Contact Features		
Contact Current Rating	.12 A	
Switch Contact Plating Material	Gold over Silver	
Housing Features		
Process Sealed	Yes	
Industry Standards		
IP Rating	IP68	
Packaging Features		
Packaging Method	Loose Piece	

Product Compliance

For compliance documentation, visit the product page on TE.com>

	EU RoHS Directive 2011/65/EU	Compliant with Exemptions
	EU ELV Directive 2000/53/EC	Compliant with Exemptions
	China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
	EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) SVHC > Threshold: Pb (4% in Component Part) Aticle Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
	Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
	Solder Process Capability	Not reviewed for solder process capability

Push Button Switches, Single Pole - Single Throw Configuration (Pole-Throw), Switch, Single Actuator, Flush Actuator Profile, Threaded, Alcoswitch PB6



Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts






Also in the Series | Alcoswitch PB6



Customers Also Bought

Push Button Switches, Single Pole - Single Throw Configuration (Pole-Throw), Switch, Single Actuator, Flush Actuator Profile, Threaded, Alcoswitch PB6



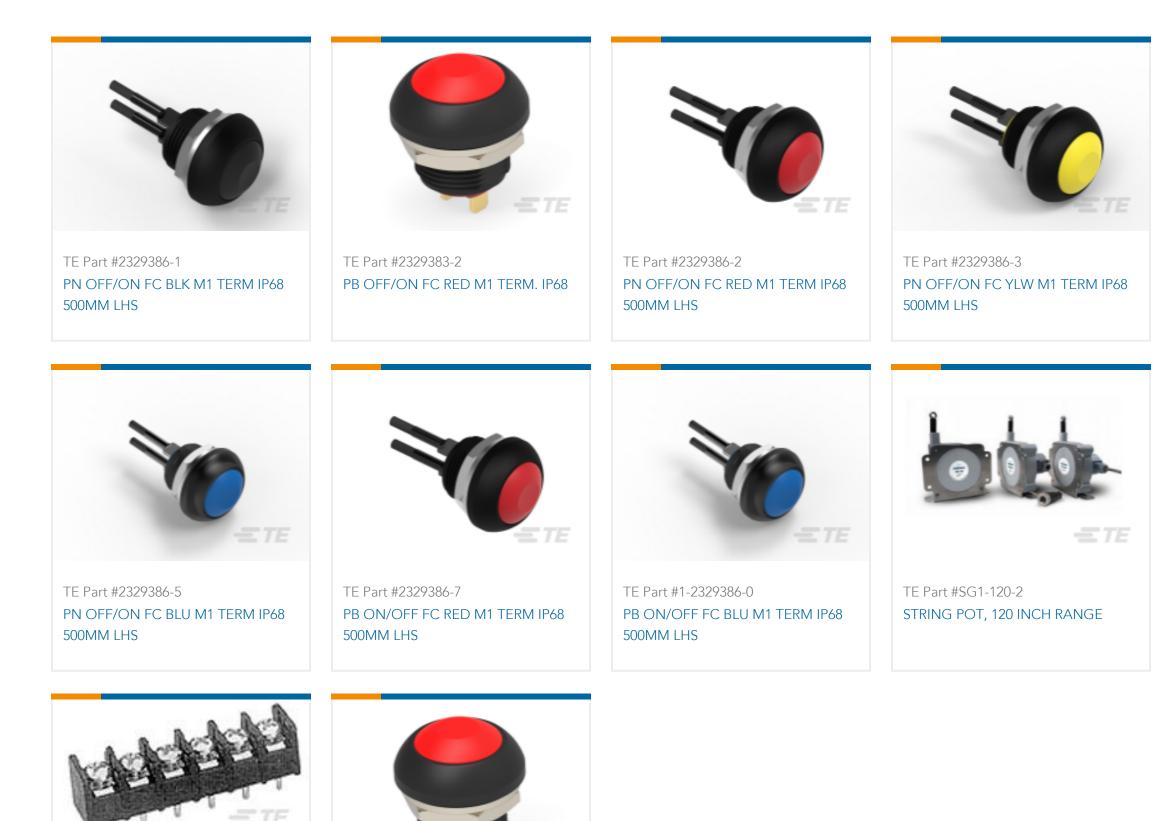

TE Part #6-1546119-7 3WWV-04-008



PB ON/OFF FC RED M1 TERM IP68

Documents

Product Drawings PN OFF/ON FC GRE M1 TERM IP68 500MM LHS

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2329386-4_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2329386-4_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2329386-4_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use

Datasheets & Catalog Pages

C For support call+1 800 522 6752

Push Button Switches, Single Pole - Single Throw Configuration (Pole-Throw), Switch, Single Actuator, Flush Actuator Profile, Threaded, Alcoswitch PB6



IP68 Sub Mini PB Data Sheet

English