

# Power Inductor

APCF Series - ISO9001 | ISO14001 | IATF16949




- Power Circuit
- Shield
- Wire Wound
- Ferrite

## Part Numbering


A	PCF	00	070745	1R0	M	00
Grade	Series Name	Control Code	Dimensions Code (mm)	Inductance (uH)	Tolerance	Internal Code
			070745 7x7x4.5	1R0 1	M ±20%	
			131375 12.5x12.5x7.5	100 10	T ±30%	
				101 100		

## APCF00070745 Type

### ■ Dimensions

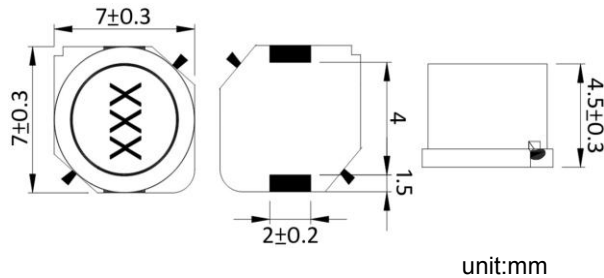

### ■ Recommended Land Pattern



### ■ Electrical Characteristics


Part No.	Inductance (uH)	Test Freq.	RDC (Ω)±20%	Isat (A)Max	Irms (A)Typ	Tolerance (±%)	Marking
APCF000707451R0□00	1.0	100kHz,0.5V	0.011	4.5	4.5	20,30	1R0
APCF000707452R2□00	2.2	100kHz,0.5V	0.015	3.4	3.3	20,30	2R2
APCF000707453R3□00	3.3	100kHz,0.5V	0.02	2.5	2.3	20,30	3R3
APCF000707454R7□00	4.7	100kHz,0.5V	0.03	2	2.1	20,30	4R7
APCF000707456R8□00	6.8	100kHz,0.5V	0.039	1.7	1.74	20,30	6R8
APCF00070745100□00	10	100kHz,0.5V	0.036	1.3	1.78	20,30	100
APCF00070745150□00	15	100kHz,0.5V	0.052	1.1	1.53	20,30	150
APCF00070745220□00	22	100kHz,0.5V	0.061	0.9	1.34	20,30	220
APCF00070745330□00	33	100kHz,0.5V	0.096	0.82	1.09	20,30	330
APCF00070745470□00	47	100kHz,0.5V	0.125	0.75	0.92	20,30	470
APCF00070745680□00	68	100kHz,0.5V	0.175	0.6	0.77	20,30	680
APCF00070745101□00	100	100kHz,0.5V	0.25	0.5	0.65	10,20	101
APCF00070745151□00	150	100kHz,0.5V	0.34	0.4	0.55	10,20	151
APCF00070745221□00	220	100kHz,0.5V	0.52	0.33	0.45	10,20	221
APCF00070745331□00	330	100kHz,0.5V	0.74	0.25	0.37	10,20	331
APCF00070745471□00	470	100kHz,0.5V	1.05	0.22	0.31	10,20	471
APCF00070745681□00	680	100kHz,0.5V	1.48	0.2	0.27	10,20	681
APCF00070745102□00	1000	100kHz,0.5V	2.28	0.14	0.25	10,20	102

**Note: When ordering, please specify tolerance code. Tolerance: K=±10% / M=±20% / T=±30%**

1. Operating temperature range - 40°C ~ 125°C(Including self - temperature rise)
2. Isat for Inductance drop 15% from its value without current
3. Iirms for a 25°C temprature rise from 25°C ambient with current
4. Rated DC Current: The less value which is Isat or Iirms
5. Measure Equipment:
  - L: HP4284A PRECISION LCR METER (or equivalent)
  - RDC: CHROMA MODEL 16502 MILLIOHMMETER (or equivalent)
  - Isat:WK3255BQ+ WK3265B (or equivalent)
  - Iirms: WK3255BQ+ WK3265B (or equivalent)


## APCF00131375 Type

### ■ Dimensions

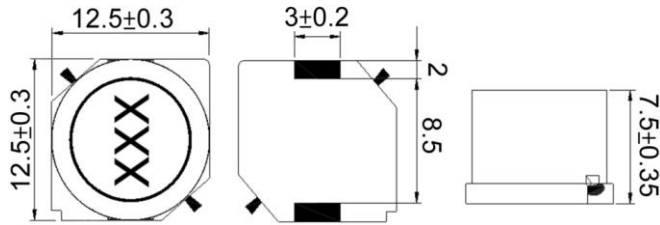

unit:mm

### ■ Recommended Land Pattern



unit:mm

### ■ Electrical Characteristics

Part No.	Inductance (uH)	Test Freq.	RDC (Ω)±20%	Isat (A)Max	Irms (A)Typ	Tolerance (±%)	Marking
APCF001313751R2□00	1.2	100kHz,0.5V	0.0069	13	8.2	30	1R2
APCF001313752R7□00	2.7	100kHz,0.5V	0.0094	10	7	30	2R7
APCF001313753R9□00	3.9	100kHz,0.5V	0.0104	9	6.7	30	3R9
APCF001313755R6□00	5.6	100kHz,0.5V	0.0116	7.8	6.3	30	5R6
APCF001313756R8□00	6.8	100kHz,0.5V	0.0131	7.2	5.9	30	6R8
APCF00131375100□00	10	100kHz,0.5V	0.0156	5.5	5.4	20,30	100
APCF00131375150□00	15	100kHz,0.5V	0.0184	4.7	5	20,30	150
APCF00131375220□00	22	100kHz,0.5V	0.0263	4	4	20,30	220
APCF00131375330□00	33	100kHz,0.5V	0.0395	3.2	3.4	20,30	330
APCF00131375470□00	47	100kHz,0.5V	0.0528	2.7	3	20,30	470
APCF00131375680□00	68	100kHz,0.5V	0.0778	2	2.4	20,30	680
APCF00131375101□00	100	100kHz,0.5V	0.125	1.9	1.9	20,30	101
APCF00131375151□00	150	100kHz,0.5V	0.175	1.5	1.6	20,30	151
APCF00131375221□00	220	100kHz,0.5V	0.258	1.3	1.3	20,30	221

**Note: When ordering, please specify tolerance code. Tolerance: M=±20% / T=±30%**

1. Operating temperature range - 40°C ~ 125°C(Including self - temperature rise)
2. Isat for Inductance drop 10% from its value without current
3. Irms for a 40°C temprature rise from 25°C ambient with current
4. Rated DC Current: The less value which is Isat or Irms
5. Measure Equipment:

L: HP4284A PRECISION LCR METER (or equivalent)


RDC: CHROMA MODEL 16502 MILLIOHMMETER (or equivalent)

Isat:WK3255BQ+ WK3265B (or equivalent)


Irms: WK3255BQ+ WK3265B (or equivalent)

## ■ Packaging

### Tape Dimensions

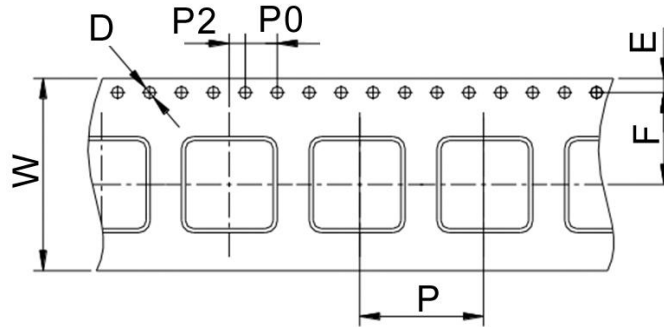

### Reel Dimensions

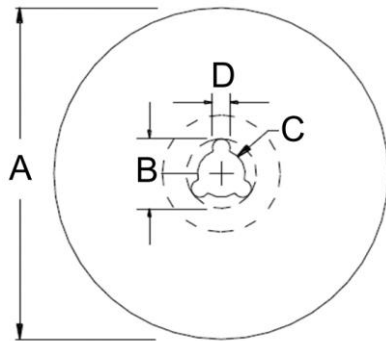

### Dimensions in mm

TYPE	Tape Dimensions							Reel Dimensions				Quantity PCS / REEL
	W	D	E	F	P	P0	P2	A	B	C	D	
APCF00070745	16	1.5	1.75	7.5	12	4	2	330	20	13	2	1000
APCF00131375	24	1.5	1.75	11.5	16	4	2	330	20	13	2	500

### For More Information:

Americas - [prodinfo\\_power\\_americas@yageo.com](mailto:prodinfo_power_americas@yageo.com) | Europe - [prodinfo\\_power\\_emea@yageo.com](mailto:prodinfo_power_emea@yageo.com) | Asia - [prodinfo\\_power\\_asia@yageo.com](mailto:prodinfo_power_asia@yageo.com)

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2022. Pulse Electronics, Inc. All rights reserved.