


Operation: SMT/3.5&插件三段式 4PIN 音頻插座



LTEM NO.: PJ-320D

(L14.2×W6.0×H5.0mm 3.5-PHONE-JACK)

PHONE-JACK



Technical parameter

PROJECT	LEVEL	A[better product]		B[average product]	
Electrical Properties	Contact Rating	50mA, 24V DC			
	Initial Contact Resistance	30mΩ max.		50mΩ max.	
	Insulation Resistance	100MΩ min.500V DC	Skey/PD: 100MΩ min.300V DC		
	Withstand Voltage	500V AC for 1 minute	350 V AC for 1 minut		
Durable Performance	There No Load	6,000 Cycles		5,000 Cycles	
	Rated Load	5,000 Cycles		4,000 Cycles	
Storage temp.		-35℃~+75℃(Operating Temp:)			

表面貼裝 SMT




側向導入 LATERAL

精密部品 NICETY

可靠 STABILIZE


適合環保 RoHS

Unit:mm

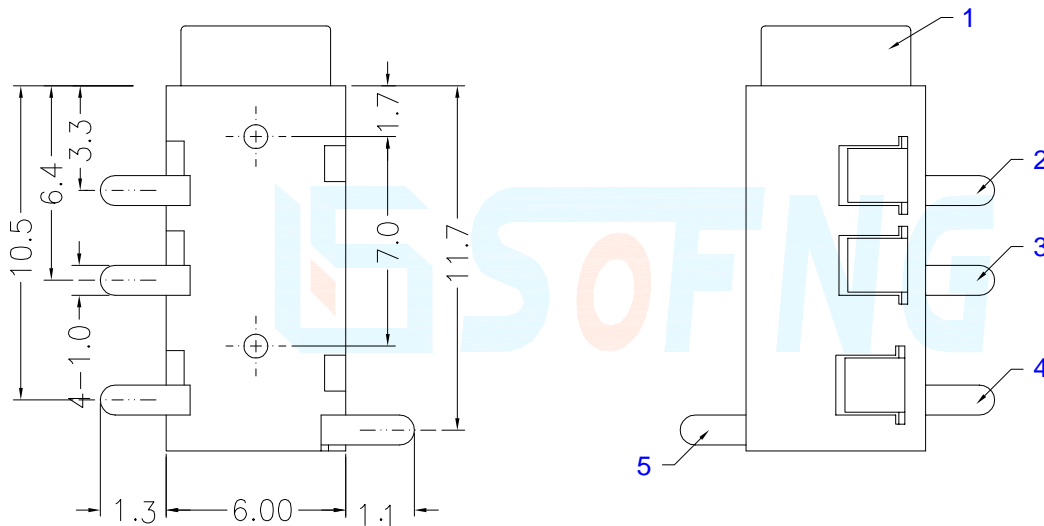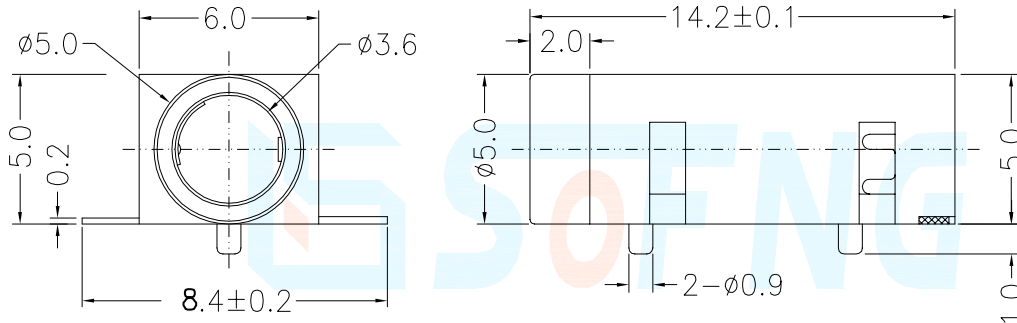

4POLE PLUG

Operating Force	Inward	5.0~8.0N. (1N.=100gram-force)	Solder-ability (Max.)	
	Exiting	5.0~8.0N. (1N.=100gram-force)	245°C	Manual : 350°C, 3sec.

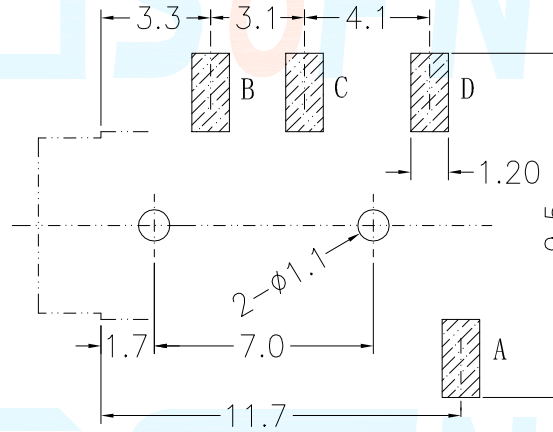



DECIMALS	ANGLES
.X : ±0.20	X.° : ±1.5°
.XX : ±0.10	X.X° : ±1.0°
.XXX : ±0.05	.XXX° : ±0.5°

Pin Definition



Material declaration

No.	NAME	Type	Description
①	基座	1	PA9T/PA6T (Black)耐热塑胶
②	接觸端子#1	1	C5191R-H (t=0.20mm)磷铜[银基]
③	接觸端子#2	1	C5191R-H (t=0.20mm)磷铜[银基]
④	接觸端子#3	1	C5191R-H (t=0.20mm)磷铜[银基]
⑤	接觸端子#4	1	C5191R-H (t=0.20mm)磷铜[银基]

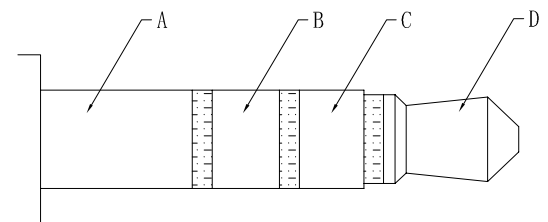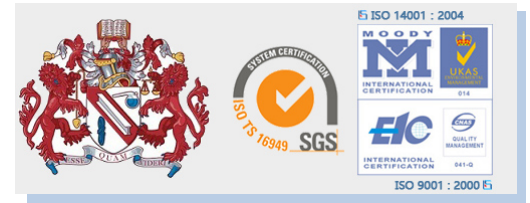

● ∅3.5 MATE PLUG

本品不屬於危害性廢棄物,須丟棄時可以委託回收商予以回收再生處理。
Products do not belong to •

注記 NOTICE

1. 碩方公司擁有最終解釋權; The company reserves the right of final interpretation;
2. 文件禁止外洩、轉載; Leaked and reproduced prohibited;
3. 未經授權修改無效。Modify is invalid.

運送時本產品不要直接與水、酸鹼性化學物質接觸,或放置於含有以上氣體環境中,並且需要注意會有滑落、側翻的危險發生; 運輸過程中不能有碰撞或者擠壓,須保證溫度與濕度適中 [常溫 25°C, 濕度在 50°C 以內], 不可導致材料變形或氧化。