

RECOMMENDED PCB LAYOUT FOR SSM-1XX-XXX-XX-XX-XX-XX

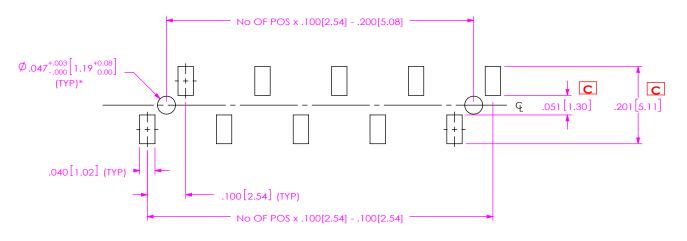


FIGURE 3 -SV

*ONLY ONE Ø.047 HOLE TO APPEAR ON 2 POSITION WITH -LC OPTION

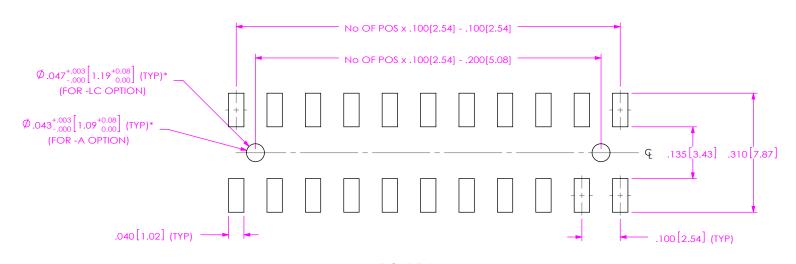


FIGURE 4 -DV

*ONLY ONE HOLE TO APPEAR ON 2 POSITION WITH -LC OR -A OPTION

CONFIDENTIAL AND PROPRIETARY TO SAMTEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC, INC.



REVISION C

RECOMMENDED PCB LAYOUT FOR SSM-1XX-XXX-XX-XX-XX-XX

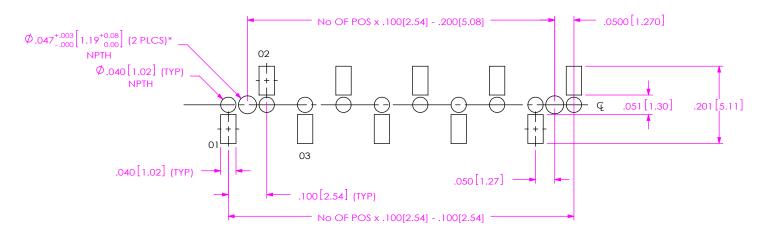


FIGURE 5 -SV-BE

*ONLY ONE Ø.047 HOLE TO APPEAR ON 2 POSITION WITH -LC OPTION

*ONLY ONE HOLE TO APPEAR ON 2 POSITION WITH -LC OR -A OPTION

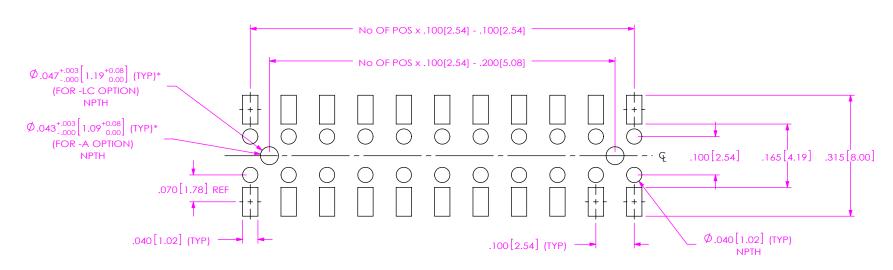


FIGURE 6 -DV-BE C

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMITEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMITEC. INC.



520 PARK EAST BLVD, NEW ALBANY, IN 47150 PHONE: 812-944-6733 FAX: 812-948-5047 e-Mail info@SAMTEC.com code 55322

SHEET 3 OF 6

revision c	RECOMMENDED STENCIL LAYOUT FOR SSM-1XX-XXX-XX-XX-XX-XX
	SAME AS FIGURE 1 UNLESS NOTED OTHERWISE RECOMMENDED STENCIL THICKNESS .006[.152mm]
	SAME AS FIGURE 2 UNLESS NOTED OTHERWISE RECOMMENDED STENCIL THICKNESS .006[.152mm] RECOMMENDED STENCIL THICKNESS .006[.152mm]

<u>-DH</u>

CONFIDENTIAL AND PROPRIETARY TO SAMTEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC, INC.



520 PARK EAST BLVD, NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail info@SAMTEC.com code 55322
SHEET 4 OF 6

revision c	RECOMMENDED STENCIL LAYOUT FOR SSM-1XX-XXX-XX-XX-XX-XX
	SAME AS FIGURE 3 UNLESS NOTED OTHERWISE RECOMMENDED STENCIL THICKNESS .006[.152mm] -SV
	SAME AS FIGURE 4 UNLESS NOTED OTHERWISE RECOMMENDED STENCIL THICKNESS .006[.152mm] -DV PROPRIETARY NOTE PROPRIETARY NOTE PROPRIETARY NOTE THE DOCUMENT CONTAINS INFORMATION

THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS THAN UPUR TO SHEET THE THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC, INC.



520 PARK EAST BLVD, NEW ALBANY, IN 47150 PHONE: 812-944-6733 FAX: 812-948-5047 e-Mail info@SAMTEC.com code 55322

revision c	RECOMMENDED STENCIL LAYOUT FOR SSM-1XX-XXX-XX-XX-XX-XX
	SAME AS FIGURE 5 UNLESS NOTED OTHERWISE RECOMMENDED STENCIL THICKNESS .006[.152mm] -SV-BE C
	SAME AS FIGURE 6 UNLESS NOTED OTHERWISE RECOMMENDED STENCIL THICKNESS .006[.152mm] -DV-BE C PROPRIETARY NOTE THIS DOCUMENT CONTAINS INFORMATION

THIS DOCUMENT CONTAINS INFORMATION
CONFIDENTIAL AND PROPRIETARY TO
SAMIEC, INC. AND SHALL NOT BE REPRODUCED
OR TRANSFERRED TO OTHER DOCUMENTS OR
DISCLOSED TO OTHER DOCUMENTS OR
DISCLOSED TO OTHER THAN THAT WHICH IT WAS
OBTAINED WITHOUT THE EXPRESSED WRITTEN
CONSENT OF SAMTEC, INC.



520 PARK EAST BLVD, NEW ALBANY, IN 47150 PHONE: 812-944-6733 FAX: 812-948-5047 e-Mail info@SAMTEC.com code 55322 SHEET 6 OF 6