# 

CGS | CGS SBC TE Internal #: 2-1623730-5 6.8K Ω, Wire Wound, Power Resistor, 5 %, 20 x 7 x 8 mm, 2 Termination, Loose Piece - Box, 4 W, ±200 ppm/°C, Copper Termination, Axial-Leaded, CGS SBC

View on TE.com >



Passive Components > Resistors > Through-Hole Resistors > Wirewound Resistor: Vertical Mount



Resistor Type: **Power Resistor** 

Passive Component Dimensions: 20 x 7 x 8 mm

Number of Terminations: 2

Packaging Method: Loose Piece - Box

Passive Component Tolerance: 5%

All Wirewound Resistor: Vertical Mount (166)

# Features

# Product Type Features

Resistor Type

Element Type

Power Resistor

Wire Wound

### **Configuration Features**

Number of Resistors	1
Electrical Characteristics	
Passive Component Tolerance	5 %
Resistance Class	$1k\Omega - 1M\Omega$
Resistance Value	6.8K Ω
Power Rating	4 W
Body Features	
Lead Type	Axial-Leaded
Termination Features	
Number of Terminations	2
Termination Area Base Material	Copper
Dimensions	
Passive Component Dimensions	20 x 7 x 8 mm

**C** For support call+1 800 522 6752

# SBCHE46K8J

6.8K Ω, Wire Wound, Power Resistor, 5 %, 20 x 7 x 8 mm, 2 Termination, Loose Piece -Box, 4 W, ±200 ppm/°C, Copper Termination, Axial-Leaded, CGS SBC



### **Usage Conditions**

Operating Temperature Range

Temperature Coefficient

# Packaging Features

Packaging Method

-55 – 350 °C

±200 ppm/°C

Loose Piece - Box

# **Product Compliance**

### For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Wave solder capable to 265°C

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**


# SBCHE46K8J

6.8K Ω, Wire Wound, Power Resistor, 5 %, 20 x 7 x 8 mm, 2 Termination, Loose Piece -Box, 4 W, ±200 ppm/°C, Copper Termination, Axial-Leaded, CGS SBC





# Also in the Series | CGS SBC

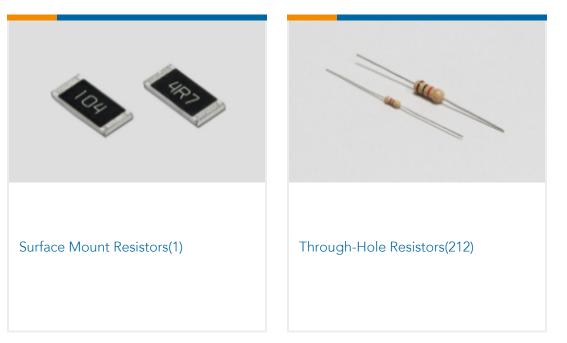

# Customers Also Bought





# SBCHE46K8J

6.8K Ω, Wire Wound, Power Resistor, 5 %, 20 x 7 x 8 mm, 2 Termination, Loose Piece -Box, 4 W, ±200 ppm/°C, Copper Termination, Axial-Leaded, CGS SBC



# Documents

Product Drawings BCHE 4 W 6K8 5%

English

Datasheets & Catalog Pages 4-1773460-6\_RESISTIVE\_SOLUTIONS\_RAIL

English

1309350\_PASSIVE\_COMPONENT

English

### 8-1773459-4\_POWER\_FILTERING\_AND\_RESISTIVE\_SOLUTIONS\_FOR\_ELEVATORS\_AND\_ESCALATORS

English

High Power Resistor - Type SBC (Square Ceramic) Series - Tyco Electronics Passives

English