RL73H2BR16FTDF <

CGS | CGS RL73 TE Internal #: 2-1879462-5 16 Ω, Thick Film, Current Sensing Resistor, 1 %, 2 Termination, 1206, Taped & Reeled, .25 W, ±100 ppm/°C, Solder, Height .022 in [.55 mm], CGS RL73

View on TE.com >



Passive Components > Resistors > Surface Mount Resistors > Thick Film Resistor: Current Sense



Resistor Type: Current Sensing Resistor

Number of Terminations: 2

Package Size Code: 1206

Packaging Method: Taped & Reeled

Passive Component Tolerance: 1%

All Thick Film Resistor: Current Sense (796)

Features

Product Type Features

Resistor Type

Package Size Code

Current Sensing Resistor

1206

Element Type	Thick Film
Configuration Features	
Number of Resistors	1
Electrical Characteristics	
Passive Component Tolerance	1 %
Resistance Class	Up to 1kΩ
Resistance Value	16 Ω
Power Rating	.25 W
Termination Features	
Number of Terminations	2
Surface Mount Resistor Termination Type	Solder
Dimensions	
Product Height	.55 mm[.022 in]
Product Length	3.1 mm[.122 in]

C For support call+1 800 522 6752

02/24/2024 06:05PM | Page 1

RL73H2BR16FTDF

16 Ω, Thick Film, Current Sensing Resistor, 1 %, 2 Termination, 1206, Taped & Reeled, .25 W, ±100 ppm/°C, Solder, Height .022 in [.55 mm], CGS RL73



Product Width	1.55 mm[.061 in]
Usage Conditions	
Temperature Coefficient	±100 ppm/°C
Packaging Features	
Packaging Method	Taped & Reeled
Product Compliance For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Reflow solder capable to 260°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts


RL73H2BR16FTDF

16 Ω, Thick Film, Current Sensing Resistor, 1 %, 2 Termination, 1206, Taped & Reeled, .25 W, ±100 ppm/°C, Solder, Height .022 in [.55 mm], CGS RL73






Also in the Series | CGS RL73



Customers Also Bought

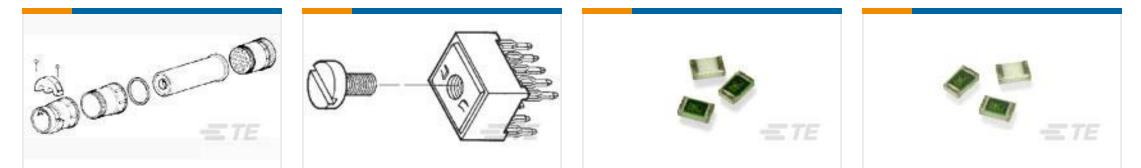

TE Part #207052-3 SZ23 UNASSM KIT,CPC	TE Part #5055556-9 10 POWER TAP ASSY .125	TE Part #1879337-1 CPF 0603 2K49 1% 50PPM 1K RL	TE Part #3-2176088-9 RP 1J 0.166W 1K96 0.1% 25PPM 1K RL
	THE REAL PROPERTY OF THE REAL		
TE Part #7-2176314-1 MELF SMA-A 15R 1% 50PPM 0102 0.3 W	TE Part #215079-8 MICRO-MATCH FOB.08P	TE Part #1-111595-1 050 ASSY SYS 50 PADDLEBOARD	TE Part #4-1825138-0 A208TZQ04

Documents

Product Drawings RL73H 2B R16 1% 1K RL

English

CAD Files

3D PDF

3D

RL73H2BR16FTDF

16 Ω, Thick Film, Current Sensing Resistor, 1 %, 2 Termination, 1206, Taped & Reeled, .25 W, ±100 ppm/°C, Solder, Height .022 in [.55 mm], CGS RL73



Customer View Model

ENG_CVM_CVM_2-1879462-5_BA.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2-1879462-5_BA.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2-1879462-5_BA.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages SMD Low Ohmic Current Sense Resistors - Type RL73 Series

English