

CGS | CGS RL73 TE Internal #: 2-1879463-3 82 Ω, Thick Film, Current Sensing Resistor, 1 %, 2 Termination, 1210, Taped & Reeled, .5 W, ±100 ppm/°C, Solder, Height .022 in [. 55 mm], CGS RL73

View on TE.com >



Passive Components > Resistors > Surface Mount Resistors > Thick Film Resistor: Current Sense



Resistor Type: Current Sensing Resistor

Number of Terminations: 2

Package Size Code: 1210

Packaging Method: Taped & Reeled

Passive Component Tolerance: 1%

All Thick Film Resistor: Current Sense (796)

Features

Product Type Features

Resistor Type

Package Size Code

Current Sensing Resistor

1210

Element Type	Thick Film
Configuration Features	
Number of Resistors	1
Electrical Characteristics	
Passive Component Tolerance	1 %
Resistance Class	Up to 1kΩ
Resistance Value	82 Ω
Power Rating	.5 W
Termination Features	
Number of Terminations	2
Surface Mount Resistor Termination Type	Solder
Dimensions	
Product Height	.55 mm[.022 in]
Product Length	3.1 mm[.122 in]

RL73H2ER82FTD

82 Ω, Thick Film, Current Sensing Resistor, 1 %, 2 Termination, 1210, Taped & Reeled, .5 W, ±100 ppm/°C, Solder, Height .022 in [.55 mm], CGS RL73



Product Width	2.6 mm[.102 in]
Usage Conditions	
Temperature Coefficient	±100 ppm/°C
Packaging Features	
Packaging Method	Taped & Reeled
Product Compliance For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Reflow solder capable to 260°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts


RL73H2ER82FTD

82 Ω, Thick Film, Current Sensing Resistor, 1 %, 2 Termination, 1210, Taped & Reeled, .5 W, ±100 ppm/°C, Solder, Height .022 in [.55 mm], CGS RL73






Also in the Series | CGS RL73



Customers Also Bought

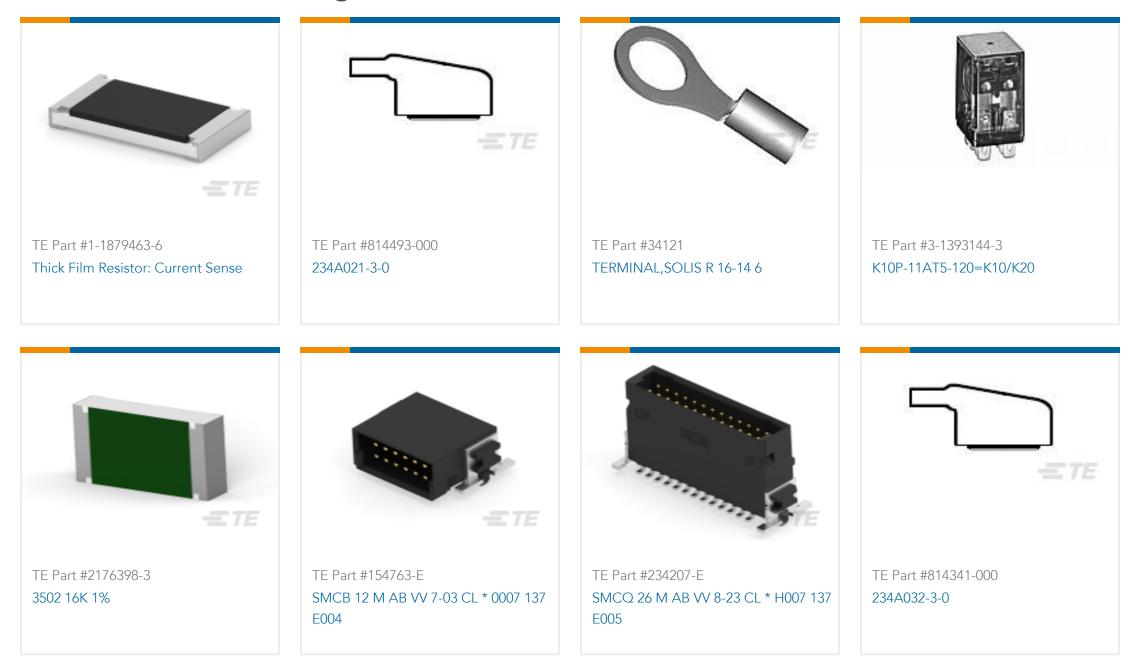

Documents

Product Drawings

RL73H 2E R82 1% 5K RL

English

CAD Files

3D PDF

3D

RL73H2ER82FTD

82 Ω, Thick Film, Current Sensing Resistor, 1 %, 2 Termination, 1210, Taped & Reeled, .5 W, ±100 ppm/°C, Solder, Height .022 in [.55 mm], CGS RL73



Customer View Model

ENG_CVM_CVM_2-1879463-3_BA.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2-1879463-3_BA.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2-1879463-3_BA.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages SMD Low Ohmic Current Sense Resistors - Type RL73 Series

English