



常州市凯丽金电子有限公司---微型贴片电声元器件专业生产商

KELIKING ELECTRONIC-----Micro Acoustical Device & piezo ceramic manufacturer

# SPECIFICATION FOR APPROVAL

## 承 認 書

Description : Earphone Speaker  
 Part No : KLJ-1030R32W3mW  
 Customer's Model No :  
 Specification No : KLJ-1030R32W3mW  
 Number Of The Edition : 3.1

CUSTOMER'S APPROVED SIGNATURE		



常州市凯丽金电子有限公司  
 KELIKING ELECTRONICS CO., LTD,

公司地址: 常州市天宁区恒生科技园 1-1301, Company ADD: Hengsheng1-1301  
 Science Park, Tianning District, Changzhou City 工厂地址:常州市天宁区三河口东塘路 1-1  
 号,Factory:Dongtang Road NO.1-1 sanhekou Tianning District Changzhou City  
 电话: 86-519-88671999-801, Tel: +86-519-88671999-801 传真: +86-519-  
 88671999-808, Fax: 86-519-88671999-808 网址: [www.kailijin.cn](http://www.kailijin.cn) (CN)  
[www.keliking.com](http://www.keliking.com)(EN) Http:[www.kailijin.cn](http://www.kailijin.cn)(CN) [www.keliking.com](http://www.keliking.com)(EN) 邮箱:  
[jimmy@keliking.com](mailto:jimmy@keliking.com) E-mail:[jimmy@keliking.com](mailto:jimmy@keliking.com) 手机: +86-13656128000 MOB:+86-  
 13656128000

Approved by	Checked by	Lssued by



## A. SCOPE 範疇

This specification applies Earphone Speaker KLJ-1030R32W3mW

## B. SPECIFICATION 规格

Parameter	Conditions/Description	Values	Unit
Rated Input Power		3	mW
Max Input Power		5	mW
Rated Impedance	at 1.0K Hz, 1mw input	32±15%	Ω
Sound Pressure Level (S.P.L.)	1.0W/0.1M at 50Hz-200Hz 201Hz-999Hz 1KHz 179mV with IEC711	103±3	dB
Resonant Frequency (Fo)	in free air At 1KHz 179mV	260±20%	Hz
Frequency Range		Fo~20K	Hz
Distortion	At 20Hz-8KHz At 179mV /711/EAR	≤3%	-
Magnet	NdFeB		
Buzz, Rattle, etc.	must be normal at sine wave between Fo ~ 20 kHz, in free air	0.30	V
	must be normal at sine wave between Fo ~ 20 kHz, in 1CC BOX	0.40	V
Polarity	cone will move forward with positive dc current to "+" terminal		
Weight		0.5	g
Operating Temperature		-20~+70	°C
Waterproof		NA	


**Notes: 1、Electrical performance can be adjusted according to user requirements**

**(产品使用的材料和电性能可以按用户要求来定制)**

**2、Above Measuring condition under temperature : 15~35°C R.H. 25~75%.**

**Accordig to standard GB/T9396-1996**

### C. APPEARANCE DRAWING 外觀尺寸图

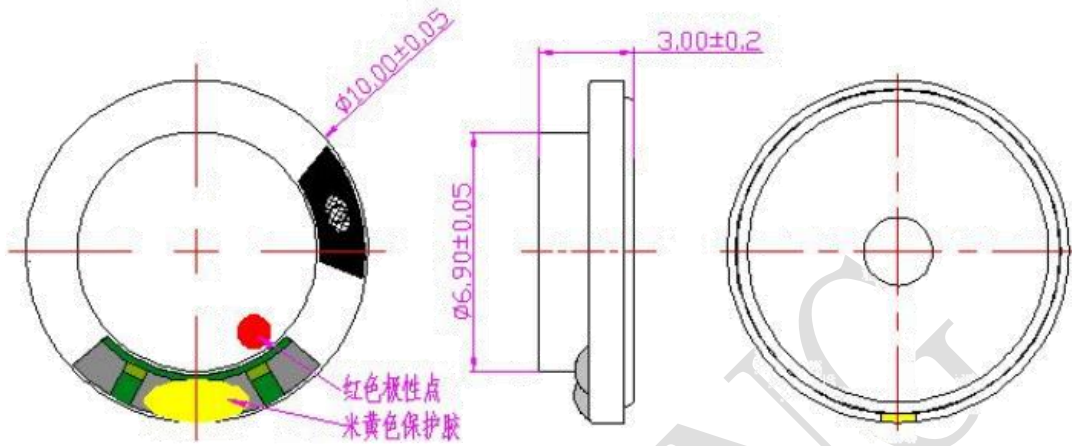

Tolerance general unless otherwise specified:  $\pm 0.5$ mm unit: mm


### CONSTRUCTION DETAIL

PART NO.	PART NAME	Q' TY	MATERIAL	REMARK
1	Diaphragm	1	Peek	$\phi 9.45 \times 0.3$
2	VOICE COIL	1	COPPER WIRE	$\phi 32$ 欧
3	Plate	1	SPCC	$\phi 5.0 \times 0.3$
4	Magnet	1	NdFeB	N40
5	Frame	1	Plastic	$\phi 10 \times 1$ 孔

### D. RESPONSE CURVES

#### Frequency Response Curve

Test condition: 1.0W/0.1M,(1CC), Total Harmonic Distortion Curve

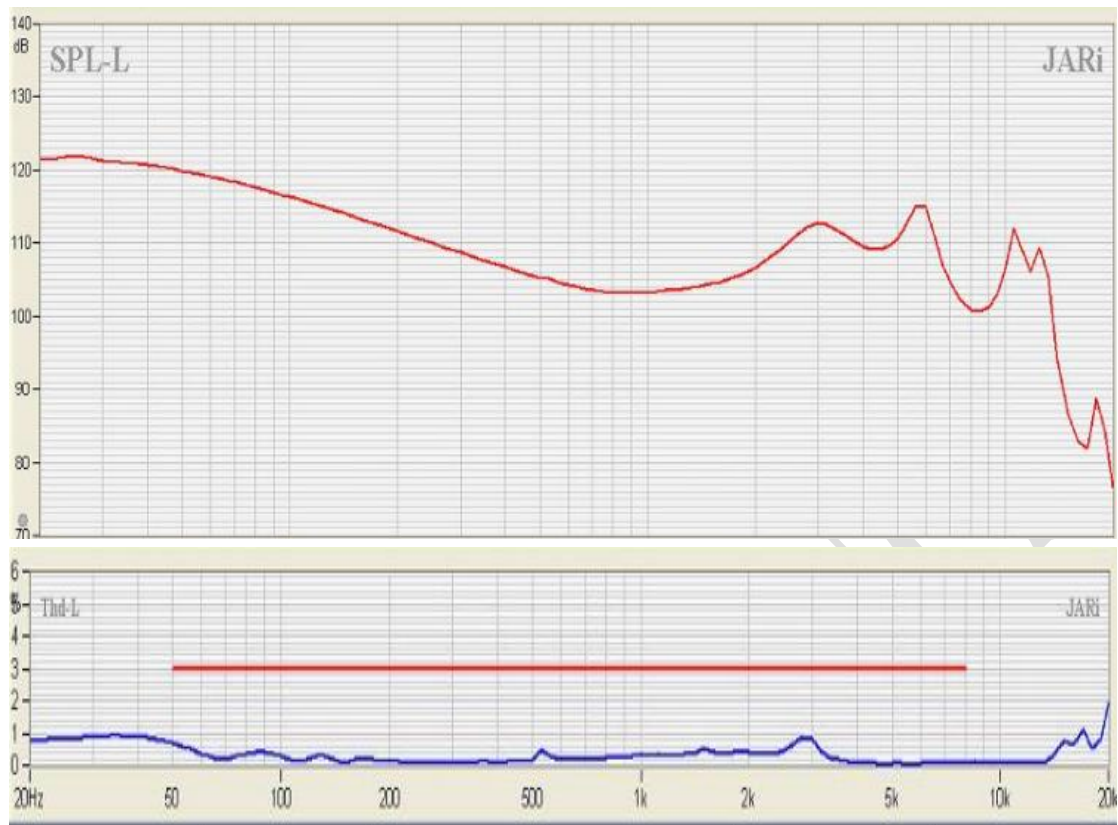


### E. RELIABILITY TEST


1	Reliability Test	After any following test, parts should conform to original performance within $\pm 3$ dB
2	Long-term rated power test	Input rated power pink noise to the speaker, low temperature ( $-20\pm 2^\circ$ ) for 24hrs,
3	Short-term maximum power test	Room temperature $25^\circ\text{C}$ Input 1sec Max power pink noise to the speaker, idle for 59sec, cycling 30times. 102 / 5000
4	Voice coil destructive test	(I) Room temperature $25^\circ\text{C}$ Input Max power DC signal for 30sec. 5Pcs for normal connection(Power+ $\rightarrow$ Speaker+, Power- $\rightarrow$ Speaker-) 5Pcs for inverse connection(Power+ $\rightarrow$ Speaker-, Power- $\rightarrow$ Speaker+) ( II ) Input Max power sweep signal to the speaker. Sweep frequency range: 200Hz to 20kHz, 6 sec time, 26 sec frequency transition for 9 hrs
5	Long-term temperature cycling test	Input rated power pink noise to the speaker Temperature range: $-20^\circ\text{C}\sim 60^\circ\text{C}$ Temperature change rate is $5\sim 10^\circ\text{C}/\text{min}$ , 15min at $-20^\circ\text{C}$ and $60^\circ\text{C}$ , cycling 50 times.
6	Long-term high temperature and high humidity test	Input rated power pink noise to the speaker Temperature $60^\circ\text{C}$ , humidity 90%RH for 72hrs.
7	Salt mist test	Salt mist concentration: 5% NaCl PH: 6.5~7.2 solution, which was continuously sprayed at $35^\circ\text{C}$ for 48 hours

## F.TESTING METHOD

### Standard test condition of speaker

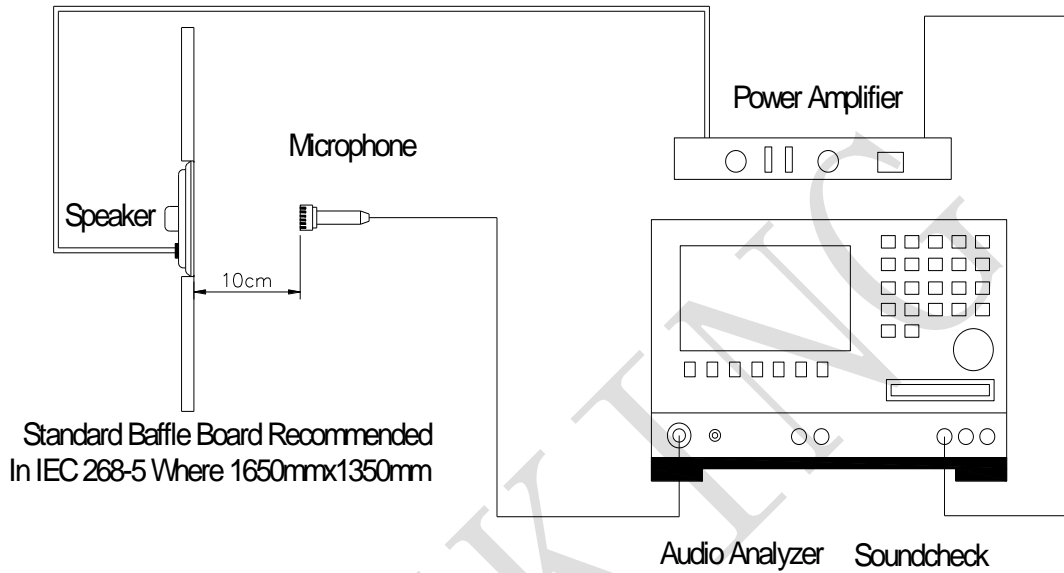

## G.RecommendDrivingCircuit

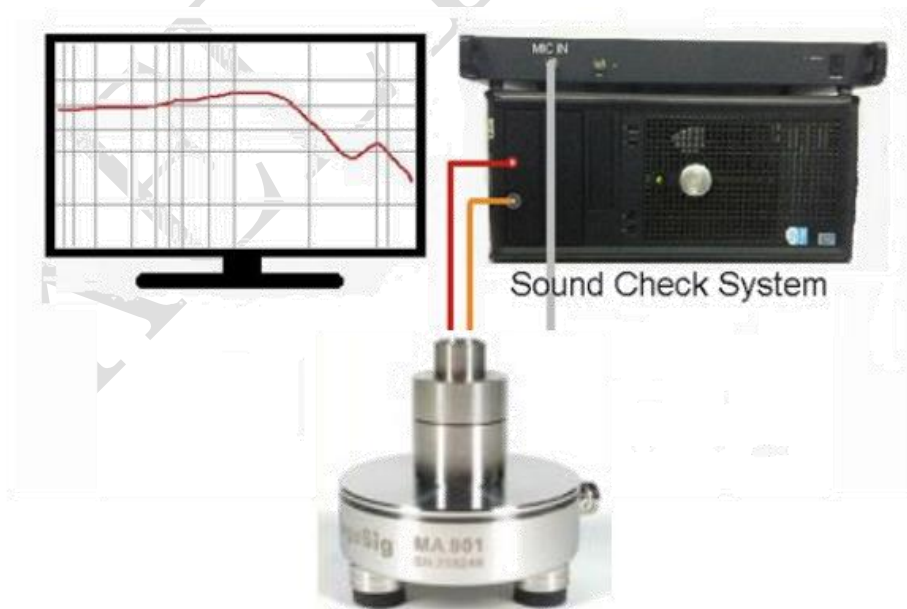



常州市凯丽金电子有限公司---微型贴片电声元器件专业生产商

KELIKING ELECTRONIC-----Micro Acoustical Device & piezo ceramic manufacturer

## H.PACKINGSTANDARD

units: cm

Remark:

100pcs per tray

20 trays for unit, 1units per carton

Total:2000 pcs per box

Size:41\*25\*34cm

