

1445996-1 ✓ ACTIVE




TE Internal #: 1445996-1

Tab Contact, Silver, 600 VAC, 600 VDC, 4 AWG Wire Size, 21 mm²

Wire Size, 41444 CMA Wire Size, Crimp, Copper Alloy, Power, -40 – 221 °F [-40 – 105 °C]

[View on TE.com >](#)

Connectors > Contacts > Connector Contacts

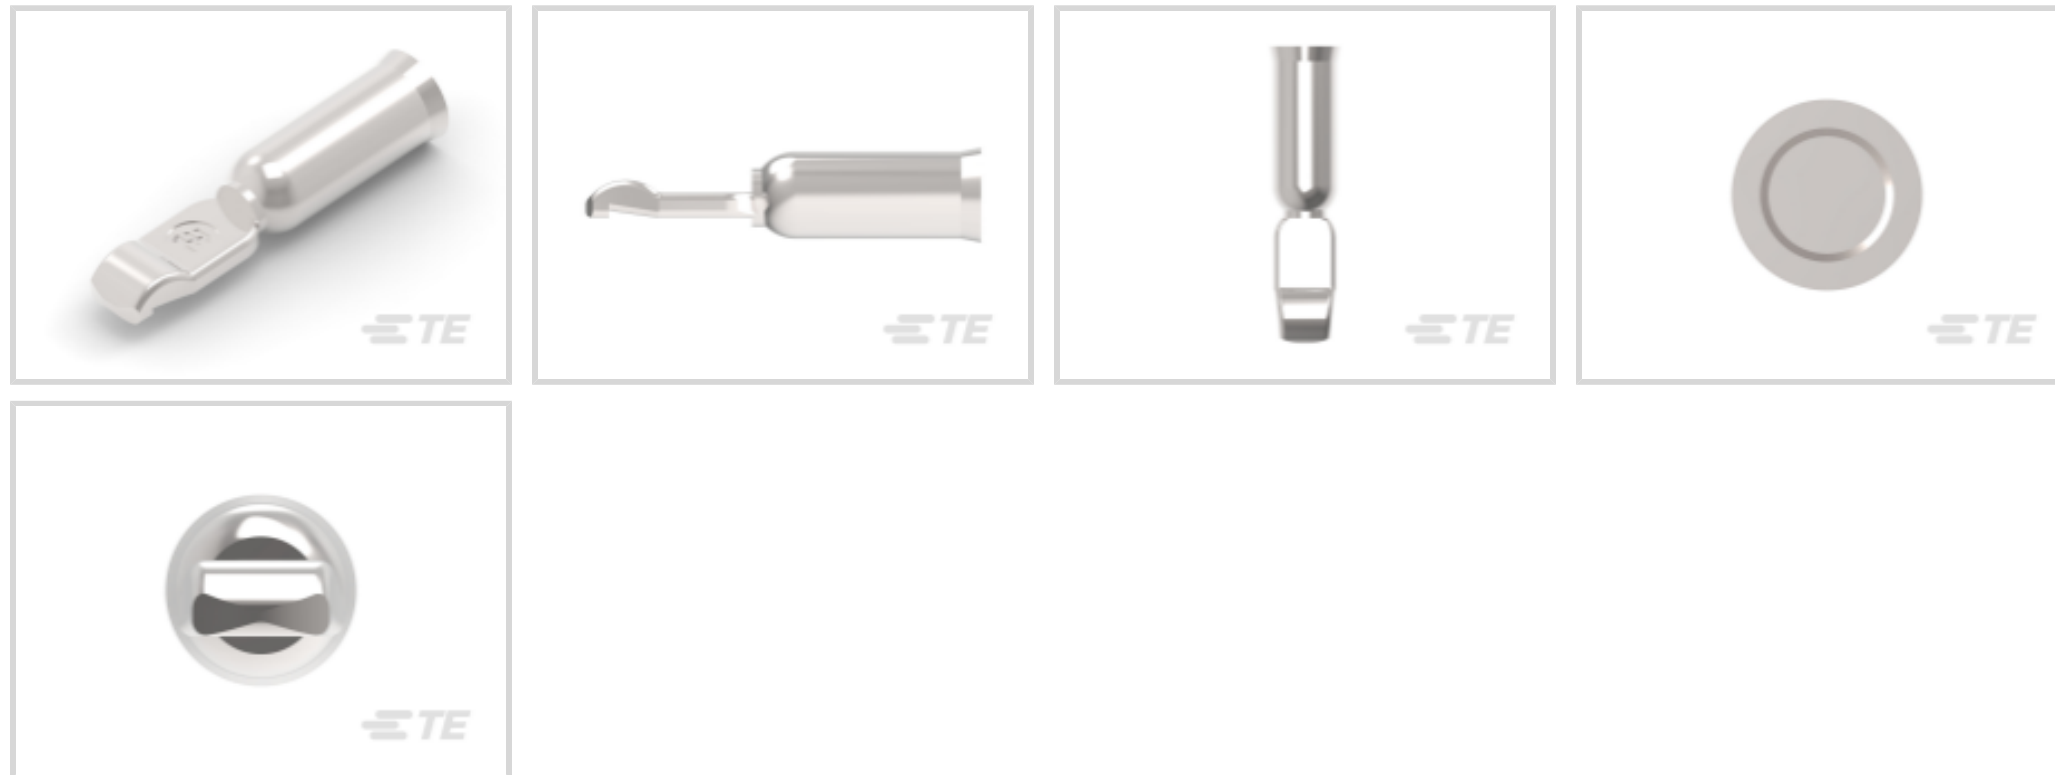

Contact Type: **Tab**

Contact Mating Area Plating Material: **Silver**

Wire Contact Termination Area Plating Material: **Silver**

Operating Voltage: **600 VDC**

Features

Product Type Features

Discrete Wire Type	Stranded
--------------------	----------

Electrical Characteristics

Operating Voltage	600 VDC
-------------------	---------

Contact Features

Mating Tab Width	10.6 mm[.417 in]
------------------	------------------

Mating Tab Thickness	4.85 mm[.191 in]
----------------------	------------------

Contact Underplating Material Thickness	50 μm[1.27 μin]
---	-----------------

Wire Contact Termination Area Plating Thickness	50 μm[1.27 μin]
---	-----------------

Wire Contact Termination Area Plating Material Finish	Matte
---	-------

Contact Mating Area Plating Material Thickness	1.27 μm[50 μin]
--	-----------------

Contact Orientation	Straight
---------------------	----------

Contact Underplating Material	Nickel
-------------------------------	--------

Barrel Type	Closed
-------------	--------

Contact Type	Tab
--------------	-----

Contact Mating Area Plating Material	Silver
--------------------------------------	--------



Wire Contact Termination Area Plating Material	Silver
--	--------

Contact Retention Within Housing	With
----------------------------------	------

Contact Base Material	Copper Alloy
-----------------------	--------------

Contact Current Rating (Max)	120 A
------------------------------	-------

Termination Features

Termination Method to Wire & Cable	Crimp
------------------------------------	-------

Product Terminates To	Wire & Cable
-----------------------	--------------

Dimensions

Wire Size	41444 CMA
-----------	-----------

Usage Conditions

Operating Temperature Range	-40 – 105 °C[-40 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power
---------------------	-------

Industry Standards

Compatible With Agency/Standards Products	UL
---	----

UL Flammability Rating	UL 94V-0
------------------------	----------

Packaging Features

Packaging Quantity	500
--------------------	-----

Packaging Method	Loose Piece
------------------	-------------

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
------------------------------	-----------

EU ELV Directive 2000/53/EC	Compliant
-----------------------------	-----------

China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
---	---

EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
--	---

Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
-----------------	---

Solder Process Capability	Not applicable for solder process capability
---------------------------	--



Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Customers Also Bought



TE Part #2292534-1
PROTECTION CAP,TE,WATER DRAIN



TE Part #2311753-2
2POS,PCON12,REC HSG ASSY,
180DEG,COD B



TE Part #2371494-1
DIE SET HVA630-2P 2X4MM2



TE Part #2383853-4
H&S 50mm, Shield Sleeve



TE Part #2383855-2
H&S 50mm, Crimp anvil



TE Part #2394111-2
H&S 50mm, SWS




TE Part #2394112-2
H&S 50mm, Cable clip



TE Part #2394113-2
H&S 50mm, Cable cover



TE Part #2395861-2
H&S 50mm, Inner housing



TE Part #1445994-1
120A HSG SUBASY,GRAY

Documents

Product Drawings

CONTACT, 120 PWR PROD,4 AWG

English

CAD Files

Customer View Model



[ENG_CVM_CVM_1445996-1_A.2d_dxf.zip](#)

English

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_1445996-1_A.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1445996-1_A.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[POWER_CONNECTORS_CATALOG_SEC02_CABLE_MOUNTED](#)

English

[2_PIECE_POWER_CONNECTORS_qrg_4-1773458-1](#)

English

Product Specifications

[Application Specification](#)

English