

AMP | Junior Power Timer

TE Internal #: 2-967624-1 Housing for Female Terminals, Wire-to-Wire, 18 Position, .197 in [5 mm] Centerline, White, Signal, Cable Mount (Free-Hanging), Junior Power Timer

View on TE.com >





Connector System: Wire-to-Wire

Number of Positions: 18

Connector & Housing Type: Housing for Female Terminals

Centerline (Pitch): 5 mm [.197 in]

Sealable: No

All Timer Connector Housing (525)

Features

Product Type Features

Mixed & Hybrid Connector

Connector Shape

No

Rectangular



Connector System	Wire-to-Wire	
Connector & Housing Type	Housing for Female Terminals	
Sealable	No	
Primary Locking Feature	On the Terminal	
Configuration Features		
Number of Positions	18	
Number of Rows	3	
Electrical Characteristics		
Nominal Voltage Architecture	28 V	
Body Features		
Primary Product Color	White	
Connector & Keying Code	В	
Contact Features		
Contact Size	2.8mm	

Housing for Female Terminals, Wire-to-Wire, 18 Position, .197 in [5 mm] Centerline, White, Signal, Cable Mount (Free-Hanging), Junior Power Timer



Contact Type	Receptacle
Mating Tab Width	2.8 mm[.11 in]
Contact Current Rating (Max)	30 A
Mechanical Attachment	
Terminal Position Assurance	Yes
Strain Relief	Without
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Housing Material	PBT GF
Centerline (Pitch)	5 mm[.197 in]
Dimensions	
Connector Height	26.5 mm[1.043 in]
Product Length	34.8 mm[1.37 in]
Usage Conditions	
Operating Temperature (Max)	100 °C[212 °F]

Operating Temperature Range

-30 – 100 °C[-22 – 212 °F]

Operation/Application

Circuit Application	Signal	
Packaging Features		
Packaging Quantity	1000	
Packaging Method	Carton	
Other		
Serviceable	No	
Connector Position Assurance Capable	No	
Product Compliance For compliance documentation, visit the product page on TE.com>		
EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	

Housing for Female Terminals, Wire-to-Wire, 18 Position, .197 in [5 mm] Centerline, White, Signal, Cable Mount (Free-Hanging), Junior Power Timer



EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free


Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts

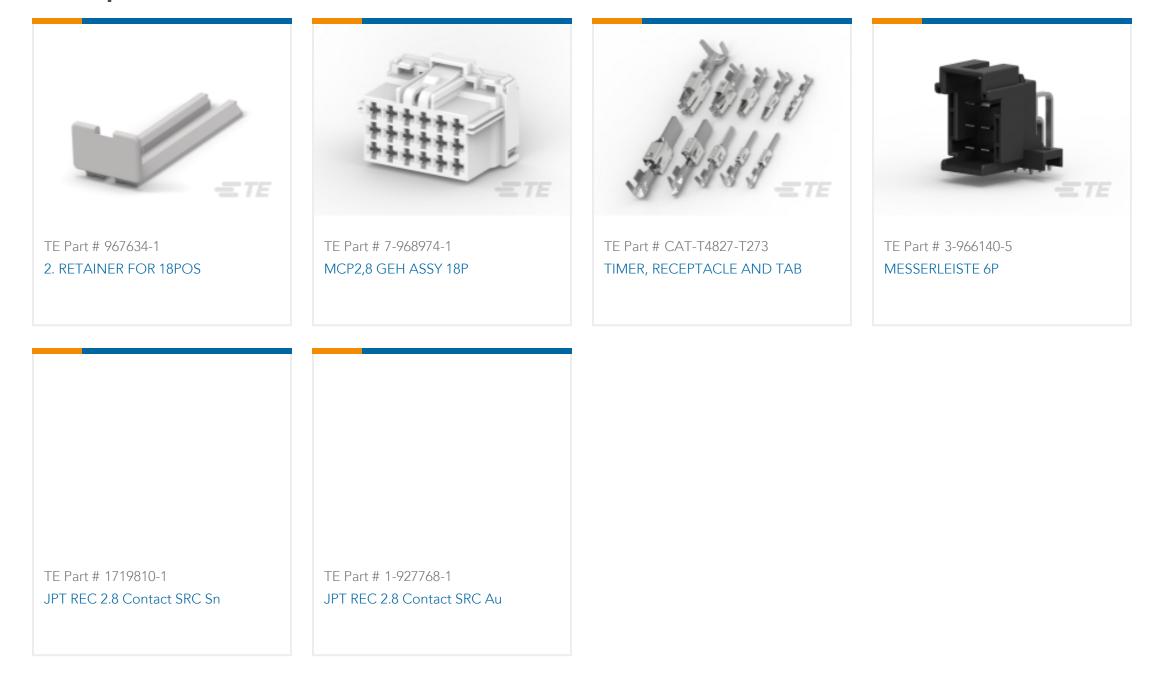

Also in the Series | Junior Power Timer

Housing for Female Terminals, Wire-to-Wire, 18 Position, .197 in [5 mm] Centerline, White, Signal, Cable Mount (Free-Hanging), Junior Power Timer



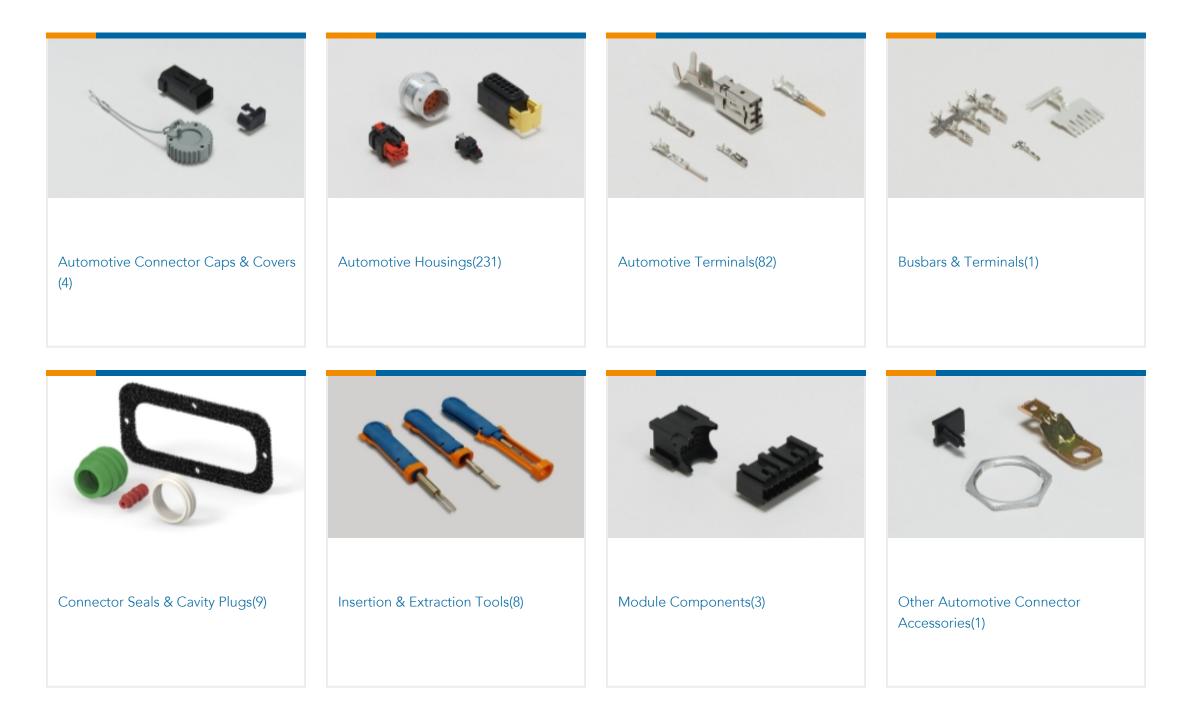

Customers Also Bought



Timer Connector Housing	6POS MQS REC COD A	FASTON .250 SERIES (6.3 MM) HOUSING	AMP MCP Unsealed Connector Housings
TE Part #2329592-2 20POS,MQS,REC HSG,UNSLD	TE Part #2379921-2 21POS,AMP MCP 2.8,REC HSG ASSY, UNSLD	TE Part #2137354-1 SECOND LOCKING DEVICE, FOR AMP-MCP 18P	TE Part #3-1813099-2 2.5mm SOCKET HSG ASSEMBLY (GREEN 3POS)

Documents

Product Drawings JUN-POW-TIM GEH 18P				
English				
CAD Files 3D PDF				
3D Customer View Model ENG_CVM_CVM_2-967624-1_C.2d_dxf.zip				

C For support call+1 800 522 6752

Housing for Female Terminals, Wire-to-Wire, 18 Position, .197 in [5 mm] Centerline, White, Signal, Cable Mount (Free-Hanging), Junior Power Timer



English **Customer View Model ENG_CVM_CVM_2-967624-1_C.3d_igs.zip** English

Customer View Model

ENG_CVM_CVM_2-967624-1_C.3d_stp.zip

English

By downloading the CAD file I accept and agree to the $\ensuremath{\text{Terms}}$ and $\ensuremath{\text{Conditions}}$ of use.

Datasheets & Catalog Pages Timer Interconnection System

English

Product Specifications

Product Specification

English

Product Specification

English