


DEUTSCH | DEUTSCH NTSEAL

TE Internal #: 1-2350890-4 Plug, Cable-to-Cable, 20 Position, .15 in [3.8 mm] Centerline, Sealable, Blue, Wire & Cable, Cable Mount (Free-Hanging), DEUTSCH NTSEAL

View on TE.com >

Connectors > Automotive Connectors > Automotive Housings

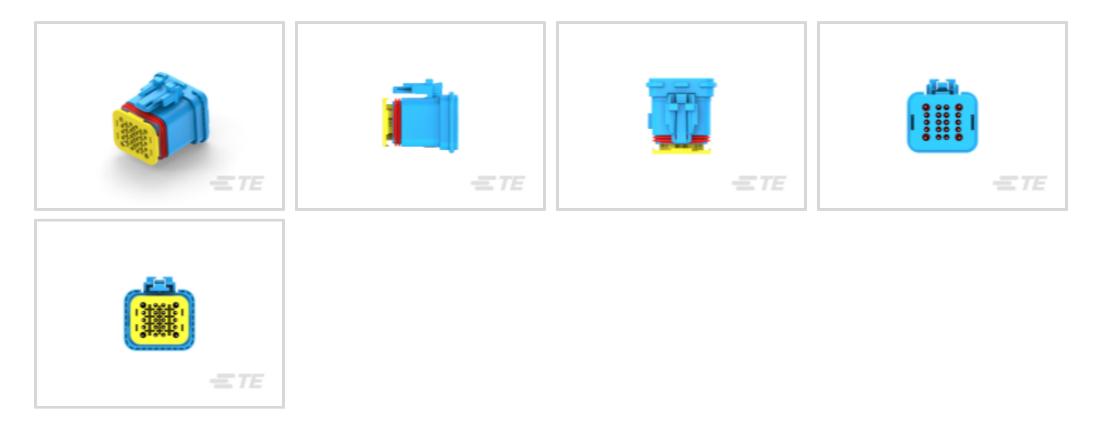

Connector System: Cable-to-Cable

Number of Positions: 20

Connector & Housing Type: Plug

Centerline (Pitch): 3.8 mm [.15 in]

Sealable: Yes

Features

connectivity

Product Type Features

Mixed & Hybrid Connector	Yes							
Connector Shape	Rectangular							
Connector System	Cable-to-Cable							
Connector & Housing Type	Plug							
Sealable	Yes							
Connector & Contact Terminates To	Wire & Cable							
Primary Locking Feature	Locking Lance							
Configuration Features								
Number of Positions	20							
Number of Rows	4							
Body Features								
Primary Product Color	Blue							
Connector & Keying Code	D							
Contact Features								

C For support call+1 800 522 6752

Plug, Cable-to-Cable, 20 Position, .15 in [3.8 mm] Centerline, Sealable, Blue, Wire & Cable, Cable Mount (Free-Hanging), DEUTSCH NTSEAL



Contact Size	Size 16, Size 20
Contact Current Rating (Max)	13 A
Mechanical Attachment	
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Centerline (Pitch)	3.8 mm[.15 in]
Usage Conditions	
Operating Temperature (Max)	125 °C[257 °F]
Operating Temperature Range	-40 - 125 °C[-40 - 257 °F]
Other	
Connector Position Assurance Capable	No

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU

Compliant

EU ELV Directive 2000/53/EC			
China RoHS 2 Directive MIIT Order No 32, 2016			
EU REACH Regulation (EC) No. 1907/2006			
Halogen Content			
Solder Process Capability			

Compliant

No Restricted Materials Above Threshold

Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) SVHC > Threshold: Octamethylcyclotetrasiloxane (D4) (.5% in Component Part) Decamethylcyclopentasiloxane (D5) (.5% in Component Part) Dodecamethylcyclohexasiloxane (D6) (.5% in Component Part) Article Safe Usage Statements: Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Not reviewed for solder process capability

Product Compliance Disclaimer

Plug, Cable-to-Cable, 20 Position, .15 in [3.8 mm] Centerline, Sealable, Blue, Wire & Cable, Cable Mount (Free-Hanging), DEUTSCH NTSEAL



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts






Also in the Series | DEUTSCH NTSEAL

Plug, Cable-to-Cable, 20 Position, .15 in [3.8 mm] Centerline, Sealable, Blue, Wire & Cable, Cable Mount (Free-Hanging), DEUTSCH NTSEAL



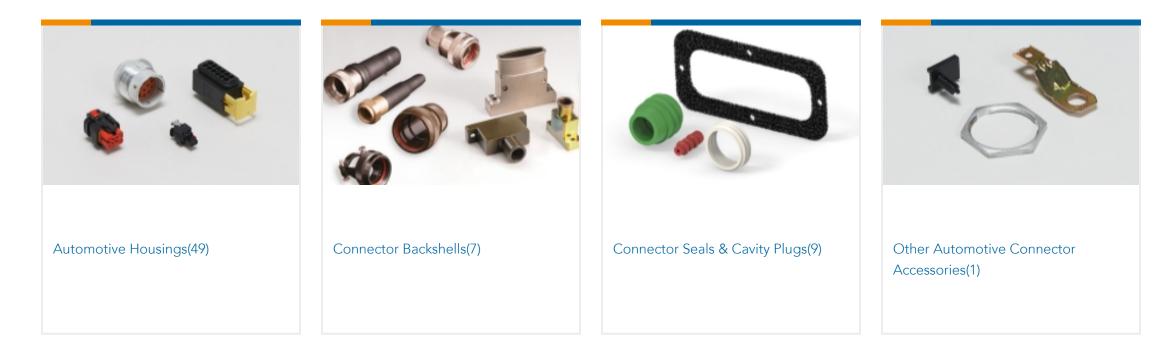

Customers Also Bought



20POS,HYBRID,SOC HSG ASSY,SLD,	20POS,HYBRID,PIN HSG ASSY,SLD,	20POS,HYBRID,PIN HSG,SLD,COD C	20POS, HYBRID, PIN HSG ASSY, SLD,
CODC	COD B		CODD

Documents

Product Drawings

```
20POS, HYBRID, SOC HSG ASSY, SLD, COD D
```

English

20POS, HYBRID, SOC HSG ASSY, SLD, COD D

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1-2350890-4_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1-2350890-4_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1-2350890-4_A.3d_stp.zip

Plug, Cable-to-Cable, 20 Position, .15 in [3.8 mm] Centerline, Sealable, Blue, Wire & Cable, Cable Mount (Free-Hanging), DEUTSCH NTSEAL



English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications

Application Specification

English

Agency Approvals

UL Report

English