

## AMP | Superseal Pro TE Internal #: 2327042-1 Housing for Male Terminals, Wire-to-Wire, 2 Position, .197 in [5 mm] Centerline, Sealable, Black, Wire & Cable, Signal, Superseal Pro

#### View on TE.com >

Connectors > Automotive Connectors > Automotive Housings



Connector System: Wire-to-Wire

Number of Positions: 2

Connector & Housing Type: Housing for Male Terminals

Centerline (Pitch): 5 mm [.197 in ]

Sealable: Yes

### Features



#### Product Type Features

Mixed & Hybrid Connector	No				
Connector Shape	Rectangular				
Connector System	Wire-to-Wire				
Connector & Housing Type	Housing for Male Terminals				
Sealable	Yes				
Connector & Contact Terminates To	Wire & Cable				
Primary Locking Feature	Clean Body				
Configuration Features					
Number of Positions	2				
Number of Rows	1				
Electrical Characteristics					
Operating Voltage	12 VDC				
Nominal Voltage Architecture	12 V				
Body Features					

**C** For support call+1 800 522 6752

Housing for Male Terminals, Wire-to-Wire, 2 Position, .197 in [5 mm] Centerline, Sealable, Black, Wire & Cable, Signal, Superseal Pro



Cable Exit Angle	180°
Primary Product Color	Black
Connector & Keying Code	A
Contact Features	
Contact Size	1.2mm
Contact Current Rating (Max)	7.5 A, 14 A
Mechanical Attachment	
Terminal Position Assurance	Yes
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Housing Material	PBT GF
Centerline (Pitch)	5 mm[.197 in]
Dimensions	
Connector Height	17.02 mm[.67 in]
Product Width	17.15 mm[.675 in]
Product Length	46.38 mm[1.826 in]
Usage Conditions	
Operating Temperature (Max)	125 °C[257 °F]
Operating Temperature Range	-40 – 125 °C[-40 – 257 °F]
Operation/Application	
Circuit Application	Signal
Industry Standards	
Degree of Protection	IP67, IP69K
Compatible With Agency/Standards Products	SAE/USCAR-2
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Quantity	800
Packaging Method	Package
Other	

**C** For support call+1 800 522 6752

Housing for Male Terminals, Wire-to-Wire, 2 Position, .197 in [5 mm] Centerline, Sealable, Black, Wire & Cable, Signal, Superseal Pro



Serviceable	Yes				
Connector Position Assurance Capable	No				
Product Compliance					
For compliance documentation, visit the product page on TE.com>					
EU RoHS Directive 2011/65/EU	Compliant				
EU ELV Directive 2000/53/EC	Compliant				
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold				
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC				
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.				
Solder Process Capability	Not reviewed for solder process capability				

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

## **Compatible Parts**



Housing for Male Terminals, Wire-to-Wire, 2 Position, .197 in [5 mm] Centerline, Sealable, Black, Wire & Cable, Signal, Superseal Pro






# Also in the Series | Superseal Pro



# Customers Also Bought

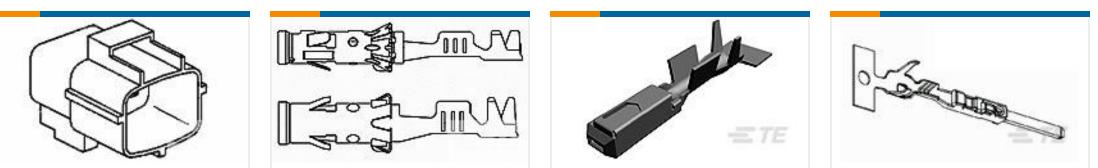

#174663-2	TE Part #929974-8	TE Part #1241608-6	TE Part #2141114-1
HSG MARK II+	2,5MM ST-KONT EDS	MQS1,5 Ag rec CB unseal. 0,75-1,5	MCON 1.2 CB TAB SWS SN
TE	TTE TE		ETE
#1544980-1	TE Part #1544967-1	TE Part #1544970-1	TE Part #1703402-1
WSING, 8MM NG1 PLUS, 2	TAB, 8MM NG1 PLUS	SEAL, NG9K	COVER,90,24POS.



Housing for Male Terminals, Wire-to-Wire, 2 Position, .197 in [5 mm] Centerline, Sealable, Black, Wire & Cable, Signal, Superseal Pro



### Documents

Product Drawings 2POS,MCON 1.2,TAB HSG ASSY,SLD,COD A

English

2POS,MCON 1.2,TAB HSG ASSY,SLD,COD A

English

**CAD** Files

3D PDF

3D

Customer View Model ENG\_CVM\_CVM\_2327042-1\_C.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_2327042-1\_C.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_2327042-1\_C.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Superseal Pro Connector series-Applications

English

#### Product Specification

English

Product Specification

English