
1-962692-2 - ACTIVE

AMP | MQS

TE Internal #: 1-962692-2 Housing for Male Terminals, Wire-to-Wire, 18 Position, .1 in [2.54 mm] Centerline, Black, Wire & Cable, Signal, Cable Mount (Free-Hanging), MQS

View on TE.com >

Connectors > Automotive Connectors > Automotive Housings > MQS, CONNECTOR HOUSING

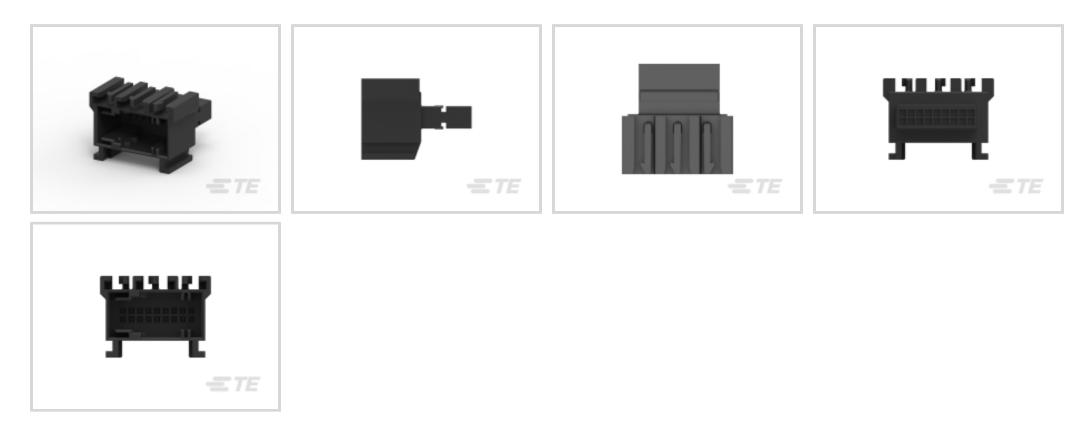

Connector System: Wire-to-Wire

Number of Positions: 18

Connector & Housing Type: Housing for Male Terminals

Centerline (Pitch): 2.54 mm [.1 in]

Sealable: No

All MQS, CONNECTOR HOUSING (437)

connectivity

Features

Product Type Features

Mixed & Hybrid Connector	No			
Connector Shape	Rectangular			
Connector System	Wire-to-Wire			
Connector & Housing Type	Housing for Male Terminals			
Sealable	No			
Connector & Contact Terminates To	Wire & Cable			
Primary Locking Feature	Integrated in Housing			
Configuration Features				
Number of Positions	18			
Number of Rows	2			
Electrical Characteristics				
Nominal Voltage Architecture	16 V			

Housing for Male Terminals, Wire-to-Wire, 18 Position, .1 in [2.54 mm] Centerline, Black, Wire & Cable, Signal, Cable Mount (Free-Hanging), MQS



Body Features

Cable Exit Angle	180°				
Primary Product Color	Black				
Connector & Keying Code	C-F				
Contact Features					
Contact Size	.63mm				
Contact Type	Tab				
Mating Tab Width	.63 mm[.025 in]				
Contact Current Rating (Max)	7.5 A				
Mechanical Attachment					
Terminal Position Assurance	No				
Strain Relief	Without				
Mating Alignment Type	Keyed				
Mating Alignment	With				
Connector Mounting Type	Cable Mount (Free-Hanging)				
Housing Features					

Housing Material

PBT

5					
Centerline (Pitch)	2.54 mm[.1 in]				
Dimensions					
Connector Height	24.2 mm[.952 in]				
Product Width	32.8 mm[1.29 in]				
Product Length	33 mm[1.29 in]				
Row-to-Row Spacing	2.54 mm[.1 in]				
Usage Conditions					
Operating Temperature (Max)	120 °C[248 °F]				
Operating Temperature Range	-40 – 120 °C[-40 – 248 °F]				
Operation/Application					
Circuit Application	Signal				
Packaging Features					
Packaging Quantity	600				
Packaging Method	Box				

Other

C For support call+1 800 522 6752

Housing for Male Terminals, Wire-to-Wire, 18 Position, .1 in [2.54 mm] Centerline, Black, Wire & Cable, Signal, Cable Mount (Free-Hanging), MQS



Serviceable	No	
Connector Position Assurance Capable	No	
Product Compliance For compliance documentation, visit the product page on TE.com>		
EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC	
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free	
Solder Process Capability	Not applicable for solder process capability	

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as

EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts




Housing for Male Terminals, Wire-to-Wire, 18 Position, .1 in [2.54 mm] Centerline, Black, Wire & Cable, Signal, Cable Mount (Free-Hanging), MQS






Also in the Series | MQS

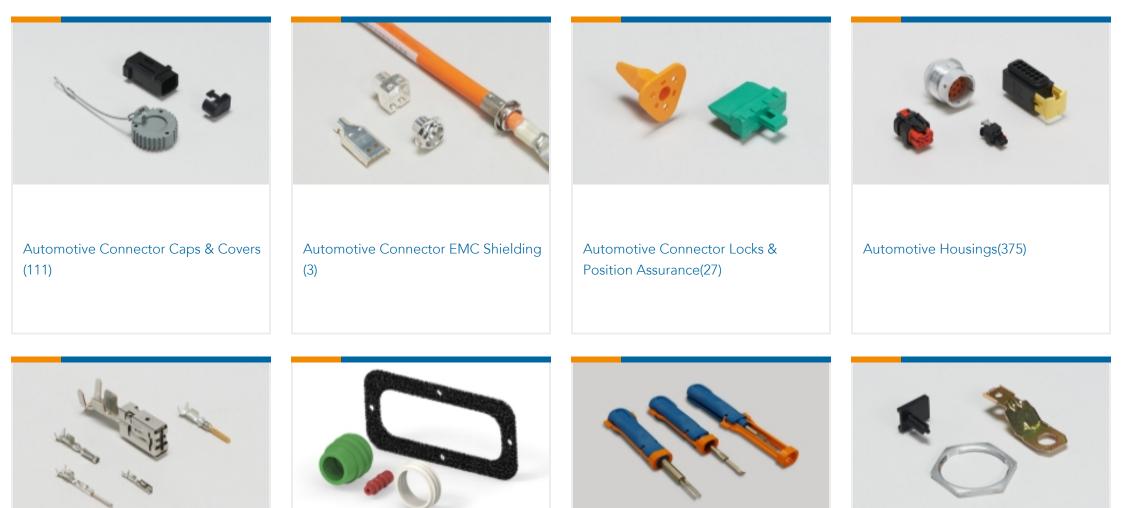

Automotive Terminals(89)	Connector Seals & Cavity Plugs(26)	Insertion & Extraction Tools(42)	Other Automotive Connector Accessories(7)

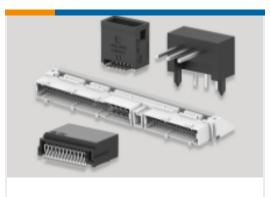

PCB Headers & Receptacles(143)

Customers Also Bought



Housing for Male Terminals, Wire-to-Wire, 18 Position, .1 in [2.54 mm] Centerline, Black, Wire & Cable, Signal, Cable Mount (Free-Hanging), MQS







Documents

Product Drawings 18POS MQS TAB COD C-F

English

CAD Files Customer View Model ENG_CVM_CVM_1-962692-2_E.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1-962692-2_E.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1-962692-2_E.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages Micro Quadlok Interconnection System (MQS)

English

Product Specifications Application Specification

English