

RSF-876.500-35000-1109-TR-NS2


- ❖ Low-Loss RF Filter for Mobile Telephone WCDMA / LTE Band 26 systems, Receive Path (RX).
- ❖ Useable Passband 35 MHz.
- ❖ Suitable for Diversity Applications.
- ❖ Impedance 50 Ω Input and Output.
- ❖ Unbalanced to Unbalanced Operation.
- ❖ RoHS Compatible.

Electrical Specification

Parameters		Value	Unit
Center Frequency (Fo)		876.500	MHz
Insertion Loss, typ/max	859 ~ 894 MHz	1.8 / 3.0	dB
Amplitude Ripple, typ/max	859 ~ 894 MHz	0.8 / 2.0	dB
VSWR, typ/max	859 ~ 894 MHz	1.6 / 2.0	-
Attenuation, min/typ	10 ~ 814 MHz	-30 / -35	dB
	814 ~ 849 MHz	-35 / -38	dB
	935 ~ 979 MHz	-22 / -25	dB
	979 ~ 6000 MHz	-28 / -33	dB
DC Voltage	@ 25 \pm 2 deg.C	5	V
Input Power, max	@ 2000 h	15	dBm
ESD Voltage ESD (MM, 10 negative & 10 positive pulse)		100	VDC
Terminating Source Impedance, unbalanced		50 // 36	Ω // nH
Terminating Load Impedance, unbalanced		50 // 36	Ω // nH
Operating Temperature Range		-30 ~ +85	$^{\circ}$ C
Storage Temperature Range		-40 ~ +85	$^{\circ}$ C

Note: Specification at T= -20 ~ +80 $^{\circ}$ C

Dimensions

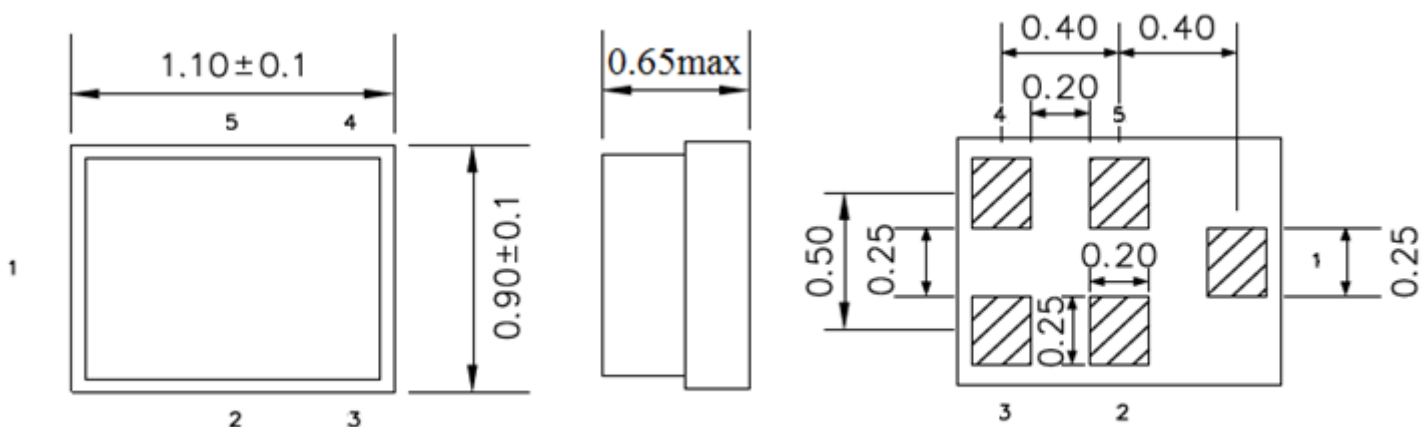


Unit: mm


RSF-876.500-35000-1109-TR-NS2

PIN #	PIN NAME	DESCRIPTION
1	IN	Input
2	GND	Ground
3	GND	Ground
4	OUT	Output
5	GND	Ground

Test Circuit

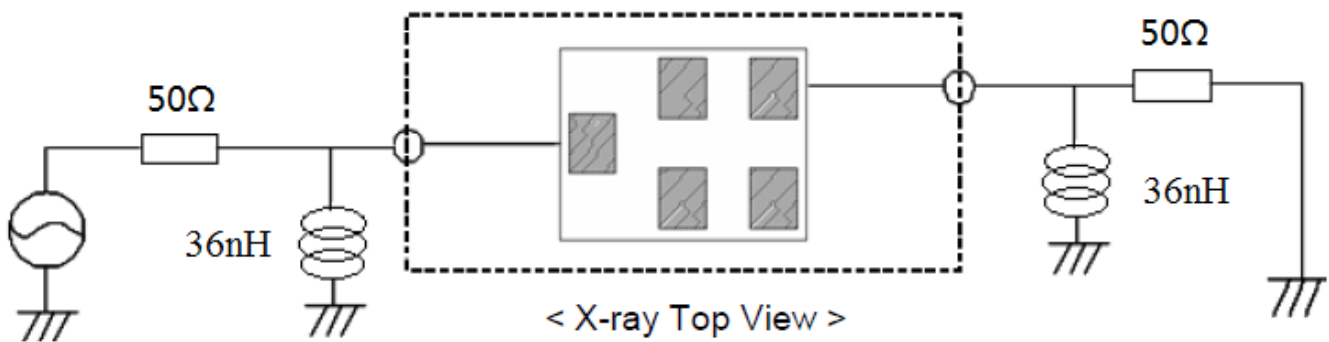

Frequency Characteristics

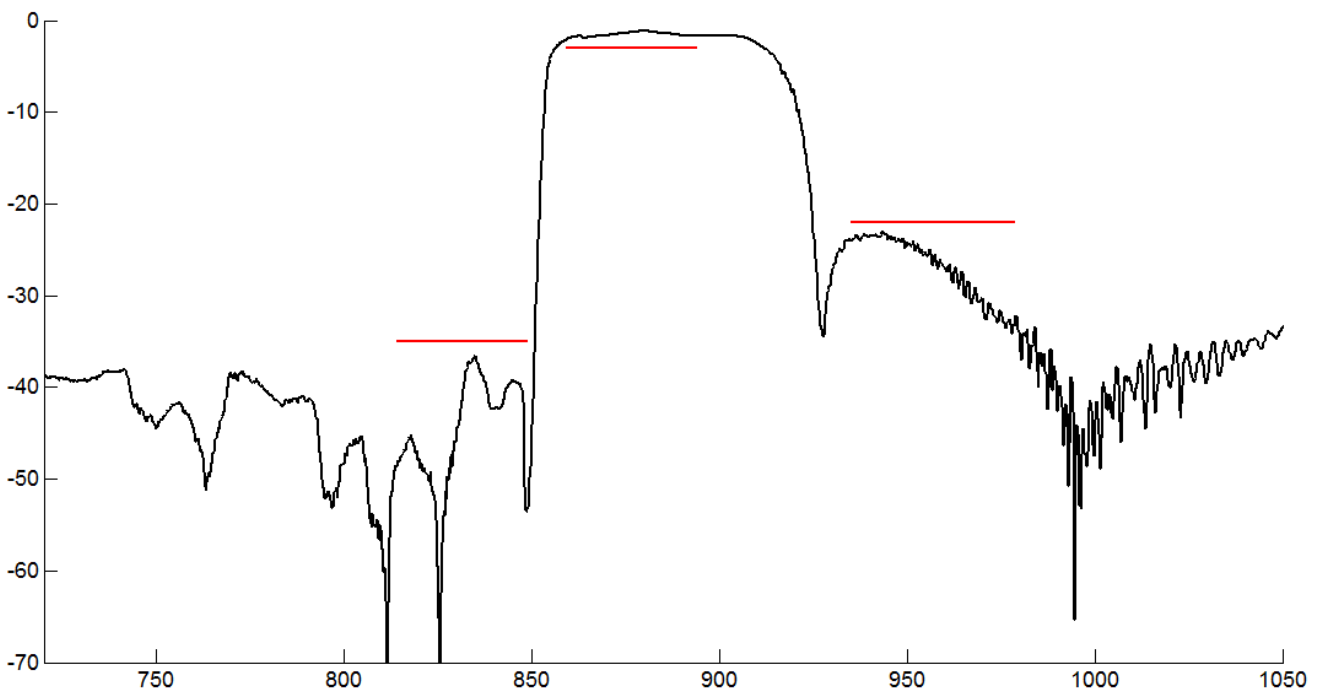

Environmental

PARAMETER	VALUE
MOISTURE SENSITIVITY LEVEL	2
REACH – SVHC	Compliant
RoHS	Compliant

● APPROVAL

DRAWN BY	AR, January 10, 2019
APPROVED BY	CP, January 10, 2019
REVISION	A, Initial Release

Raltron Electronics / RAMI Technology USA, LLC, including its affiliates, employees, agents and other persons acting on its behalf (collectively Raltron/RAMI Tech), disclaim any and all liability for any errors or inaccuracies contained in this data sheet. While Raltron/RAMI Tech has made every reasonable effort to ensure the accuracy of all product information, specifications and data contained herein, Raltron/RAMI Tech does not guarantee that the information is accurate, reliable or current. The product information is provided only for reference purposes only and is subject to change, correction or revision, at any time without notice. Raltron/RAMI Tech does not assume any liability arising out of an application or use of any product described herein and disclaims any warranties expressed or implied. The user of products in such applications shall assume all risks of such use and will agree to hold Raltron/RAMI Tech, harmless against all damages.

Copyright © 2016, Raltron Electronics / RAMI Technology USA, LLC. All rights reserved. No part of this document may be reproduced in any form without the prior written permission of Raltron Electronics / RAMI Technology USA, LLC.