

August 1997

Features

- ON-Resistance (Max)..... 85Ω
- Low Power Consumption ($P_D < 1.6\text{mW}$)
- Fast Switching Action
 - t_{ON} <250ns
 - t_{OFF} <120ns (DG441)
- Low Charge Injection
- Upgrade from DG201A/DG202
- TTL, CMOS Compatible
- Single or Split Supply Operation

Applications

- Audio Switching
- Battery Operated Systems
- Data Acquisition
- Hi-Rel Systems
- Sample and Hold Circuits
- Communication Systems
- Automatic Test Equipment

Description

The DG441 and DG442 monolithic CMOS analog switches are drop-in replacements for the popular DG201A and DG202 series devices. They include four independent single pole single throw (SPST) analog switches, TTL and CMOS compatible digital inputs, and a voltage reference for logic thresholds.

These switches feature lower analog ON resistance (<85Ω) and faster switch time ($t_{ON} < 250\text{ns}$) compared to the DG201A and DG202. Charge injection has been reduced, simplifying sample and hold applications.

The improvements in the DG441 series are made possible by using a high voltage silicon-gate process. An epitaxial layer prevents the latch-up associated with older CMOS technologies. The 44V maximum voltage range permits controlling 40Vp-p signals. Power supplies may be single-ended from +5V to +34V, or split from ±5V to ±20V.

The four switches are bilateral, equally matched for AC or bidirectional signals. The ON resistance variation with analog signals is quite low over a ±5V analog input range. The switches in the DG441 and DG442 are identical, differing only in the polarity of the selection logic.


Ordering Information

PART NUMBER	TEMP. RANGE (°C)	PACKAGE	PKG. NO.
DG441AK/883 (Note 2)	-55 to 125	18 Ld CERDIP	F16.3
DG441DJ	-40 to 85	16 Ld PDIP	E16.3
DG441DY	-40 to 85	16 Ld SOIC	M16.15
DG441EJ (Note 1)	-40 to 85	16 Ld PDIP	E16.3
DG441EY (Note 1)	-40 to 85	16 Ld SOIC	M16.15
DG442AK/883 (Note 2)	-55 to 125	16 Ld CERDIP	F16.3
DG442DJ	-40 to 85	16 Ld PDIP	E16.3
DG442DY	-40 to 85	16 Ld SOIC	M16.15
DG442EJ (Note 1)	-40 to 85	16 Ld PDIP	E16.3
DG442EY (Note 1)	-40 to 85	16 Ld SOIC	M16.15


NOTES:


1. Extended Processing Flow
2. Refer to military data sheets for complete specifications.

Pinout

 DG441, DG442
 (PDIP, CERDIP, SOIC)
 TOP VIEW


Functional Diagrams

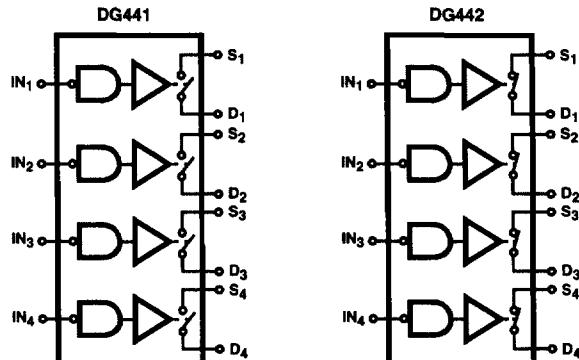

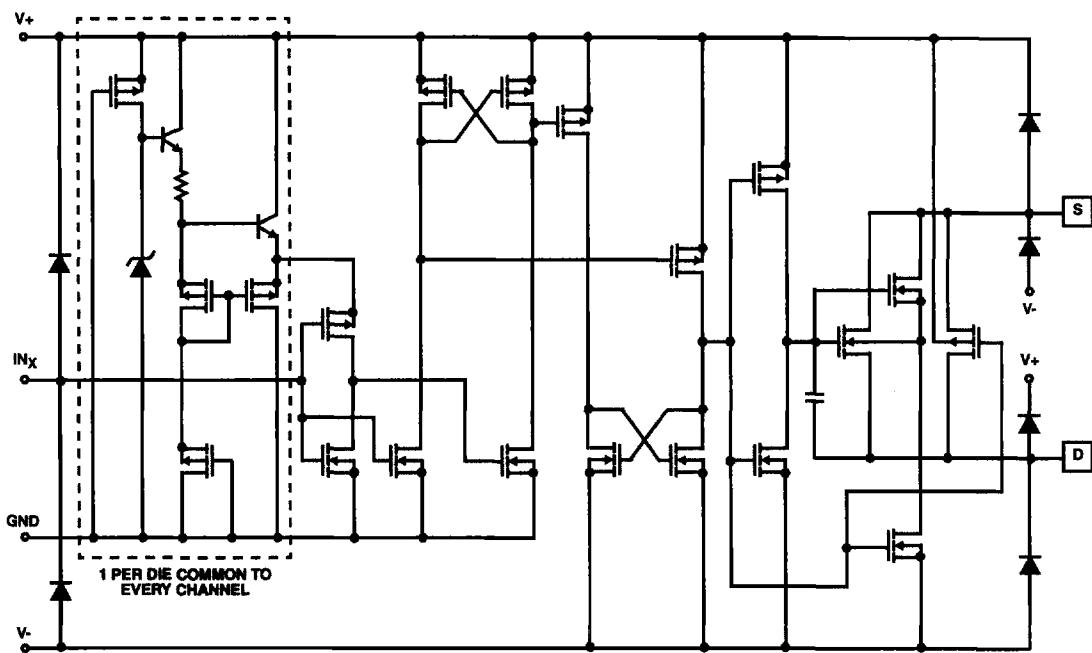Schematic Diagram (One Channel)

Absolute Maximum Ratings

V+ to V-	+44.0V
GND to V-	25V
Digital Inputs (Note 1)	(V-) -2V to (V+) + 2V or 30mA, Whichever Occurs First
Continuous Current, S or D (Note 1)	±30mA
Peak Current, S or D (Note 1) (Pulsed 1ms, 10% Duty Cycle)	±100mA

Operating Conditions

Temperature Range (D Suffix)	-40°C to 85°C
Voltage Range	±20V (Max)
Temperature Range	-55°C to 125°C
Input Low Voltage	0.8V (Max)
Input High Voltage	2.4V (Min)
Input Rise and Fall Time	≤20ns

CAUTION: Stresses above those listed in "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress only rating and operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied.

NOTES:

1. Signals on SX, DX or INX exceeding V+ or V- will be clamped by internal diodes. Limit forward diode current to maximum current ratings.
2. θ_{JA} is measured with the component mounted on an evaluation PC board in free air.

Electrical Specifications (Dual Supply) Test Conditions: V+ = +15V, V- = -15V, V_{IN} = 2.4V, 0.8V, V_{ANALOG} = V_S, V_D. Unless Otherwise Specified

PARAMETER	TEST CONDITIONS	(NOTE 3) TEMP (°C)	D SUFFIX -40°C TO 85°C			UNITS
			MIN	(NOTE 4) TYP	MAX	
DYNAMIC CHARACTERISTICS						
Turn-ON Time, t _{ON}	R _L = 1kΩ, C _L = 35pF, V _S = ±10V, See Figure 18	25	-	150	250	ns
Turn-OFF Time, t _{OFF} DG441		25	-	90	120	ns
			-	110	210	ns
			-	-1	-	pC
Charge Injection, Q	C _L = 1nF, V _S = 0V, V _{GEN} = 0V, R _{GEN} = 0Ω	25	-	-1	-	pC
OFF Isolation	R _L = 50Ω, C _L = 5pF, f = 1MHz	25	-	60	-	dB
Crosstalk (Channel-to-Channel)	R _L = 50Ω, C _L = 5pF, f = 1MHz	25	-	-100	-	dB
Source OFF Capacitance, C _{S(OFF)}	f = 1MHz	25	-	4	-	pF
Drain OFF Capacitance, C _{D(OFF)}	f = 1MHz	25	-	4	-	pF
Channel ON Capacitance, C _{D(ON)} + C _{S(ON)}	V _{ANALOG} = 0	25	-	16	-	pF
ANALOG SWITCH						
Analog Signal Range, V _{ANALOG}		Full	-15	-	15	V
Drain-Source ON Resistance, r _{DS(ON)}	I _S = ±10mA, V _D = ±8.5V, V ₊ = 13.5V, V ₋ = -13.5V	25	-	50	85	Ω
		Hot	-	-	100	Ω
Switch OFF Leakage Current, I _{S(OFF)}	V ₊ = 16.5V, V ₋ = -16.5V, V _D = ±15.5V, V _S = ±15.5V	25	-0.5	0.01	0.5	nA
		Hot	-5	-	5	nA
Switch OFF Leakage Current, I _{D(OFF)}	V ₊ = 16.5V, V ₋ = -16.5V, V _D = ±15.5V, V _S = ±15.5V	25	-0.5	0.01	0.5	nA
		Hot	-5	-	5	nA

DG441, DG442

Electrical Specifications (Dual Supply) Test Conditions: $V_+ = +15V$, $V_- = -15V$, $V_{IN} = 2.4V, 0.8V$, $V_{ANALOG} = V_S$, V_D . Unless Otherwise Specified (Continued)

PARAMETER	TEST CONDITIONS	(NOTE 3) TEMP (°C)	D SUFFIX -40°C TO 85°C			UNITS
			MIN	(NOTE 4) TYP	MAX	
Channel ON Leakage Current, $I_{D(ON)} + I_{S(ON)}$	$V_+ = 16.5V$, $V_- = -16.5V$, $V_S = V_D = \pm 15.5V$	25	-0.5	0.08	0.5	nA
		Hot	-10	-	10	nA
DIGITAL CONTROL						
Input Current V_{IN} Low, I_{IL}	V_{IN} Under Test = 0.8V, All Others = 2.4V	Full	-0.5	-0.00001	0.5	μA
Input Current V_{IN} High, I_{IH}	V_{IN} Under Test = 2.4V, All Others = 0.8V	Full	-0.5	0.00001	0.5	μA
POWER SUPPLIES						
Positive Supply Current, I_+	$V_+ = 16.5V$, $V_- = -16.5V$, $V_{IN} = 0V$ or 5V	Full	-	15	100	μA
Negative Supply Current, I_-		25	-1	-0.0001	-	μA
		Full	-5	-	-	μA
Ground Current, I_{GND}		Full	-100	-15	-	μA

Electrical Specifications (Single Supply) Test Conditions: $V_+ = 12V$, $V_- = 0V$, $V_{IN} = 2.4V, 0.8V$, Unless Otherwise Specified

PARAMETER	TEST CONDITIONS	(NOTE 3) TEMP (°C)	D SUFFIX -40°C TO 85°C			UNITS
			MIN	(NOTE 4) TYP	MAX	
DYNAMIC CHARACTERISTICS						
Turn-ON Time, t_{ON}	$R_L = 1k\Omega$, $C_L = 35pF$, See Test Circuit, $V_S = 8V$	25	-	300	450	ns
Turn-OFF Time, t_{OFF}		25	-	60	200	ns
Charge Injection, Q	$C_L = 1nF$, $V_{GEN} = 6V$, $R_{GEN} = 0\Omega$	25	-	2	-	pC
ANALOG SWITCH						
Analog Signal Range, V_{ANALOG}		Full	0	-	12	V
Drain-Source ON-Resistance, $r_{DS(ON)}$	$I_S = 10mA$, $V_D = 3V, 8V$ $V_+ = 10.8V$	25	-	100	180	Ω
		Full	-	-	200	Ω
POWER SUPPLIES						
Positive Supply Current, I_+	$V_+ = 13.2V$, $V_- = 0V$, $V_{IN} = 0V$ or 5V	Full	-	15	100	μA
Negative Supply Current, I_-		25	-1	-0.0001	-	μA
		Full	-100	-0.0001	-	μA
Ground Current, I_{GND}		Full	-100	-15	-	μA

NOTES:

3. Room: 25°C. Cold: D suffix -40°C. Hot: D suffix 85°C.
4. Typical values are for DESIGN AID ONLY, not guaranteed nor production tested.

Typical Performance Curves

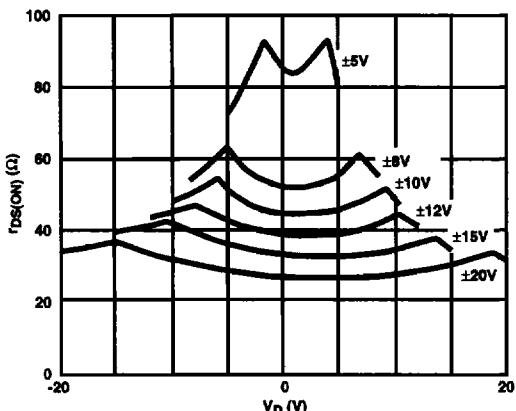


FIGURE 1. $r_{DS(ON)}$ vs V_D AND POWER SUPPLY VOLTAGE

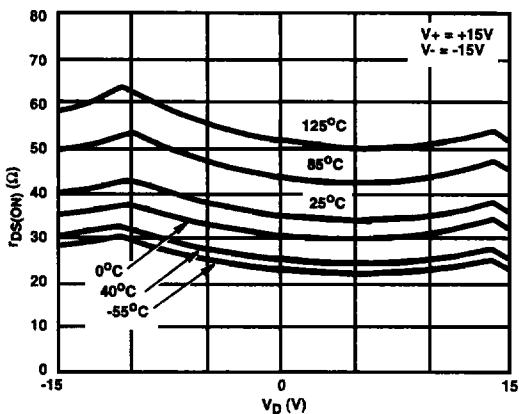


FIGURE 2. $r_{DS(ON)}$ vs V_D AND TEMPERATURE

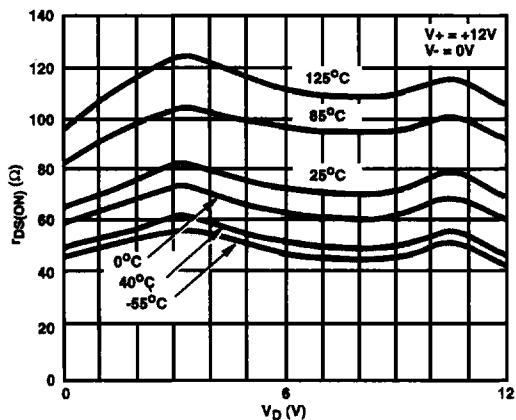


FIGURE 3. $r_{DS(ON)}$ vs V_D AND TEMPERATURE (SINGLE 12V SUPPLY)

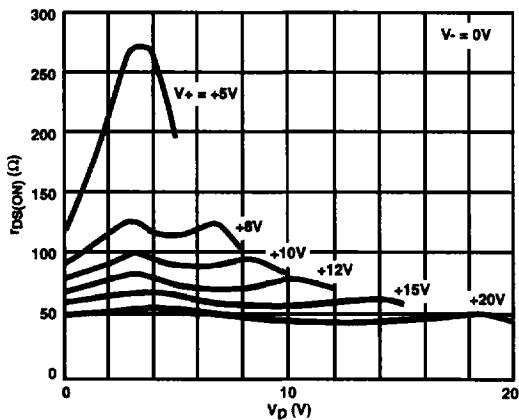


FIGURE 4. $r_{DS(ON)}$ vs V_D AND UNIPOLAR POWER SUPPLY VOLTAGE

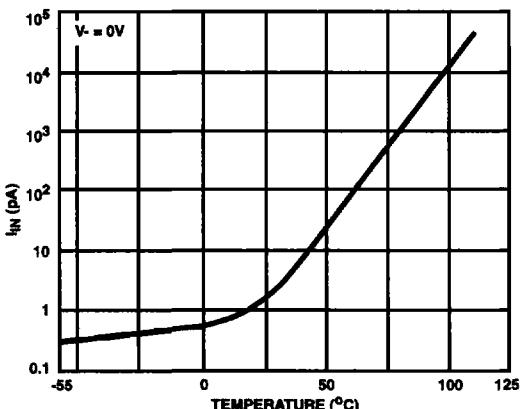


FIGURE 5. INPUT CURRENT vs TEMPERATURE

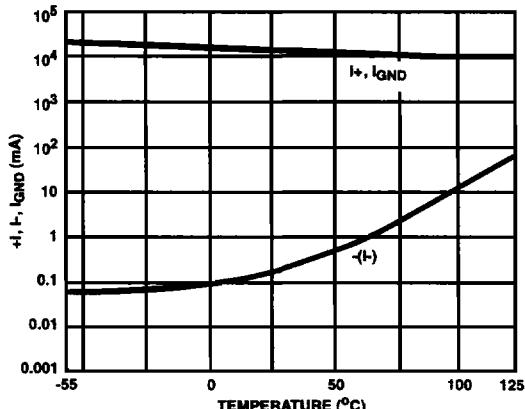
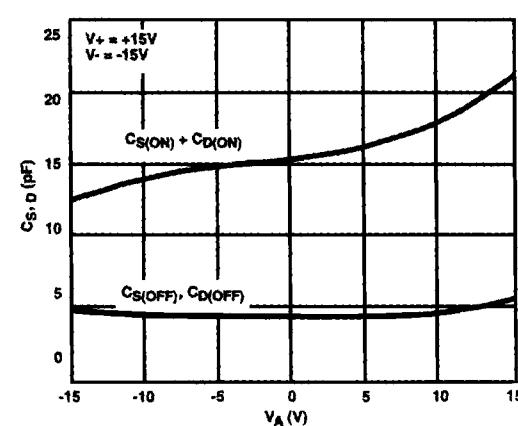
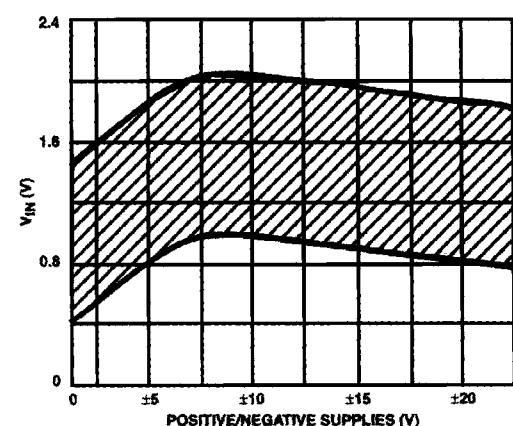
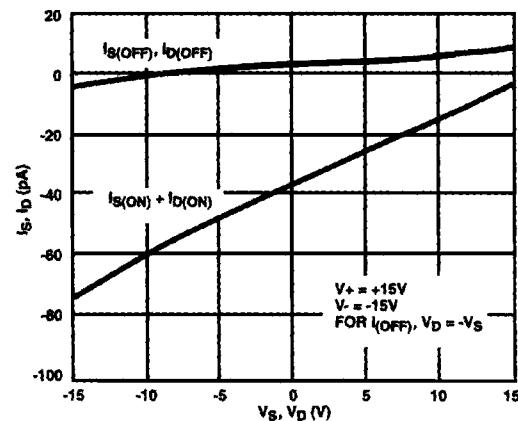
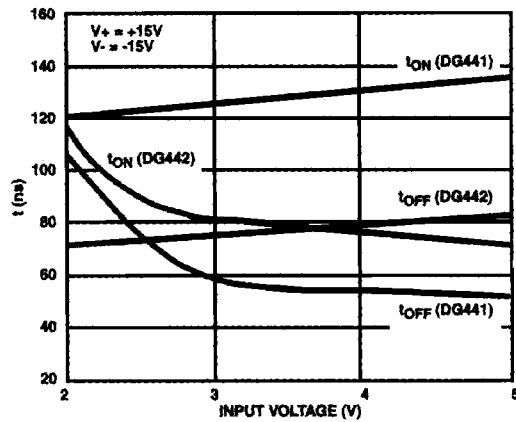
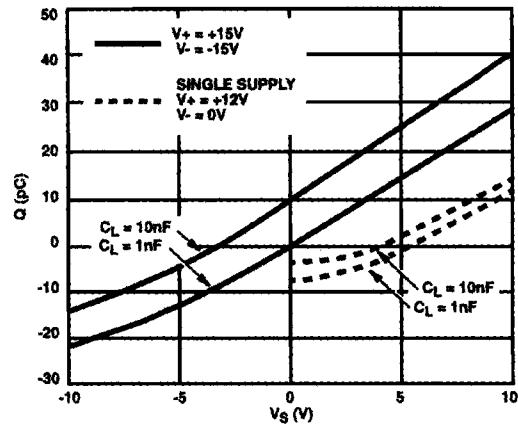
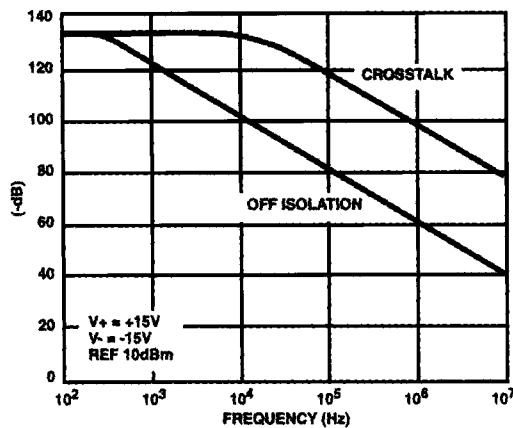


FIGURE 6. SUPPLY CURRENT vs TEMPERATURE

Typical Performance Curves (Continued)

Typical Performance Curves (Continued)

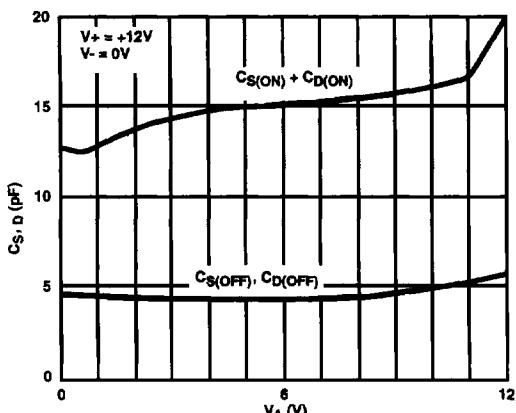


FIGURE 13. SOURCE/DRAIN CAPACITANCE vs ANALOG VOLTAGE (SINGLE 12V SUPPLY)

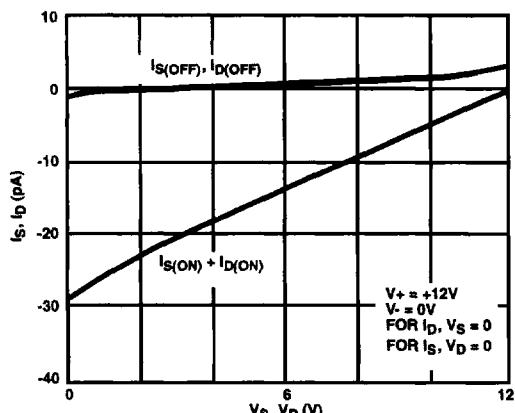


FIGURE 14. SOURCE/DRAIN LEAKAGE CURRENTS (SINGLE 12V SUPPLY)

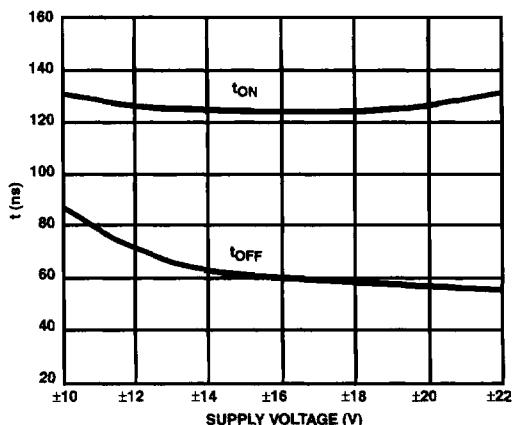


FIGURE 15. SWITCHING TIME vs POWER SUPPLY VOLTAGE (DG441)

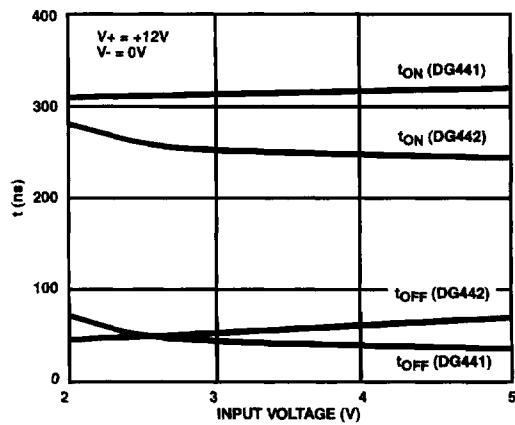


FIGURE 16. SWITCHING TIMES vs INPUT VOLTAGE

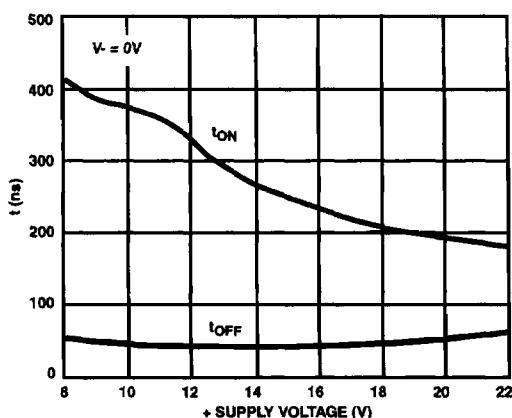


FIGURE 17. SWITCHING TIME vs POWER SUPPLY VOLTAGE (DG441)

Pin Descriptions


PIN	SYMBOL	DESCRIPTION
1	IN ₁	Logic Control for Switch 1
2	D ₁	Drain (Output) Terminal for Switch 1
3	S ₁	Source (Input) Terminal for Switch 1
4	V-	Negative Power Supply Terminal
5	GND	Ground Terminal (Logic Common)
6	S ₄	Source (Input) Terminal for Switch 4
7	D ₄	Drain (Output) Terminal for Switch 4
8	IN ₄	Logic Control for Switch 4
9	IN ₃	Logic Control for Switch 3
10	D ₃	Drain (Output) Terminal for Switch 3
11	S ₃	Source (Input) Terminal for Switch 3
12	NC	No Internal Connection
13	V+	Positive Power Supply Terminal (Substrate)
14	S ₂	Source (Input) Terminal for Switch 2
15	D ₂	Drain (Output) Terminal for Switch 2
16	IN ₂	Logic Control for Switch 2

TRUTH TABLE

LOGIC	V _{IN}	DG441	DG442
0	≤0.8V	ON	OFF
1	≥2.4V	OFF	ON


Test Circuits and Waveforms

V_O is the steady state output with the switch on. Feedthrough via switch capacitance may result in spikes at the leading and trailing edge of the output waveform.

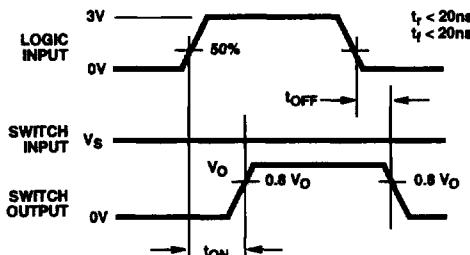

NOTE: Logic input waveform is inverted for switches that have the opposite logic sense.

FIGURE 18A.

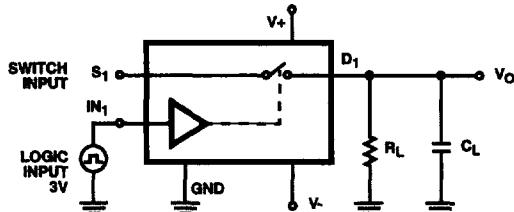

Repeat test for Channels 2, 3 and 4.
For load conditions, see Specifications C_L (includes fixture and stray capacitance).

$$V_O = V_S \frac{R_L}{R_L + r_{DS(ON)}}$$

FIGURE 18B.

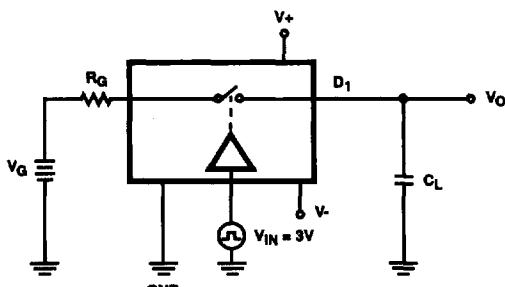
FIGURE 18. SWITCHING TIME

FIGURE 19A.

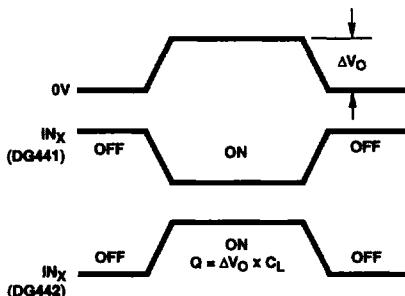


FIGURE 19. CHARGE INJECTION

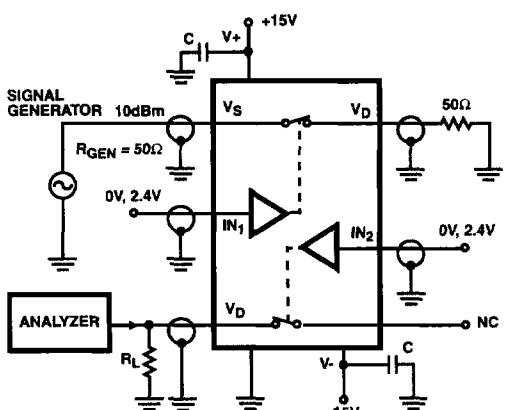
Test Circuits (Continued)

FIGURE 20. CROSSTALK

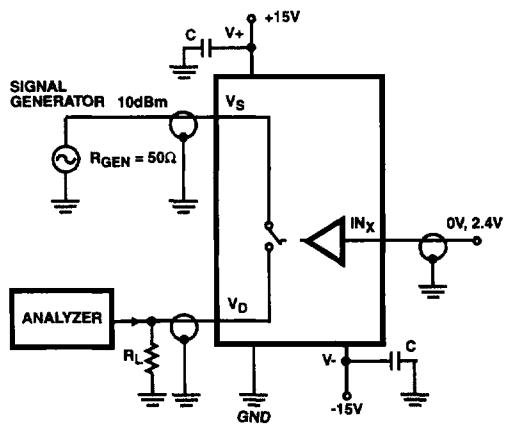


FIGURE 21. OFF ISOLATION


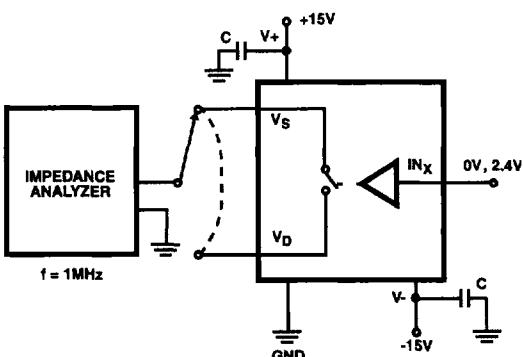


FIGURE 22. SOURCE/DRAIN CAPACITANCES

Applications

GAIN ERROR IS DETERMINED ONLY BY THE RESISTOR TOLERANCE. OP AMP OFFSET AND CMRR WILL LIMIT ACCURACY OF CIRCUIT

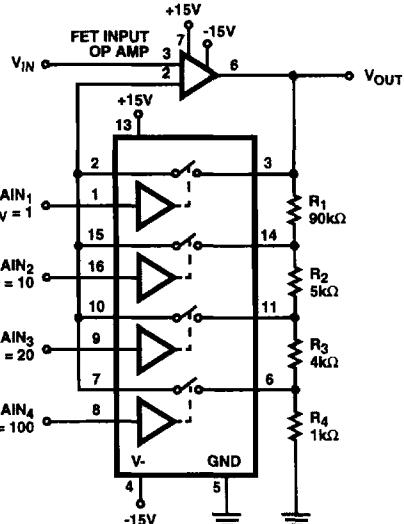

$$\frac{V_{OUT}}{V_{IN}} = \frac{R_1 + R_2 + R_3 + R_4}{R_4} = 100$$

WITH SW4 CLOSED

FIGURE 23. PRECISION WEIGHTED RESISTOR PROGRAMMABLE GAIN AMPLIFIER

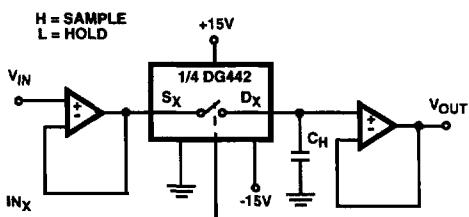


FIGURE 24. OPEN LOOP SAMPLE AND HOLD

Die Characteristics**DIE DIMENSIONS:**2160 μ m x 1760 μ m x 485 μ m \pm 25 μ m**METALLIZATION:**

Type: SiAl

Thickness: 12k \AA \pm 1k \AA **PASSIVATION:**

Type: Nitride

Thickness: 8k \AA \pm 1k \AA **WORST CASE CURRENT DENSITY:**9.1 x 10⁴ A/cm²**Metalization Mask Layout**

DG441, DG442

