


 REVISIONS

 REV
 ECO
 DESCRIPTION
 DATE
 BY
 APPR

 A1
 —
 RELEASE NEW DRAWING
 04/JAN/22
 IAN
 TOMMY

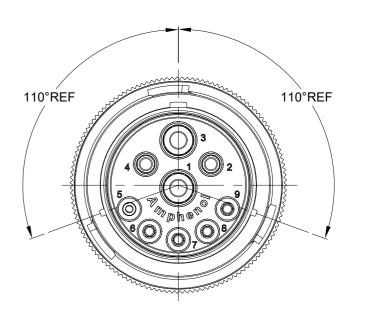

NOTES: UNLESS OTHERWISE SPECIFIED

SIZE 16 CONTACT (5 PLACES)

SIZE 12 CONTACT

(2 PLACES)

1. MATERIAL:

SHELL: ZINC ALLOY, NICKEL PLATED COUPLING RING: ALUMINUM ALLOY, NICKEL PLATED INSERT AND RETAINING RING: THERMOPLASTIC SEAL: SILICONE RUBBER

2. MODIFICATIONS: THREADED HOUSING; NORMAL DIA. WIRE SEAL;

- 3. SPECIFICATIONS:
 - 3.1 OPERATING TEMPERATURE: -55°C TO +125°C.
 - 3.2 DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2 MILLIAMPS CURRENT LEAKAGE @ 1500 VOLTS AC.
 - 3.3 INSULATION RESISTANCE: 1000 MEGOHM MIN @ 25°C.
 - 3.4 MOISTURE RESISTANCE:


IP68(IM OF WATER FOR A PERIOD OF 24 HOURS,MATED CONDITION);

- IP69K(MATED CONDITION).
- 3.5 MATING CYCLE DURABILITY: 100 CYCLES.
- 3.6 RoHS COMPLIANT.
- 4. MATING PART: AHDM04-24-91P* & AHDM07-24-91P* RECEPTACLES (* = SEAL TYPE)

- 5. CONTACTS 4 AND 5 ARE INTERNALLY CONNECTED. (BUILT IN BRIDGE)
- 6. CAVITY 5 IS WITH CONTACT SIZE 16 AND THE GROMMENT IS SEAL
- 7. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.

| CONTACT | MIN. INSUL | MAX. INSUL | TYPICAL WIRE | CURRENT |
|---------|----------------------|----------------------|--------------------------|---------|
| SIZE | O.D. | O.D. | RANGE | RATING |
| 8 | 4.83 mm (.190 in) | 6.10 mm (.240 in) | 8-10AWG (10.0-5.0mm²) | 60AMPS |
| 12 | 3.40 mm (.134 in) | 4.32 mm (.170 in) | 10-14AWG (6.0-2.0mm²) | 25AMPS |
| 16 | 2.54mm (.100 in) | 3.40 mm (.134 in) | 14-20AWG (2.0-0.5mm²) | 13AMPS |

9. MEET THE DIMENSION OF IMPLEMENT BUS BREAKAWAY CONNECTOR OF ISO 11783-2.

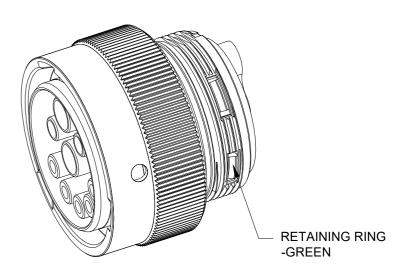

| | AHDM06 | 6-24-91S | N | REF:HD36-24-91SN | | | 1 | | | | |
|--|----------------|--|--|---|---|----------------------------|--------------------|--------------|-------------|---|---|
| QUANTITY | PART N | IUMBER | | DESCRIPTION | | | ITEM |] - | | | |
| | MATERIALS LIST | | | | | | | ┢ | | | |
| | WISE SPECIFIED | SIGN | ATURES | JRES DATE | | Amphanal | | | | | 1 |
| All dimensions a Tolerances are a PL DEC ±0.30 | | DRAWN: | IAN | 04/JAN/22 | Amphenol | | | | | | |
| 2 PL DEC ±0.15 3 PL DEC ±0.08 | Angles ±1° | CHECKED: | SULLEN | 04/JAN/22 | | Sin | e Systems - www.an | nphenol-sine | .com | | |
| 3) Note reference = X | | ENGINEER: | | | 44724 Morley Drive Clinton Township, MI 48036 | | | | | | |
| MATERIAL SPECIFICATIONS: | | APPROVAL: | TOMMY | 05/JAN/22 | Cilition Township, Wi 48030 | | | + | | | |
| | | CUSTOMER: | | | | | OS,PLUG,SO | - , | , | | |
| | | | IIS DRAWING IS SUPPLIED FOR FORMATION ONLY, DESIGN FEATURES. | | | NORMAL SEAL, DURAMATE AHDM | | | | | |
| PROCESS SPECIFICATIONS: | | SPECIFICATIO SHOWN HERE THE AMPHENO OF REPRODUC | NS AND PERFOR | ERFORMANCE DATA LE PROPERTY OF B TYPE DWG NO: AHDM06-24-91SN AHDM06-24-91SN | | 3N | A1 | | | | |
| | | | ING VARIATIONS | S. | SCALE: N | ONE | DURAMATE | SHEET | 1 OF | 1 | |

A Series™ - Contact Size 8 Options (Works with: ATHD and DuraMate Series)

| Machined Contacts, Pins and Sockets | | | | | | |
|-------------------------------------|--|------|------|----------|------|--|
| Part Number | Description | Size | AWG | Туре | Amps | |
| AT60-204-08141 | Male Contact - Pin, Copper Alloy, Nickel-Plated | 8 | 8-10 | Machined | 60A | |
| AT62-203-08141 | Female Contact - Socket, Copper Alloy, Nickel-Plated | 8 | 8-10 | Machined | 60A | |
| AT60-204-08141-16 | Male Contact - Pin, Copper Alloy, Nickel-Plated | 8 | 6 | Machined | 60A | |
| AT62-203-08141-16 | Female Contact - Socket, Copper Alloy, Nickel-Plated | 8 | 6 | Machined | 60A | |

| | Tooling - Machined Contacts | | | | | |
|---|---|--|--|--|--|--|
| Part Number | Description | | | | | |
| Heavy Duty Pneumatic Crimp Tool WA23 -Uses Universal Positioner Part No. WA23-101DA and Crimp Locator MFX-3961 | | | | | | |
| WA23-2 Die Assembly -for CA-5E12 Heavy Duty Pneumatic Crimp Tool, Size 8 | | | | | | |
| WA23-3 | Die Assembly -for CA-5E12 Heavy Duty Pneumatic Crimp Tool, Size 6 | | | | | |
| WA23-10 | Contact Locator, Size 6 and Size 8 | | | | | |
| 96-978-22 | Crimper and Dies -for Size 10mm ² -185mm ² Wires | | | | | |
| AT114008 | Contact Removal Tool, Plastic, Size 8, 8-10AWG | | | | | |

A Series™ - Contact Size 12 Options (Works with: AHD-6, ATP, ATHD, DuraMate and PanelMate Series)

| Machined Contacts, Sockets & Pins | | | | | | |
|-----------------------------------|--|------|-------|----------|--|--|
| Part Number | Description | Size | AWG | Туре | | |
| *AT60-204-12141-10 | Male Contact - Pin, Nickel-plated | 12 | 10-12 | Machined | | |
| *AT62-203-12141-10 | Female Contact - Socket, Nickel-plated | 12 | 10-12 | Machined | | |
| AT60-220-1231 | Male Contact - Pin, Gold-plated | 12 | 12-14 | Machined | | |
| AT62-210-1231 | Female Contact - Socket, Gold-plated | 12 | 12-14 | Machined | | |
| AT60-204-12141 | Male Contact - Pin, Nickel-plated | 12 | 12-14 | Machined | | |
| AT62-203-12141 | Female Contact - Socket, Nickel-plated | 12 | 12-14 | Machined | | |

^{*}Works with ATP Series only

| | DiagnosticGrade™ Machined Contacts, Sockets & Pins • Smaller AWG for Diagnostic Applications • Gold-plated • Increased Mating Cycles • Cost-effective | | | | | | | |
|---|---|---|------|-----|----------|--|--|--|
| | Part Number | Description | Size | AWG | Туре | | | |
| Γ | 65-54749 | Male Contact - DiagnosticGrade™, Pin, Gold-plated | 12 | 20 | Machined | | | |
| | AT62-210-1231-1820 | Female Contact - DiagnosticGrade™, Socket, Gold-plated | 12 | 20 | Machined | | | |

| | Tooling - Machined Contacts | | | | | |
|-------------|---|--|--|--|--|--|
| Part Number | Description | | | | | |
| AUTK-12 | Hand Crimp Tool, Size 12 | | | | | |
| AUTK-100 | AUTK-100 Universal Heavy Duty Contact Crimping Tool Kit, Size 12/16/20 | | | | | |
| CA-5D12 | CA-5D12 Universal Hand Crimp Tool, Size 12/16/20 | | | | | |
| CA-5E12 | Pneumatic Crimp Tool, Size 12/16/20 | | | | | |
| M300-25A | M300-25A Hand Crimp Tool used with Crimp Locator MFX-3966, Size 12, 10AWG | | | | | |
| MFX-3966 | MFX-3966 Contact Locator used with Hand Crimp Tool M300-25A, Size 12, 10AWG | | | | | |

| Cor | Contact Removal Tools (For both Machined or Stamped & Formed Contacts) | | | | | | |
|--|--|--|--|--|--|--|--|
| Part Number Description | | | | | | | |
| ATRT-100 Contact and Wedgelock Extraction Tool | | | | | | | |
| AT11-337-1205 | Contact Removal Tool, Plastic, Size 12 | | | | | | |

| | Sealing Plugs (For both Machined or Stamped & Formed Contacts) | | | | | |
|-------------------------|--|--|--|--|--|--|
| Part Number Description | | | | | | |
| A114017 | Sealing Plug, Size 12, White | | | | | |

| Stamped & Formed Contacts, Sockets & Pins | | | | | | |
|---|--|------|-------|------------------|--|--|
| Part Number | Description | Size | AWG | Туре | | |
| AT60-12-0244 | Male Contact - Pin, Gold-plated | 12 | 10-12 | Stamped & Formed | | |
| AT62-12-0244 | Female Contact - Socket, Gold-plated | 12 | 10-12 | Stamped & Formed | | |
| AT60-12-0222 | Male Contact - Pin, Nickel-plated | 12 | 10-12 | Stamped & Formed | | |
| AT62-12-0222 | Female Contact - Socket, Nickel-plated | 12 | 10-12 | Stamped & Formed | | |
| AT60-12-0144 | Male Contact - Pin, Gold-plated | 12 | 12-14 | Stamped & Formed | | |
| AT62-12-0144 | Female Contact - Socket, Gold-plated | 12 | 12-14 | Stamped & Formed | | |
| AT60-12-0166 | Male Contact - Pin, Nickel-plated | 12 | 12-14 | Stamped & Formed | | |
| AT62-12-0166 | Female Contact - Socket, Nickel-plated | 12 | 12-14 | Stamped & Formed | | |

| | Tooling - Stamped & Formed Contacts | | | | | |
|-------------------------|---|--|--|--|--|--|
| Part Number Description | | | | | | |
| MFX-3973 | Crimp Die - Size 12 | | | | | |
| MFX-3985 | Crimp Die - Svize 12, 10-12AWG -02XX Series | | | | | |
| ATT-12-00 | Hand Crimp Tool - Size 12, 12AWG | | | | | |
| ATT-12-01 | Hand Crimp Tool - Size 12, 10AWG | | | | | |

A Series™ - Contact Size 16 Options (Works with: AT, ATV, AHD-9, ARC, DuraMate and PanelMate Series)

| | Machined Contacts, Sockets & Pins | | | |
|-------------------|--|------|-------|----------|
| Part Number | Description | Size | AWG | Туре |
| AT60-215-1631 | Male Contact - Pin, Gold-plated | 16 | 14 | Machined |
| AT62-209-1631 | Female Contact - Socket, Gold-plated | 16 | 14 | Machined |
| AT60-215-16141 | Male Contact - Pin, Nickel-plated | 16 | 14 | Machined |
| AT62-209-16141 | Female Contact - Socket, Nickel-plated | 16 | 14 | Machined |
| AT60-202-1631 | Male Contact - Pin, Gold-plated | 16 | 16-20 | Machined |
| AT62-201-1631 | Female Contact - Socket, Gold-plated | 16 | 16-20 | Machined |
| AT60-202-16141 | Male Contact - Pin, Nickel-plated | 16 | 16-20 | Machined |
| AT62-201-16141 | Female Contact - Socket, Nickel-plated | 16 | 16-20 | Machined |
| AT60-202-1631-22 | Male Contact - Pin, Gold-plated | 16 | 22-24 | Machined |
| AT62-201-1631-22 | Female Contact - Socket, Gold-plated | 16 | 22-24 | Machined |
| AT60-202-16141-22 | Male Contact - Pin, Nickel-plated | 16 | 22-24 | Machined |
| AT62-201-16141-22 | Female Contact - Socket, Nickel-plated | 16 | 22-24 | Machined |

| Tooling - Machined Contacts | | |
|-----------------------------|---|--|
| Part Number | Description | |
| AUTK-16 | Hand Crimp Tool, Size 16 | |
| AUTK-100 | Universal Heavy Duty Contact Crimping Tool Kit, Size 12/16/20 | |
| CA-5D12 | Universal Hand Crimp Tool, Size 12/16/20 | |
| CA-5E12 | Pneumatic Crimp Tool, Size 12/16/20 | |

| Contact Removal Tools (For both Machined or Stamped & Formed Contacts) | | |
|--|--|--|
| Part Number | Description | |
| ATRT-100 | Contact and Wedgelock Extraction Tool | |
| AT11-310-1605 | Contact Removal Tool, Plastic, Size 16 | |

| Sealing Plugs (For both Machined or Stamped & Formed Contacts) | | |
|--|---|--|
| Part Number | Description | |
| A114017 | Sealing Plug, Size 16, White | |
| A114017-SR | Sealing Plug, Size 16, SR01 Series, Black | |
| AT13-217-1605 | Locking Sealing Plug, Size 16, Grey | |
| AT13-217-1605-SR | Locking Sealing Plug, Size 16, SR01 Series, Red | |

| Stamped & Formed Contacts, Sockets & Pins | | | | |
|---|--|---|---|--|
| Description | Size | AWG | Туре | |
| Male Contact - Pin, Nickel-plated | 16 | 14-18 | Stamped & Formed | |
| Female Contact - Socket, Nickel-plated | 16 | 14-18 | Stamped & Formed | |
| Male Contact - Pin, Gold-plated | 16 | 14-18 | Stamped & Formed | |
| Female Contact - Socket, Gold-plated | 16 | 14-18 | Stamped & Formed | |
| Male Contact - Pin, Nickel-plated | 16 | 16-18 | Stamped & Formed | |
| Female Contact - Socket, Nickel-plated | 16 | 16-18 | Stamped & Formed | |
| Male Contact - Pin, Gold-plated | 16 | 16-18 | Stamped & Formed | |
| Female Contact - Socket, Gold-plated | 16 | 16-18 | Stamped & Formed | |
| Male Contact - Pin, Nickel-plated | 16 | 16-20 | Stamped & Formed | |
| Female Contact - Socket, Nickel-plated | 16 | 16-20 | Stamped & Formed | |
| Male Contact - Pin, Gold-plated | 16 | 16-20 | Stamped & Formed | |
| Female Contact - Socket, Gold-plated | 16 | 16-20 | Stamped & Formed | |
| Male Contact - Pin, Tin-plated | 16 | 16-20 | Stamped & Formed | |
| Female Contact - Socket, Tin-plated | 16 | 16-20 | Stamped & Formed | |
| Male Contact - Pin, Nickel-plated | 16 | 20-22 | Stamped & Formed | |
| Female Contact - Socket, Nickel-plated | 16 | 20-22 | Stamped & Formed | |
| Male Contact - Pin, Gold-plated | 16 | 20-22 | Stamped & Formed | |
| Female Contact - Socket, Gold-plated | 16 | 20-22 | Stamped & Formed | |
| | Description Male Contact - Pin, Nickel-plated Female Contact - Socket, Nickel-plated Male Contact - Pin, Gold-plated Female Contact - Socket, Gold-plated Male Contact - Pin, Nickel-plated Male Contact - Pin, Nickel-plated Male Contact - Socket, Nickel-plated Male Contact - Socket, Nickel-plated Male Contact - Socket, Gold-plated Female Contact - Socket, Gold-plated Male Contact - Pin, Nickel-plated Female Contact - Socket, Nickel-plated Male Contact - Pin, Gold-plated Female Contact - Socket, Gold-plated Male Contact - Pin, Tin-plated Female Contact - Pin, Tin-plated Male Contact - Pin, Nickel-plated Male Contact - Pin, Gold-plated | DescriptionSizeMale Contact - Pin, Nickel-plated16Female Contact - Socket, Nickel-plated16Male Contact - Pin, Gold-plated16Female Contact - Socket, Gold-plated16Male Contact - Pin, Nickel-plated16Female Contact - Pin, Nickel-plated16Male Contact - Pin, Gold-plated16Female Contact - Pin, Gold-plated16Male Contact - Pin, Mickel-plated16Female Contact - Socket, Gold-plated16Female Contact - Pin, Nickel-plated16Male Contact - Pin, Gold-plated16Female Contact - Socket, Gold-plated16Male Contact - Pin, Tin-plated16Female Contact - Pin, Tin-plated16Male Contact - Pin, Nickel-plated16Male Contact - Pin, Nickel-plated16Female Contact - Socket, Nickel-plated16Male Contact - Pin, Nickel-plated16Male Contact - Pin, Nickel-plated16Male Contact - Pin, Gold-plated16 | DescriptionSizeAWGMale Contact - Pin, Nickel-plated1614-18Female Contact - Socket, Nickel-plated1614-18Male Contact - Pin, Gold-plated1614-18Female Contact - Socket, Gold-plated1614-18Male Contact - Pin, Nickel-plated1616-18Female Contact - Socket, Nickel-plated1616-18Male Contact - Pin, Gold-plated1616-18Female Contact - Socket, Gold-plated1616-18Male Contact - Pin, Nickel-plated1616-20Female Contact - Socket, Nickel-plated1616-20Male Contact - Pin, Gold-plated1616-20Female Contact - Socket, Gold-plated1616-20Male Contact - Pin, Tin-plated1616-20Female Contact - Pin, Tin-plated1616-20Male Contact - Pin, Nickel-plated1616-20Male Contact - Socket, Tin-plated1616-20Male Contact - Pin, Nickel-plated1620-22Female Contact - Socket, Nickel-plated1620-22Male Contact - Pin, Gold-plated1620-22 | |

| Tooling - Stamped & Formed Contacts | | |
|-------------------------------------|-------------------------------------|--|
| MFX-3950 | Crimp Die - Size 16, 18-20AWG | |
| MFX-3953 | Crimp Die - Size 16, 16-18AWG | |
| MFX-3975 | Crimp Die - Size 16, 14-16AWG | |
| MFX-3990 | Crimp Die - Size 16, 20-22AWG | |
| ATT-16-00 | Hand Crimp Tool - Size 16, 14-16AWG | |
| ATT-16-01 | Hand Crimp Tool - Size 16, 18-20AWG | |
| ATT-1612-03 | Hand Crimp Tool - Size 16, 20-22AWG | |