


GRACE INERTIA 9.0 TE Internal #: 1903414-1 Rectangular Power Connectors, Housing, Plug, Wire-to-Board, 3 Position, 9 mm [.354 in] Centerline, Wire & Cable, UL 94V-0, GRACE INERTIA 9.0

### View on TE.com >



Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors > Glow Wire GRACE INERTIA Plug

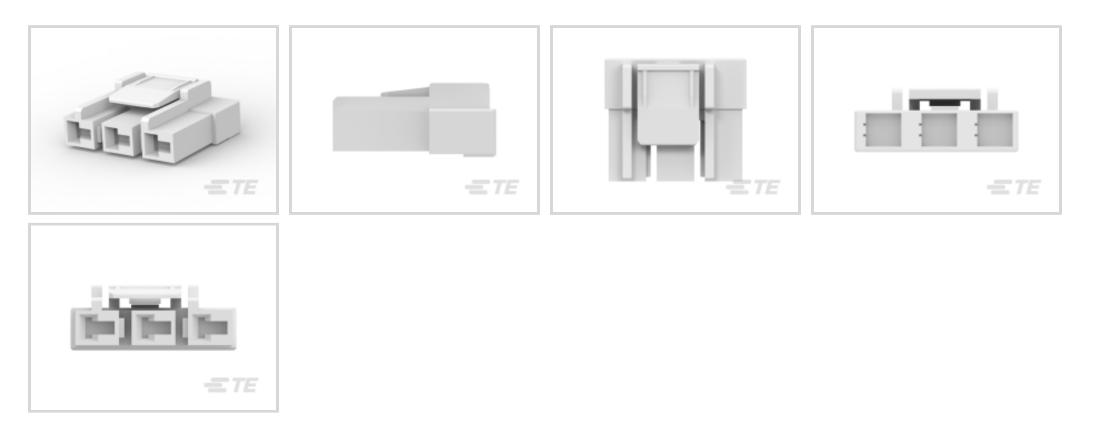

Rectangular Power Connector Type: Housing

Connector & Housing Type: Plug

Connector System: Wire-to-Board

Number of Positions: 3

Centerline (Pitch): 9 mm [.354 in ]

### All Glow Wire GRACE INERTIA Plug (78)

## Features

### **Product Type Features**

Rectangular Power Connector Type	Housing
Connector & Housing Type	Plug
Connector System	Wire-to-Board
Sealable	No
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Number of Positions	3
Number of Power Positions	3
Number of Signal Positions	0
Number of Rows	1
Electrical Characteristics	
Operating Voltage	600 VDC

Rectangular Power Connectors, Housing, Plug, Wire-to-Board, 3 Position, 9 mm [.354 in] Centerline, Wire & Cable, UL 94V-0, GRACE INERTIA 9.0



### **Contact Features**

Contact Layout	Inline
Contact Mating Area Plating Material	Tin
Contact Base Material	Copper Alloy
Contact Current Rating (Max)	20 A
Contact Retention Within Housing	With
Contact Type	Receptacle
Contact Mating Area Plating Material Thickness	.8 μm[31.5 μin]
Termination Features	
Termination Method to Wire & Cable	Crimp
Mechanical Attachment	
Strain Relief	Without
Mating Alignment Type	Polarization
Mating Retention	With
Mating Alignment	With
Panel Mount Feature	Without
PCB Mount Retention	Without
Mating Retention Type	Latch, Locking Latch
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Centerline (Pitch)	9 mm[.354 in]
Housing Color	Natural
Housing Material	Nylon 6/6 GF
Dimensions	
Connector Height	10.4 mm[.41 in]
Product Length	26.4 mm[1.038 in]
Wire Size	2427 – 7144 CMA
Usage Conditions	
Operating Temperature Range	-40 – 105 °C[-40 – 221 °F]
Operation/Application	
Circuit Application	Power
Industry Standards	

**C** For support call+1 800 522 6752

Rectangular Power Connectors, Housing, Plug, Wire-to-Board, 3 Position, 9 mm [.354 in] Centerline, Wire & Cable, UL 94V-0, GRACE INERTIA 9.0



UL Flammability Rating	UL 94V-0
Glow Wire Rating	GWT 750°C (Without Flame)
Packaging Features	
Packaging Quantity	100
Packaging Method	Bag
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


## **Compatible Parts**

Rectangular Power Connectors, Housing, Plug, Wire-to-Board, 3 Position, 9 mm [.354 in] Centerline, Wire & Cable, UL 94V-0, GRACE INERTIA 9.0






# Also in the Series | GRACE INERTIA 9.0

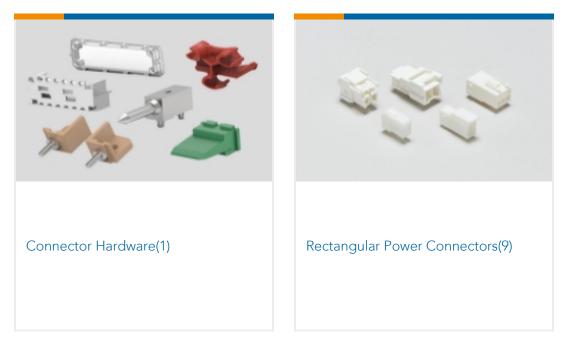

# Customers Also Bought










TE Part #2-1376383-3<br/>5MM B-T-W CONN. 3P HDR ASSEMBLTE Part #1376383-1<br/>5mm B-T-W Conn. 3P HDR ASSEMBLTE Part #1903391-1<br/>GIC 2.5 W CAP HSG 2P NATURALTE Part #1747995-2<br/>GHC EYELET 6.2 3POS PLUG<br/>HOUSING RED



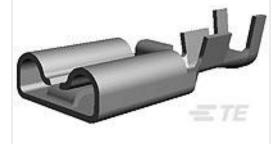





TE Part #179973-1 250 PL EX REC. 22-18AWG PTBR

TE Part #175020-1 250 PL EX REC. 22-18AWG PTBR TE Part #1554296-1 GI CONN 2.5 PLUG HSG 5P LEVER SPECIAL TE Part #1747995-3 GHC EYELET 6.2 3POS PLUG HOUSING BLUE



TE Part #1747995-1 GHC EYELET 6.2 3POS PLUG HOUSING NATURAL

Rectangular Power Connectors, Housing, Plug, Wire-to-Board, 3 Position, 9 mm [.354 in] Centerline, Wire & Cable, UL 94V-0, GRACE INERTIA 9.0



### Documents

**Product Drawings** GHC 9.0 3POS PLUG HSG

English

### **CAD** Files

3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_1903414-1\_K.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_1903414-1\_K.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_1903414-1\_K.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use

## Datasheets & Catalog Pages

1-1773883-5 GRACE INERTIA connector quick reference guide

English

**Product Specifications** Application Specification

English