

### MQS

TE Internal #: 2-1355132-1 Automotive Connector Caps & Covers, Cover - Cable Exit, Black, PA GF, -40 – 248 °F [-40 – 120 °C], MQS

### View on TE.com >



Connectors > Automotive Connectors > Automotive Connector Accessories > Automotive Connector Caps & Covers



Protection & Strain Relief Accessory Type: Cover - Cable Exit

Strain Relief: Without

Primary Product Color: Black

Primary Product Material: PA GF

Operating Temperature (Max): 70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C [ 158 °F, 167 °F, 176 °F, 185 °F, 194 °

F, 212 °F, 221 °F, 230 °F, 248 °F ]

## Features

## **Product Type Features**

| Protection & Strain Relief Accessory Type | Cover - Cable Exit  |
|---|---|
| Body Features                             |   |
| Primary Product Color                     | Black   |
| Primary Product Material                  | PAGF  |
| Mechanical Attachment                     |   |
| Strain Relief                             | Without   |
| Usage Conditions                          |   |
| Operating Temperature (Max)               | 70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C,<br>105 °C, 110 °C, 120 °C[158 °F][167 °F][176 °<br>F][185 °F][194 °F][212 °F][221 °F][230 °F][248<br>°F] |
| Operating Temperature Range               | -40 – 120 °C[-40 – 248 °F]  |
| Industry Standards                        |   |
| UL Flammability Rating                    | UL 94HB   |
|   |   |

## 2-1355132-1

Automotive Connector Caps & Covers, Cover - Cable Exit, Black, PA GF, -40 – 248 °F [-40 – 120 °C], MQS



### **Packaging Features**

| Packaging Method | Box |
|------------------|-----|
| Other            |     |
| Serviceable      | Yes |

## **Product Compliance**

#### For compliance documentation, visit the product page on TE.com>

| EU RoHS Directive 2011/65/EU                  | Compliant   |
|---|---|
| EU ELV Directive 2000/53/EC                   | Compliant   |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold   |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JUNE 2023<br>(235)<br>Candidate List Declared Against: JUNE<br>2023 (235)<br>Does not contain REACH SVHC |
| Halogen Content                               | Low Halogen - Br, Cl, F, I < 900 ppm per<br>homogenous material. Also BFR/CFR/PVC<br>Free   |
| Solder Process Capability                     | Not applicable for solder process capability  |

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

## **Compatible Parts**




## 2-1355132-1

Automotive Connector Caps & Covers, Cover - Cable Exit, Black, PA GF, -40 – 248 °F [-40 – 120 °C], MQS




## Also in the Series | MQS

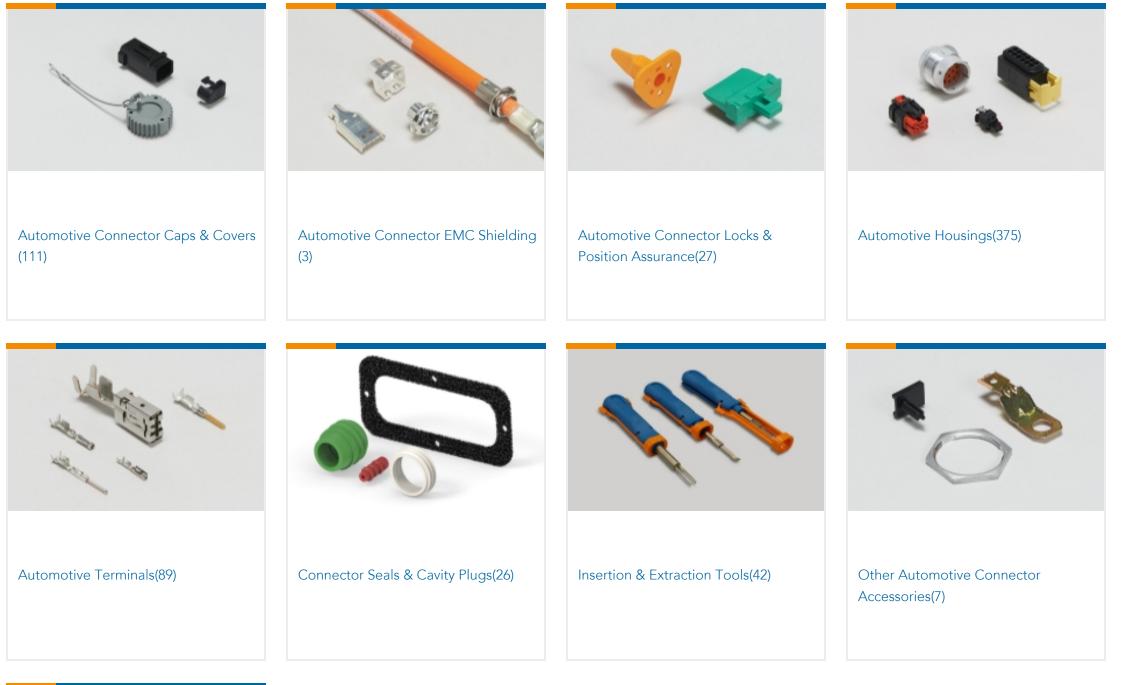



PCB Headers & Receptacles(143)

# Customers Also Bought

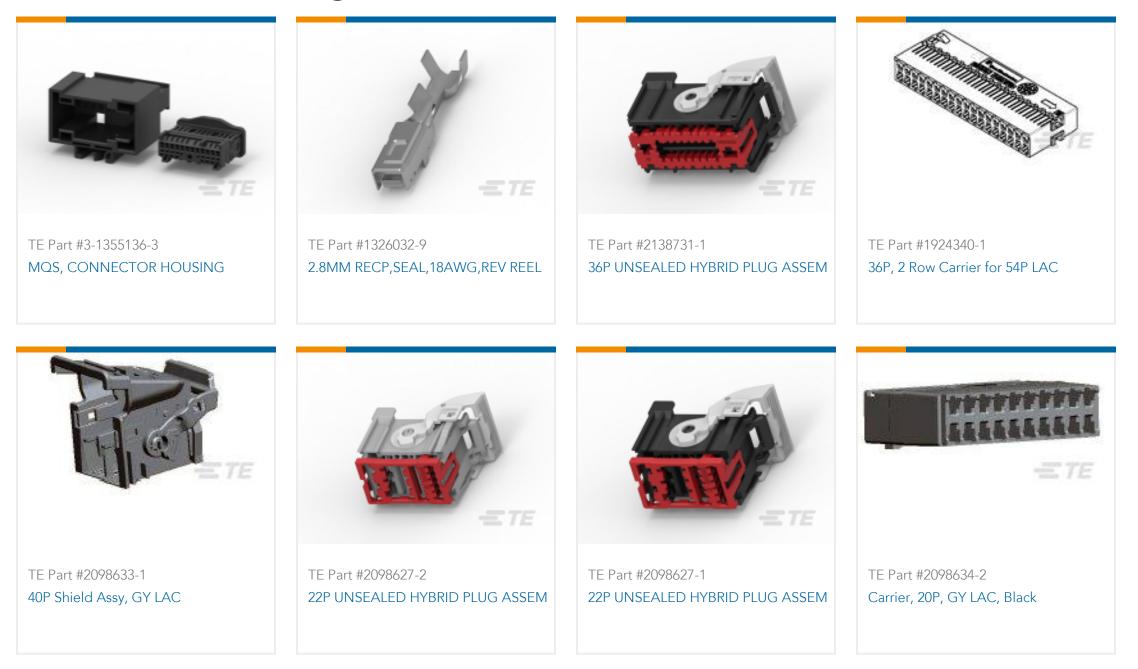

## 2-1355132-1

Automotive Connector Caps & Covers, Cover - Cable Exit, Black, PA GF, -40 – 248 °F [-40 – 120 °C], MQS



## Documents

Product Drawings COVER 94POS

English

## **CAD** Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_2-1355132-1\_A.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_2-1355132-1\_A.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_2-1355132-1\_A.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.