


Buchanan

TE Internal #: 1-1986711-7 PCB Terminal Blocks, Header, Wire-to-Board, 17 Position, .197 in [5 mm] Centerline, 2 Row, 90° Wire Entry Angle, 30 – 12 AWG Wire Size

View on TE.com >

Connectors > Terminal Blocks & Strips > PCB Terminal Blocks

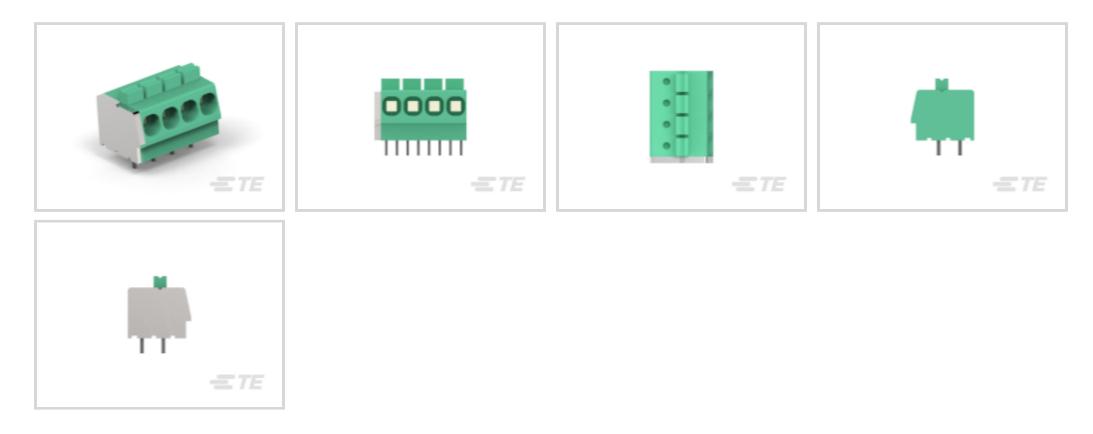

Terminal Block Connector Type: Header

Connector System: Wire-to-Board

Number of Positions: **17**

Centerline (Pitch): 5 mm [.197 in]

Number of Rows: 2

Features



Product Type Features

Wire Protection	With
Terminal Block Connector Type	Header
Connector System	Wire-to-Board
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
Wire Entry Location	Side
Stacking Configuration	Side Stackable
Number of Positions	17
Number of Rows	2
Wire Entry Angle	90°
Electrical Characteristics	
Operating Voltage	300 VAC
Body Features	
Lever Color	White

C For support call+1 800 522 6752

1-1986711-7

PCB Terminal Blocks, Header, Wire-to-Board, 17 Position, .197 in [5 mm] Centerline, 2 Row, 90° Wire Entry Angle, 30 – 12 AWG Wire Size



Green
Vertical
3.5 mm[.138 in]
Tin
Copper Alloy
16 A
3.5 mm[.138 in]
3.5 mm[.138 in] Through Hole - Solder
Through Hole - Solder
Through Hole - Solder
Through Hole - Solder Push-in
Through Hole - Solder Push-in

Dimensions

Wire Size	.05 – 3 mm²
Usage Conditions	
Operating Temperature Range	-40 – 110 °C[-40 – 230 °F]
Operation/Application	
Circuit Application	Power & Signal
Packaging Features	
Packaging Quantity	50
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235)

PCB Terminal Blocks, Header, Wire-to-Board, 17 Position, .197 in [5 mm] Centerline, 2 Row, 90° Wire Entry Angle, 30 – 12 AWG Wire Size



Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Halogen Content

Solder Process Capability

Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



Customers Also Bought



Documents

Product Drawings SCREWLESS, SW,17P,5.0 PCB

English

1-1986711-7

PCB Terminal Blocks, Header, Wire-to-Board, 17 Position, .197 in [5 mm] Centerline, 2 Row, 90° Wire Entry Angle, 30 – 12 AWG Wire Size



CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1-1986711-7_C.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1-1986711-7_C.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1-1986711-7_C.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Agency Approvals VDE Certificate

English