

# EPM25-2V 40 W

## 40 Watt isolated DC-DC converter



### Product features

- 40 Watt isolated DC-DC converter
- Input voltage: 9 Vdc - 36 Vdc  
18 Vdc - 75 Vdc
- 2.0" x 1.0 " package
- Efficiency up to 92%
- Isolation voltage: 1.6 kVdc
- EMI class A without external circuit
- Operating ambient temperature from -40 °C to +105 °C
- No minimum load required
- EN62368-1/ IEC62368-1 certified
- Remote On/OFF


### Applications

- Computing/telecom
- Distributed power architectures
- Servers and workstations
- LAN /WAN applications
- Data processing applications
- Industrial IoT equipment, sensors
- Power supply, battery backup
- Wireless TX/RX modules
- Renewable energy products

### Environmental compliance



### Ordering part number

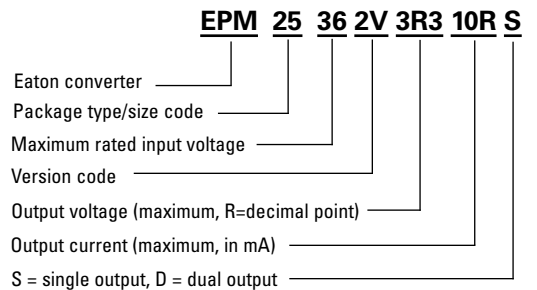

Powering Business Worldwide

## Specifications

	Parameter	Conditions	Minimum	Typical	Maximum	Unit	
<b>Input</b>	Input filter			Pi type			
	Input voltage range	V <sub>in</sub> = 24 Vdc	9		36	Vdc	
		V <sub>in</sub> = 48 Vdc	18		75	Vdc	
	Input current @ no load				15	mA	
	Start-up time	100% Load at Nominal V <sub>in</sub>			40	ms	
	Start-up voltage	V <sub>in</sub> = 24 Vdc			9	Vdc	
		V <sub>in</sub> = 48 Vdc			18	Vdc	
	UVLO	V <sub>in</sub> = 24 Vdc		8		Vdc	
		V <sub>in</sub> = 48 Vdc		16		Vdc	
	Input surge voltage (0.1 s max.)	V <sub>in</sub> = 24 Vdc			50	Vdc	
V <sub>in</sub> = 48 Vdc				100	Vdc		
Remote ON/OFF	DC-DC ON			Open or 3 V - 12 Vdc			
	DC-DC OFF			Short or 0 V - 1.2 Vdc			
<b>Output</b>	Efficiency			Selection guide			
	Minimum load		0			%	
	Line regulation	Single output		-0.2		+0.2	%
		Dual output		-0.5		+0.5	%
	Load regulation (10-100% Load)	Single output		-0.5		+0.5	%
		Dual output		-1.0		+1.0	%
	Cross regulation		-5		+5	%	
	Voltage accuracy		-1		+1	%	
	Operating frequency	100% Load at Nominal V <sub>in</sub>		250			kHz
	Ripple & noise <sup>1</sup>	V <sub>out</sub> = 3.3, 5 Vdc				100	mVp-p
V <sub>out</sub> = 12, 15, ±12, ±15 Vdc					125	mVp-p	
Voltage adjustability			-10		+10	%	
Transient response recovery time	25% load step change (75%-100% load)			500		µs	
<b>Environment</b>	Operating temperature (with derating)		-40		+105	°C	
	Storage temperature		-55		+125	°C	
	Max. case temperature				+110	°C	
	Temperature coefficient		-0.05		+0.05	%/°C	
	Relative humidity		5		95	%RH	
	Vibration				MIL-STD-202G		

## Specifications

	Parameter	Conditions	Minimum	Typical	Maximum	Unit	
<b>Function</b>	Isolation voltage 1 min., Input to Output		1.6			kVdc	
	Isolation resistance		1000			MΩ	
	Isolation capacitance			1500		pF	
	MTBF (MIL-HDBK-217F)	25 °C		779		khours	
	Short circuit protection		Continuous, automatic recovery				
	Overload protection			175		%	
	Over voltage protection Zener diode clamp	Vout = 3.3 Vdc		3.7		5.3	Vdc
		Vout = 5 Vdc		5.6		8.0	Vdc
		Vout = 12 Vdc		13.4		19.2	Vdc
		Vout = 15 Vdc		16.8		24.0	Vdc
		Vout = ±12 Vdc		±13.4		±19.2	Vdc
		Vout = ±15 Vdc		±16.8		±24.0	Vdc
	Over temperature protection			+115		°C	
Certification			EN62368-1/ IEC62368-1				
<b>Physical</b>	Dimension		2.00 x 1.00 x 0.413 inch				
	Weight		37.6 g				
	Case material		metal case				
	Base material		FR4 PCB				
	Potting material		Silicone				
<b>EMC</b>	EMI	EN 55032	Class A without external circuit, Class B with external circuit				
	ESD	IEC 61000-4-2 Air ± 8 kV; Contact ± 6 kV	Criteria A				
	RS <sup>2</sup>	IEC 61000-4-3, 20 V/m	Criteria A				
	EFT <sup>2</sup>	IEC 61000-4-4, ± 2 kV	Criteria A				
	Surge <sup>2</sup>	IEC 61000-4-5, ± 2 kV	Criteria A				
	CS <sup>2</sup>	IEC 61000-4-6, 10 Vrms	Criteria A				
	PFMF	IEC 61000-4-8, 10 A/m	Criteria A				

1. The ripple & noise are measured with 1 µF capacitor at 20 MHz BW.
2. Test with E-CAP 680 µF/100 V at input terminal.
3. All specifications valid at nominal input, full load and +25 °C after warm-up time unless otherwise stated.
4. The product information and specifications are subject to change without prior notice.

### Selection guide


Part number	Input voltage (Vdc)	Output voltage (Vdc)	Output current @ full load (mA)	Efficiency <sup>1</sup> minimum	Efficiency <sup>1</sup> typical	Capacitive load <sup>2</sup> maximum (μF)
EPM25362V-3R3-10RS	9-36 Nominal 24	3.3	10000	88%	89%	26600
EPM25362V-05R-8R0S	9-36 Nominal 24	5	8000	89%	90%	20000
EPM25362V-12R-3R3S	9-36 Nominal 24	12	3333	91%	92%	3900
EPM25362V-15R-2R6S	9-36 Nominal 24	15	2666	91%	92%	2600
EPM25362V-12R-1R6D	9-36 Nominal 24	±12	±1666	89%	90%	±2600
EPM25362V-15R-1R3D	9-36 Nominal 24	±15	±1333	89%	90%	±1600
EPM25752V-3R3-10RS	18-75 Nominal 48	3.3	10000	88%	89%	26600
EPM25752V-05R-8R0S	18-75 Nominal 48	5	8000	89%	90%	20000
EPM25752V-12R-3R3S	18-75 Nominal 48	12	3333	91%	92%	3900
EPM25752V-15R-2R6S	18-75 Nominal 48	15	2666	91%	92%	2600
EPM25752V-12R-1R6D	18-75 Nominal 48	±12	±1666	89%	90%	±2600
EPM25752V-15R-1R3D	18-75 Nominal 48	±15	±1333	89%	90%	±1600

1. Efficiency is nominal input voltage and full load @ +25 °C.


2. Capacitive load is tested at minimum input voltage and a constant resistive load.

3. All specifications valid at nominal input voltage, full load and +25 °C after warm-up time unless otherwise stated.

### Measure method

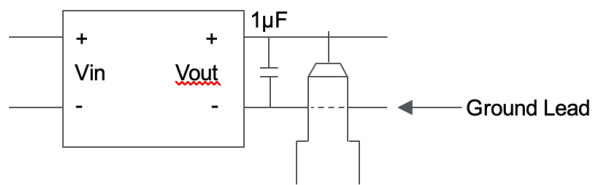


### Derating curve

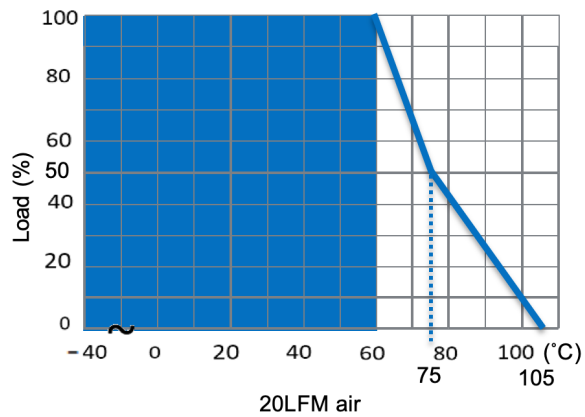

## Application information

### Single external output voltage trimming

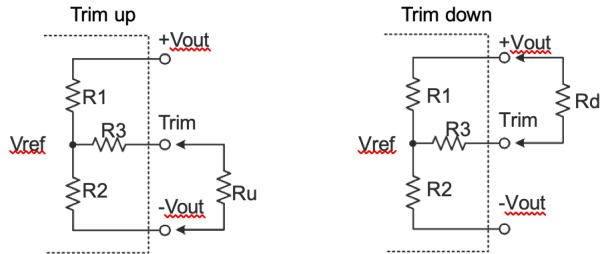

Formula for trim resistor:

$$\text{UP: } R_u = \frac{aR_2}{R_2 - a} - R_3 \quad a = \frac{V_{ref}}{V_0' - V_{ref}} \cdot R_1$$

$$\text{DOWN: } R_d = \frac{bR_1}{R_1 - b} - R_3 \quad b = \frac{V_0' - V_{ref}}{V_{ref}} \cdot R_2$$

1.  $R_u$ ,  $R_d$  is mean trim resistor, please check the formula.
2.  $a$  &  $b$ : user define parameter, no actual meanings.
3.  $V_0'$  is mean trim up/down voltage.
4. Value for  $R_1$ ,  $R_2$ ,  $R_3$  and  $V_{ref}$  Refer to the table below.

Output voltage	R1	R2	R3	Vref
3.3 V	8.5 kΩ	5.1 kΩ	27 kΩ	1.24 V
5 V	15.47 kΩ	5.1 kΩ	33 kΩ	1.24 V
12 V	12.62 kΩ	3.3 kΩ	22 kΩ	2.5 V
15 V	15.1 kΩ	3 kΩ	22 kΩ	2.5 V

### Trim up

#### 3R3-10RS

trim (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	3.333	3.366	3.399	3.432	3.465	3.498	3.531	3.564	3.597	3.63
Ru (kΩ)	373.25	150.64	87.15	57.1	39.57	28.09	19.98	13.96	9.3	5.6

#### 05R-8R0S

trim (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	5.05	5.1	5.15	5.2	5.25	5.3	5.35	5.4	5.45	5.5
Ru (kΩ)	361.17	161.42	96.03	63.56	44.14	31.23	22.02	15.12	9.76	5.47

#### 12R-3R3S

trim (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	12.12	12.24	12.36	12.48	12.6	12.72	12.84	12.96	13.08	13.2
Ru (kΩ)	509.2	153.87	83.38	53.23	36.49	25.85	18.48	13.08	8.95	5.69

#### 15R-2R6S

trim (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	15.15	15.3	15.45	15.6	15.75	15.9	16.05	16.2	16.35	16.5
Ru (kΩ)	544.25	152.23	80.95	51.06	34.63	24.22	17.05	11.81	7.8	4.65

### Trim down

#### 3R3-10RS

trim (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	3.267	3.234	3.201	3.168	3.135	3.102	3.069	3.036	3.003	2.97
Rd (kΩ)	407.36	206.24	130.75	91.18	66.83	50.33	38.41	29.4	22.35	16.68

#### 05R-8R0S

trim (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	4.95	4.9	4.85	4.8	4.75	4.7	4.65	4.6	4.55	4.5
Rd (kΩ)	1085.06	525.75	336.03	240.54	183.05	144.63	117.15	96.52	80.45	67.6

#### 12R-3R3S

trim (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	11.88	11.76	11.64	11.52	11.4	11.28	11.16	11.04	10.92	10.8
Rd (kΩ)	633.44	366.75	252.24	188.56	148.02	119.95	99.35	83.6	71.16	61.09

#### 15R-2R6S


trim (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	14.85	14.7	14.55	14.4	14.25	14.1	13.95	13.8	13.65	13.5
Rd (kΩ)	777.22	458.57	319.17	240.96	190.91	156.13	130.55	110.96	95.46	82.91

**CTRL pin setting**

Remote ON/OFF	DC-DC ON	Open or 3 - 12 Vdc
	DC-DC OFF	Short or 0 - 1.2 Vdc

If not using CTRL function, leave CTRL pin floating.


If using CTRL pin to control module to turn on and off; use either external circuit as shown below.

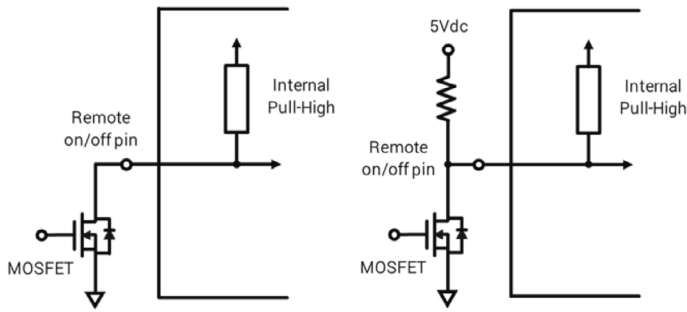

**EMC filtering circuit**


■ Single

■ Dual

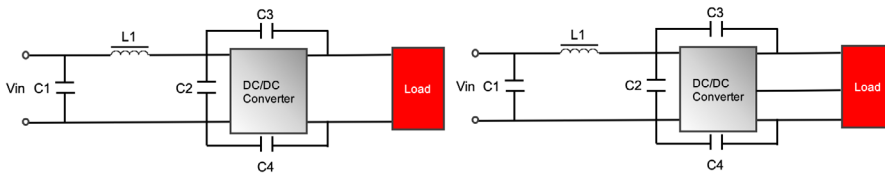

Class B	C1	L1	C2	C3	C4
24 Vin	10 $\mu$ F	1.5 $\mu$ H	10 $\mu$ F	2200 pF	2200 pF
48 Vin	4.7 $\mu$ F	3.3 $\mu$ H	4.7 $\mu$ F	2200 pF	2200 pF


**Packaging- Inches**

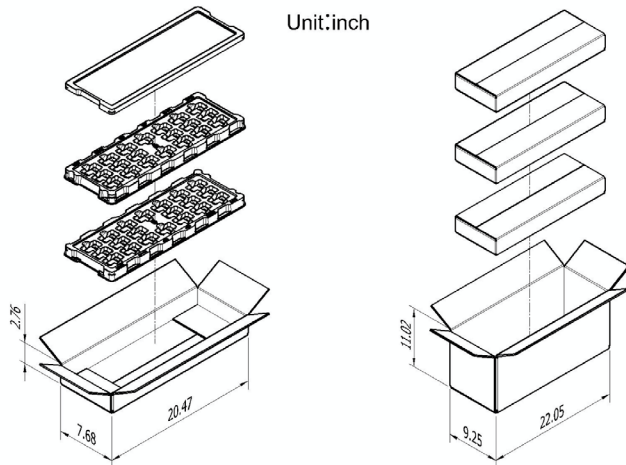


Box accommodates  
2 tray 40 converters per box

Carton accommodates  
3 boxes 120 converters per carton

**Dimensions - inches**

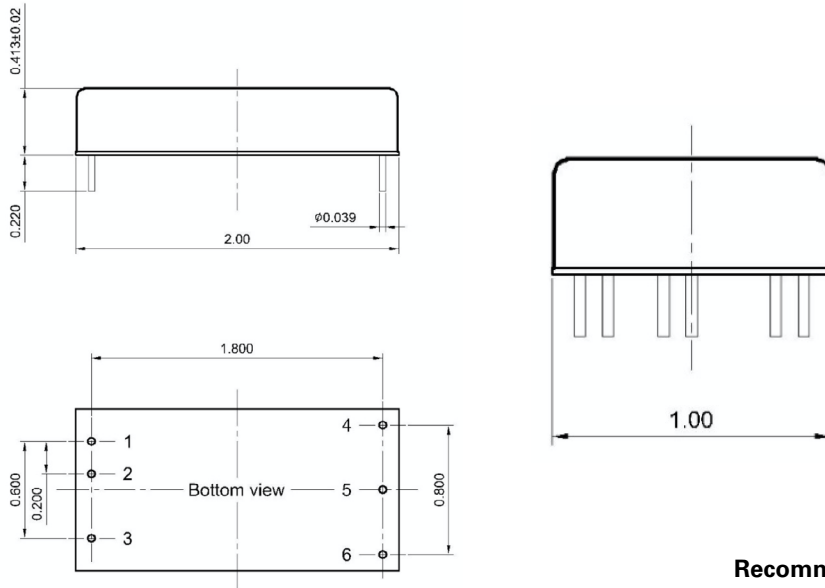

**Recommended PCB layout**

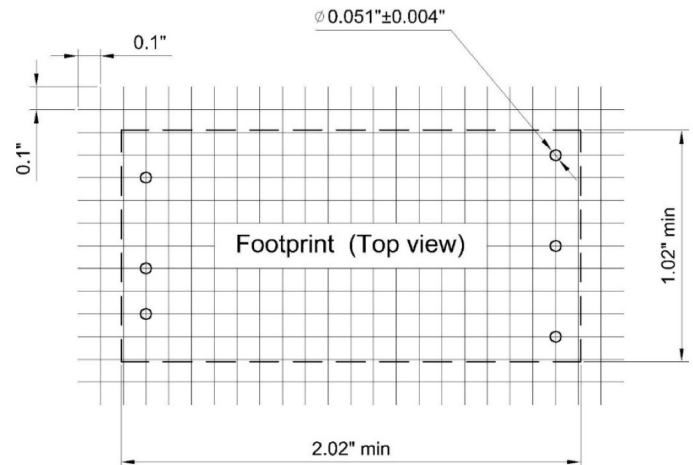

Pin	Single	Dual
1	+Vin	+Vin
2	-Vin	-Vin
3	CTRL	CTRL
4	+Vout	+Vout
5	-Vout	Common
6	Trim	-Vout

Unit: inch  
PIN tolerance:  $\pm 0.004$   
Tolerance: X.XX  $\pm 0.02$  X.XXX  $\pm 0.015$

**Marking**



WLY = lot code




## General information

### Storage and handling

The shelf life will be a minimum of 36 months, when stored at the following conditions: < +40 °C, < 90% RH.

### Wave solder profile

The wave solder profile is measured based on lead temperature. The recommended PCB pre-heat temperature is +80 °C to +100 °C, and the preheat rate of 1.5 to 2.5 °C/sec. The underside PCB temperature at the last pre-heat zone should be approximately +150 °C. The internal temperature of the solder parts should not exceed +210 °C. The duration of solder dwell time should be between 3 to 5 seconds, and not to exceed 10 seconds at a temperature of +260 °C maximum.

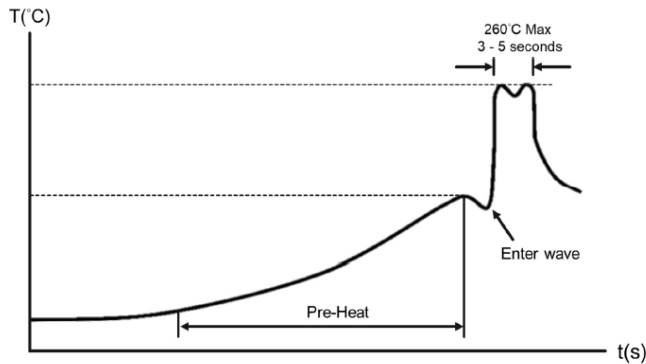

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

**Eaton**  
**Electronics Division**  
1000 Eaton Boulevard  
Cleveland, OH 44122  
United States  
Eaton.com/electronics

© 2022 Eaton  
All Rights Reserved  
Printed in USA  
Publication No. ELX1167 BU-ELX22026  
March 2022

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

Follow us on social media to get the latest product and support information.

