

SSV66A-1G SERIES

VERTICAL SWITCHES G1" MOUNT



Top mount level switch with G1" (1"BSP) thread, enables this switch can be fitted to a tank through a G1" boss, without requiring access to the inside of the tank.

The DIN 43650 (EN 175301-803-A) connector makes for easy connection.

The switch action may be reversed by removing the float, inverting and refitting it.

Features

- External mount via G1" (1"BSP) thread
- 20bar max working pressure
- Reversible switch action
- DIN 43650 (EN 175301-803-A) connector



Technical

Mounting Style	External		
Mounting Thread	1"BSP		
Float & Stem Material	316 grade SS		
Maximum Temperature	-20 to +120°C		
Maximum Pressure	20 bar		
Float SG	0.7		
Minimum Fluid SG	0.75		
Connection	DIN 43650 Plug (EN 175301-803-A)		

A suitable sealing ring/washer should be used to ensure a good seal.

Electrical


Contact Form		N/O (N/C)
Switching Power Max	VA	50
Switching Voltage AC Max	V	300
Switching Voltage DC Max	V	300
Switching Current Max	А	0.5

All ratings are for resistive load only.

STANDARD PARTS


	Material	Switch level	Switch Action	Max Power	Connection
SSV66A100E1GP	SS 316	100mm	Make on rise	50VA	DIN 43650 (EN 175301-803-A)
SSV66A150E1GP	SS 316	150mm	Make on rise	50VA	DIN 43650 (EN 175301-803-A)
SSV66A200E1GP	SS 316	200mm	Make on rise	50VA	DIN 43650 (EN 175301-803-A)

Custom versions can be made for particular applications. Please contact Sensata with your requirements.





All dimensions are in millimeters.

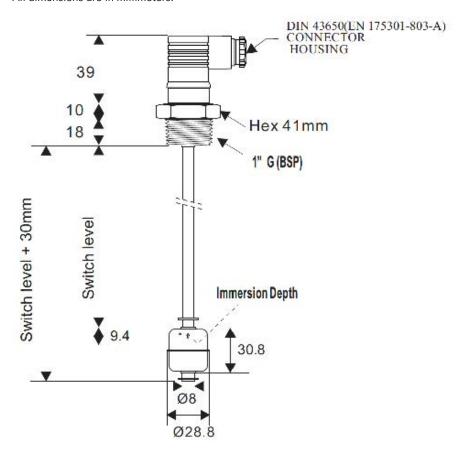

Made in the UK

Datasheets provided by Sensata Technologies, Inc., its subsidiaries and/or affiliates ("Sensata") are solely intended to assist third parties ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, valuation, and judgment in designing Buyer's systems and products. Sensata datasheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular datasheet. Sensata may make corrections, enhancements, improvements, and other changes to its datasheets or components without notice. Buyers are authorized to use Sensata datasheets with the Sensata component(s) identified in each particular datasheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATASHEETS ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATASHEETS OR USE OF THE DATASHEETS, EXPRESS, IMPLIED, OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATASHEETS OR USE THEREOF.

All products are sold subject to Sensata's terms and conditions of sale supplied at www.sensata.com. SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY, AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA

CONTACT US

+44 (0)1202 897969 support@sensata.com Cynergy3 Components Ltd. 7 Cobham Road, Ferndown Industrial Estate, Wimborne, Dorset, BH21 7PE, United Kingdom