


## AMP | AMP Type III+ TE Internal #: 66565-7 Socket Contact, Tin, Size 16 Contact Size, 24 – 20 AWG Wire Size, . 2 – .6 mm<sup>2</sup> Wire Size, Crimp, Brass, Power & Signal, AMP Type III+ View on TE.com >



Connectors > Contacts > Connector Contacts > Pin and Socket Contacts, Type III, LP

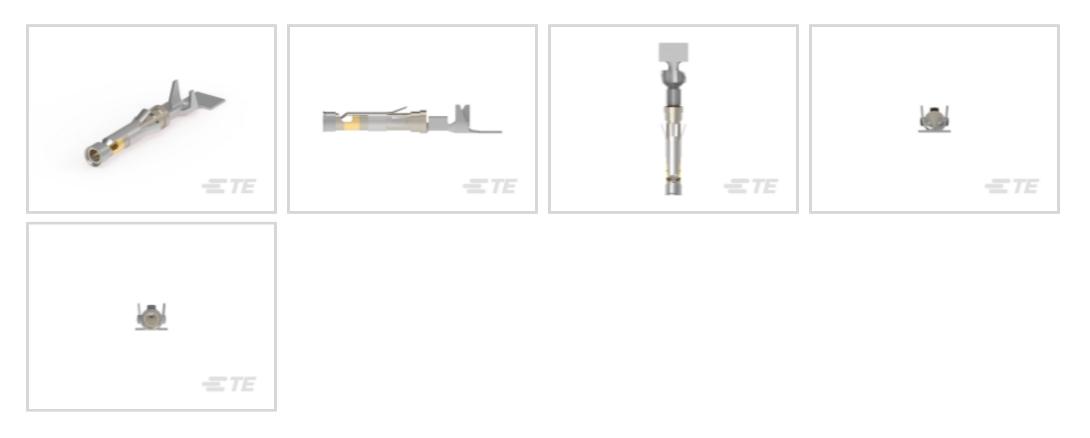

Contact Type: Socket

Contact Mating Area Plating Material: Tin

Wire Contact Termination Area Plating Material: Tin

Contact Retention Within Housing: With

Contact Size: Size 16

## All Pin and Socket Contacts, Type III, LP (53)

## Features

#### **Contact Features**

Mating Pin Diameter	1.57 mm[.062 in]
Contact Underplating Material Thickness	.76 μm[30 μin]
Wire Contact Termination Area Plating Thickness	2.54 μm[100 μin]
Wire Contact Termination Area Plating Material Finish	Bright
Contact Mating Area Plating Material Thickness	2.54 μm[100 μin]
Contact Mating Area Plating Material Finish	Bright
Contact Orientation	Straight
Contact Underplating Material	Nickel
Barrel Type	Open
Contact Type	Socket
Contact Mating Area Plating Material	Tin
Wire Contact Termination Area Plating Material	Tin
Contact Retention Within Housing	With

Socket Contact, Tin, Size 16 Contact Size, 24 – 20 AWG Wire Size, .2 – .6 mm<sup>2</sup> Wire Size, Crimp, Brass, Power & Signal, AMP Type III+



Contact Size	Size 16
	512E TO
Contact Base Material	Brass
Contact Current Rating (Max)	13 A
Termination Features	
Termination Method to Wire & Cable	Crimp
Product Terminates To	Wire & Cable
Mechanical Attachment	
Wire Insulation Support	With
Dimensions	
Compatible Insulation Diameter Range	1.52 – 3.05 mm[.06 – .12 in]
Wire Size	.2 – .6 mm <sup>2</sup>
Usage Conditions	
Operating Temperature Range	-55 – 90 °C[-67 – 194 °F]
Operation/Application	
Circuit Application	Power & Signal
Packaging Features	
Packaging Quantity	1000

Packaging Method

Carton

## Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

Socket Contact, Tin, Size 16 Contact Size, 24 – 20 AWG Wire Size, .2 – .6 mm<sup>2</sup> Wire Size, Crimp, Brass, Power & Signal, AMP Type III+



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

# **Compatible Parts**



TE Part # CAT-AM71-C83998C Circular Plastic Connector, CMC Series

1



TE Part # CAT-AM71-C83998Y One-Piece Connector, Sealed, CPC Series 1



TE Part # CAT-AM71-C83998J Cable/Panel Mount Connector, CPC Series 1



TE Part # CAT-AM71-C83998K Circular Connector, Environmentally Sealed, CPC Series 6










# Also in the Series | AMP Type III+

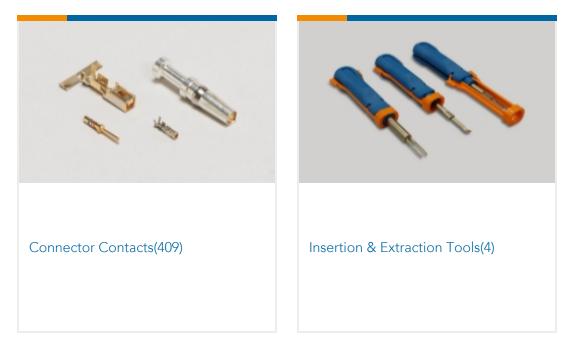

## **Customers Also Bought**

Socket Contact, Tin, Size 16 Contact Size, 24 – 20 AWG Wire Size, .2 – .6 mm<sup>2</sup> Wire Size, Crimp, Brass, Power & Signal, AMP Type III+







## Documents

Product Drawings III+ SKT,24-20,TIN,LP

English

CAD Files Customer View Model ENG\_CVM\_CVM\_66565-7\_H.2d\_dxf.zip

English

3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_66565-7\_H.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_66565-7\_H.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

## Datasheets & Catalog Pages

AMP Circular Connectors for Commercial Signal & Power Applications

English

Signal Contacts

English

#### M\_SERIES\_PIN\_AND\_SOCKET\_CONNECTORS

English

AMP Circular Connectors for Commercial Signal & Power Applications Continued

English

Socket Contact, Tin, Size 16 Contact Size, 24 – 20 AWG Wire Size, .2 – .6 mm² Wire Size, Crimp, Brass, Power & Signal, AMP Type III+



Product Specifications Application Specification

English