

#### AMP | AMP MCP 2.8, AMP MCP Connector System

TE Internal #: 5-968973-1 Housing for Female Terminals, Wire-to-Wire, 15 Position, .197 in [5 mm] Centerline, Violet, Signal, Cable Mount (Free-Hanging), Hybrid View on TE.com >



Connectors > Automotive Connectors > Automotive Housings > AMP MCP Unsealed Connector Housings



Connector System: Wire-to-Wire

Number of Positions: 15

Connector & Housing Type: Housing for Female Terminals

Centerline (Pitch): 5 mm [.197 in ]

Sealable: No

#### All AMP MCP Unsealed Connector Housings (191)

# Features

### Product Type Features

Mixed & Hybrid Connector	No		
Connector Shape	Rectangular		
Connector System	Wire-to-Wire		
Connector & Housing Type	Housing for Female Terminals		
Sealable	No		
Primary Locking Feature	On the Terminal		
Configuration Features			
Number of Positions	15		
Number of Rows	3		
Electrical Characteristics			
Operating Voltage	28 VDC		
Nominal Voltage Architecture	12 V, 24 V		
Body Features			

Housing for Female Terminals, Wire-to-Wire, 15 Position, .197 in [5 mm] Centerline, Violet, Signal, Cable Mount (Free-Hanging), Hybrid



Cable Exit Angle	180°
Primary Product Color	Violet
Connector & Keying Code	D
Contact Features	
Contact Size	2.8mm
Contact Type	Receptacle
Mating Tab Width	2.8 mm[.11 in]
Mechanical Attachment	
Terminal Position Assurance	Yes
Strain Relief	Without
Mating Alignment Type	Keyed
Mating Alignment Type	Keyed
Mating Alignment Type Mating Alignment	Keyed With
Mating Alignment Type Mating Alignment Connector Mounting Type	Keyed With

#### Dimensions

Connector Height	24 mm[.945 in]			
Product Width	31 mm[1.22 in]			
Product Length	31 mm[1.22 in]			
Row-to-Row Spacing	5.5 mm[.217 in]			
Usage Conditions				
Operating Temperature (Max)	70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C[158 °F][167 °F][176 ° F][185 °F][194 °F][212 °F][221 °F][230 °F][248 °F]			
Operating Temperature Range	-40 - 120 °C[-40 - 248 °F]			
Operating Temperature Range Operation/Application	-40 – 120 °C[-40 – 248 °F]			
	-40 – 120 °C[-40 – 248 °F] Signal			
Operation/Application				
Operation/Application Circuit Application				
Operation/Application Circuit Application Packaging Features	Signal			
Operation/Application Circuit Application Packaging Features Packaging Quantity	Signal 1200			

**C** For support call+1 800 522 6752

Housing for Female Terminals, Wire-to-Wire, 15 Position, .197 in [5 mm] Centerline, Violet, Signal, Cable Mount (Free-Hanging), Hybrid



Serviceable	No
Connector Position Assurance Capable	No
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.
	other sources.

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**




Housing for Female Terminals, Wire-to-Wire, 15 Position, .197 in [5 mm] Centerline, Violet, Signal, Cable Mount (Free-Hanging), Hybrid






TE Part # 4-966140-6 TAB HEADER2,8X0,8MM 21POS

# Also in the Series | AMP MCP 2.8

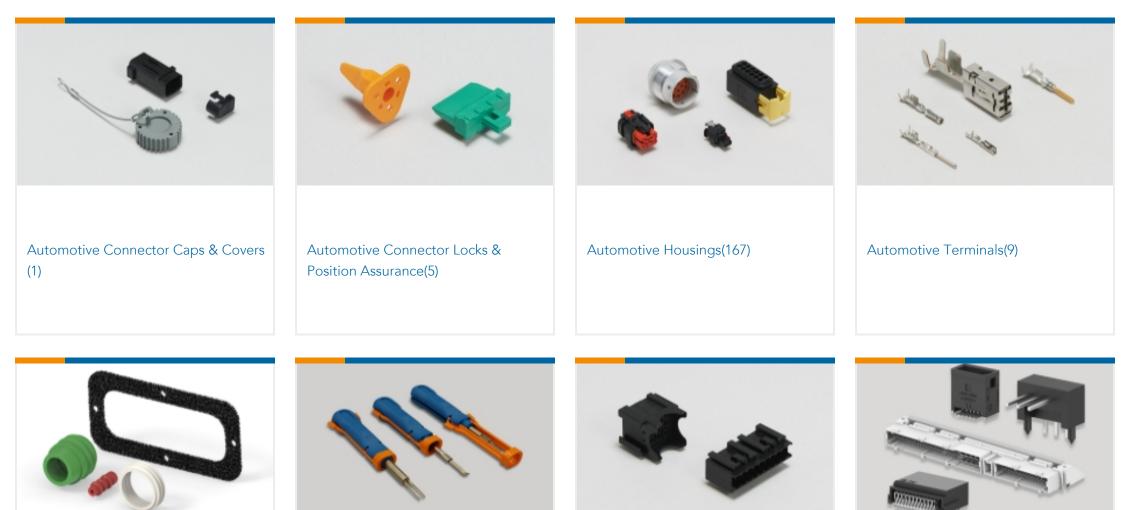


Connector Seals & Cavity Plugs(1)	Insertion & Extraction Tools(6)	Module Components(1)	PCB Headers & Receptacles(1)	

# Also in the Series AMP MCP Connector System

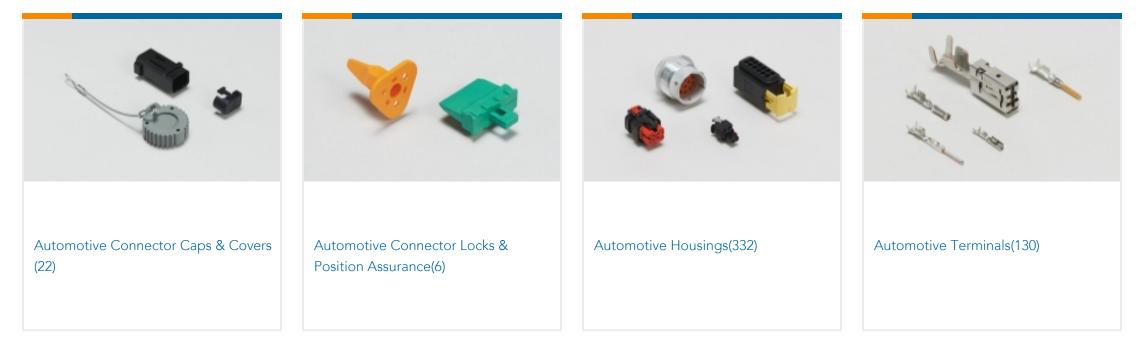


Housing for Female Terminals, Wire-to-Wire, 15 Position, .197 in [5 mm] Centerline, Violet, Signal, Cable Mount (Free-Hanging), Hybrid



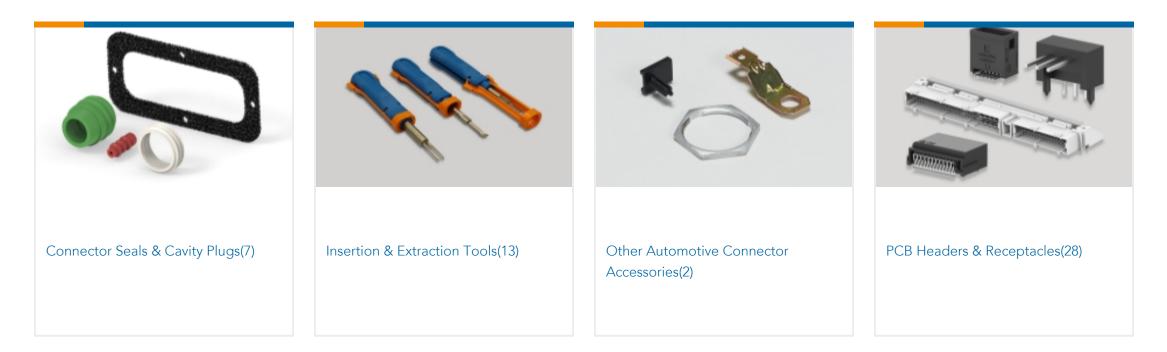


# **Customers Also Bought**

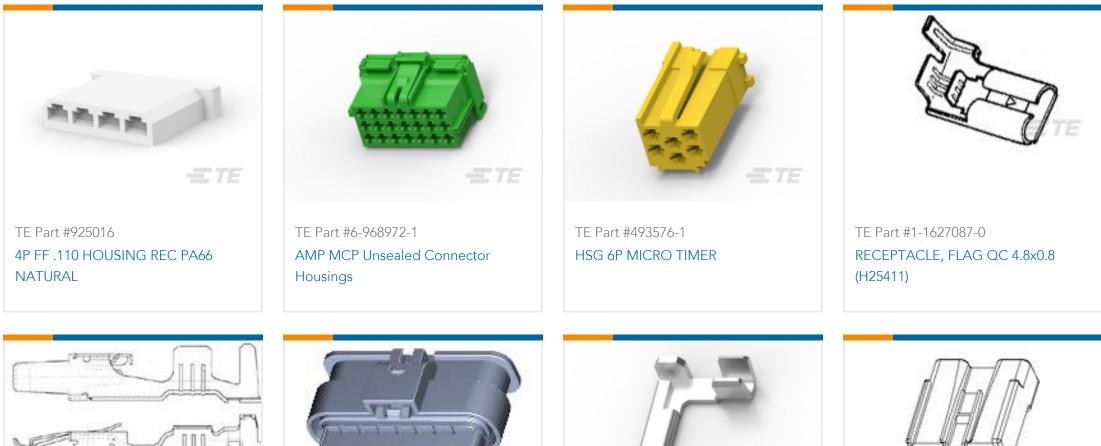



TE Part #1-1670920-1

TE Part #279328-1



TE Part #776074-2

-----

-TE

## Documents

**Product Drawings** AMP MCP 2.8 HSG 15 POS. 2.LOCKING

English

### **CAD** Files

3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_5-968973-1\_F.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_5-968973-1\_F.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_5-968973-1\_F.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use

**&** For support call+1 800 522 6752

Housing for Female Terminals, Wire-to-Wire, 15 Position, .197 in [5 mm] Centerline, Violet, Signal, Cable Mount (Free-Hanging), Hybrid



Product Specifications Application Specification

English