

## 20ACEW\_4 series

20Watt - AC-DC converter

### AC-DC Converter

20 Watt

- ⊕ Ultra-wide 85-305VAC and 100-430VDC input voltage range
- ⊕ Operating ambient temperature range: -40°C to +85°C
- ⊕ Up to 87% efficiency
- ⊕ No-load power consumption 0.1W
- ⊕ 5000m altitude application
- ⊕ Plastic case meets UL94V-0 flammability
- ⊕ EMI performance meets CISPR32/EN55032 CLASS B, EN55014
- ⊕ IEC/EN/UL62368/EN60335/EN61558 safety approved
- ⊕ Over-voltage class III (designed to meet EN61558)



UL-62368-1 (E347551)

20ACEW\_4 series AC-DC converters is one of GAPTEC's new generation compact size power converter. It features ultra-wide AC input and at the same time accepts DC input voltage, low power consumption, low ripple & noise, high efficiency, high reliability, reinforced isolation. It offers good EMC performance compliant to IEC/EN61000-4 and CISPR32/EN55032 and meets IEC/EN/UL62368/EN60335/ EN61558/IEC/EN60601-1/ANSI/AAMI ES60601-1 standards. The converters are widely used in industrial, power, medical treatment, home appliances, instrumentation, communication and civil applications. For extremely harsh EMC environment, we recommend using the application circuit show in Design Reference of this datasheet.

#### Common specifications

Item	Operating condition	Min	Typ	Max	Units
Short circuit protection:		Hiccup, continuous, self-recovery			
Cooling:		Free air convection			
Operating temperature:		-40		+85	°C
Operation temperature range:	Wave-soldering Manual-welding	260 ± 5°C; time: 5 - 10s 360 ± 10°C; time: 3 - 5s			
Storage humidity:			95		%RH
Switching Frequency			65		kHz
Power derating:	-40°C to -25°C 85VAC-165VAC	2.0			%/°C
	+50°C to +70°C: 3/5/9V	2.5			%/°C
	+55°C to +70°C: 12/15/24V	3.33			%/°C
	+70°C to +85°C	1.33			%/°C
	85VAC - 100VAC:	2			%/°VAC
277VAC - 305VAC:	0.71			%/°VAC	
2000m - 5000m:	6.7			%/Km	
Safety standard:		IEC/UL62368-1, EN61558-1, EN60335-1 Safety Approval & EN62368-1 (Report); Design refer to IEC/EN60601-1/ANSI/AAMI ES60601-1			
Safety Certification:		UL/EN/IEC62368/EN60335/EN61558			
Safety Class:		Class II			
MTBF:		MIL-HDBK-217F@25°C > 1500,000 h			
Hot plug:		Unavailable			
Case material:		Black plastic, flame-retardant and heat-resistant (UL94V-0)			
Designed Life: (230VAC)	Ta: 25°C 100% load	>130x10 <sup>3</sup> h			
	Ta: 55°C 100% load	>16x10 <sup>3</sup> h			
	Ta: 55°C 80% load	>27x10 <sup>3</sup> h			
Dimension	DIP package	52.40 x 27.20 x 24.00 mm			
	Chassis mounting	76.00 x 31.50 x 32.30 mm			
	DIN-rail mounting	76.00 x 31.50 x 37.40 mm			
Weight:	DIP	55			g
Weight:	(Chassis mounting)	75			g
Weight:	(DIN rail mounting)	95			g

#### Input specifications

Item	Operating condition	Min	Typ	Max	Units
Input voltage range	• AC Input	85		305	VAC
	• DC Input	100		430	VDC
Input frequency		47		440	Hz
Input current	• 115VAC			0.50	A
	• 230VAC			0.30	A
Inrush current	• 115VAC		20		A
	• 230VAC		45		A
Leakage Current	277VAC/50Hz		0.1mA RMS Max.		
Built In Fuse			3.15A/300V, slow-blow		

#### Isolation specifications

Item	Operating Conditions	Min	Typ	Max	Units
Isolation (Input-Output)	Electric Strength Test for 1min, leakage current <5mA	4000			VAC

#### Example:

##### 20ACEW\_03S4

20 = 20Watt; AC = AC-DC; E = case style ; W = wide input  
03 = 3.3Vout; S = single output; 4 = 4 kVAC isolation

#### Note:

- If the product is not operated within the required load range, the product performance cannot be guaranteed to comply with all parameters in the datasheet;
- Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta = 25°C, humidity <75% with nominal input voltage and rated output load;
- All index testing methods in this datasheet are based on our company corporate standards;
- We can provide product customization service, please contact our technicians directly for specific information;
- Products are related to laws and regulations: see "Features" and "EMC";
- Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

## 20ACEW\_4 series

20Watt - AC-DC converter

Output specifications						
Item	Operating condition	Min	Typ	Max	Units	
Output voltage accuracy			±1.5		%	
Line regulation	Full load		±0.5		%	
Load regulation	0% - 100% load		±1		%	
Ripple & Noise*	20MHz bandwidth (peak-to-peak value)		100	150	mV	
Stand-by Power Consumption	230VAC: 3.3/5/9/12/15V		0.1		W	
	230VAC: 24V		0.12		W	
Temperature Coefficient			±0.02		%/°C	
Over-current Protection			≥110%Io, self-recovery			
Over-voltage Protection	3.3/5VDC output		≤7.5VDC (Output voltage clamp or hiccup)			
	9VDC output		≤15VDC (Output voltage clamp or hiccup)			
	12/15VDC output		≤20VDC (Output voltage clamp or hiccup)			
	24VDC output		≤30VDC (Output voltage clamp or hiccup)			
Min. load		0			%	
Hold-up Time	115VAC input		8		ms	
	230VAC input		50		ms	

Note: \*The "Tip and barrel method" is used for ripple and noise test, output parallel 10uF electrolytic capacitor and 1uF ceramic capacitor, please refer to AC-DC Converter Application Notes for specific information.




## Product Selection Guide

Approval	Model	Power [W]	Output [Vo]	Output [Io]	Efficiency [%, typ]	Capacitive load [μF, max]
UL	20ACEW_03S4	14.85	3.3V	4500mA	81	8000
UL	20ACEW_05S4	20	5V	4000mA	85	8000
UL	20ACEW_09S4	20	9V	2200mA	85	5400
UL	20ACEW_12S4	20	12V	1670mA	86	4000
UL	20ACEW_15S4	20	15V	1330mA	87	3000
UL	20ACEW_24S4	20	24V	830mA	87	1000

Note: \* Use suffix "/CM" for chassis and suffix "/DR" for DIN-Rail mounting.

EMC specifications						
Emissions	CE	CISPR32/EN55032 CLASS B CISPR11/EN55011 CLASS B EN55014-1				
Emissions	RE	CISPR32/EN55032 CLASS B CISPR11/EN55011 CLASS B EN55014-1				
Emissions	Flicker	IEC/EN6100-3-3 EN55014-1				
Immunity	ESD	IEC/EN 61000-4-2 IEC/EN55014-2	Contact ±6KV/Air ±8KV		perf. Criteria B perf. Criteria B	
Immunity	RS	IEC/EN 61000-4-3 IEC/EN55014-2	10V/m		perf. Criteria A perf. Criteria A	
Immunity	EFT	IEC/EN61000-4-4 ±2KV IEC/EN61000-4-4 ±4KV (See Fig.2 for recommended circuit) EN55014-2			perf. Criteria B perf. Criteria B perf. Criteria B	
Immunity	Surge	IEC/EN61000-4-5 line to line ±1KV IEC/EN61000-4-5 line to line ±2KV (See Fig.2 for recommended circuit) EN55014-2			perf. Criteria B perf. Criteria B perf. Criteria B	
Immunity	PFMF	IEC/EN6100-4-8 IEC/EN55014-2	10A/m		perf. Criteria A perf. Criteria A	
Immunity	CS	IEC/EN 61000-4-6 EN55014-2	10 Vr.m.s		perf. Criteria A perf. Criteria A	



## Product Characteristic Curve



Note:

- ① With an AC input between 85-100V/277-305VAC and a DC input between 100-120V/390-430VDC, the output power must be derated as per temperature derating curves;
- ② This product is suitable for applications using natural air cooling; for applications in closed environment please consult our FAE's.

## Efficiency

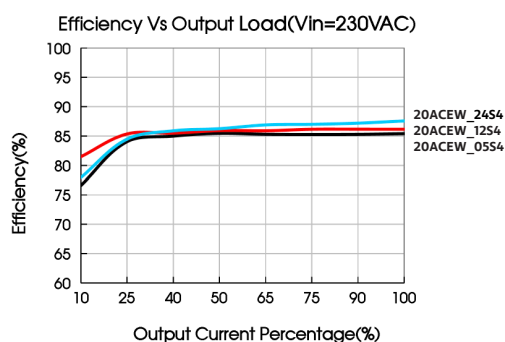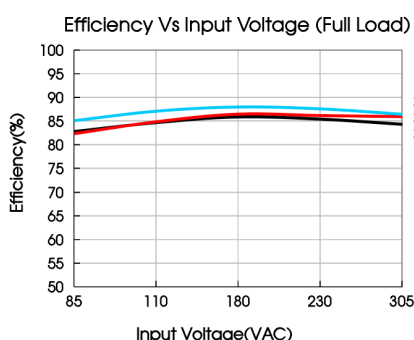

## Typical application

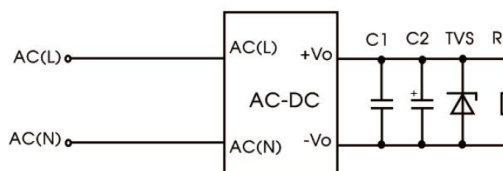



Fig. 1: Typical circuit diagram

Part No.	C1 (µF)	C2 (µF)	TVS
20ACEW_03S4	1µF/50V	10µF/16V	SMBJ7.0A
20ACEW_05S4		10µF/16V	SMBJ7.0A
20ACEW_09S4		10µF/25V	SMBJ12A
20ACEW_12S4		10µF/25V	SMBJ20A
20ACEW_15S4		10µF/25V	SMBJ20A
20ACEW_24S4		10µF/35V	SMBJ30A

Output Filter Components:

- ① C1 is a ceramic capacitor used for filtering high-frequency noise and TVS is a recommended suppressor diode to protect the application in case of a converter failure;
- ② This circuit is recommended for indoor use.



## EMC compliance recommended circuit

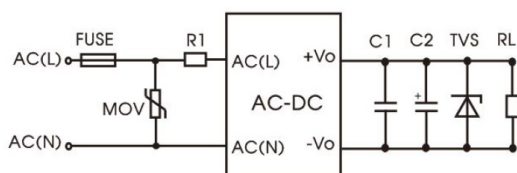

Component	Recommended value
MOV	S14K350
R1	3Ω/5W (wire wound resistor)
FUSE	3.15A/300V, slow-blow, required

## Dimensions and Recommended Layout - DIP Package

THIRD ANGLE PROJECTION

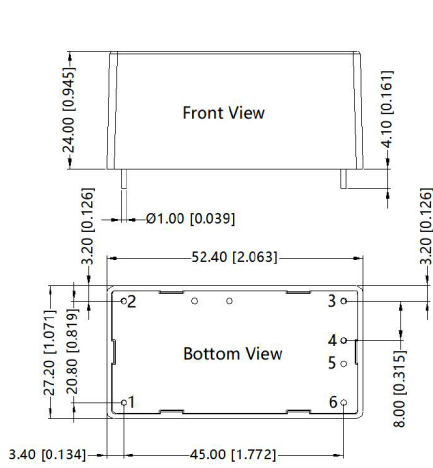


Note: Grid 2.54\*2.54mm

Pin-Out	
Pin	Function
1	AC(L)
2	AC(N)
3	-Vo
4	+Vo
5	No Pin
6	No Pin

Note:  
Unit: mm[inch]  
Pin diameter tolerances:  $\pm 0.10$  [ $\pm 0.004$ ]  
General tolerances:  $\pm 0.50$  [ $\pm 0.020$ ]

## Chassis mounting

THIRD ANGLE PROJECTION

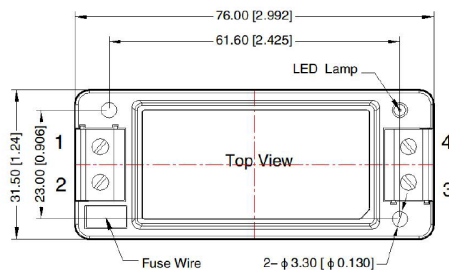



Pin-Out	
Pin	Function
1	AC(N)
2	AC(L)
3	-Vo
4	+Vo

Note:  
Unit: mm[inch]  
Wire range: 24-12 AWG  
Tightening torque: Max 0.4 N-m  
General tolerances:  $\pm 1.00$  [ $\pm 0.039$ ]

## 20ACEW\_4 series

20Watt - AC-DC converter

### DIN rail mounting

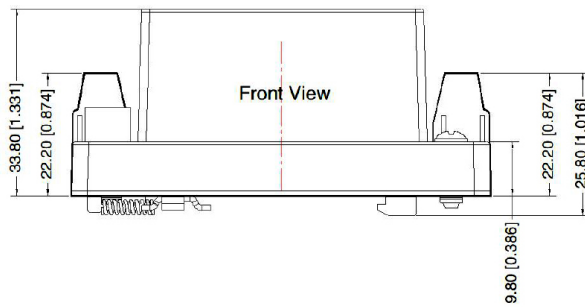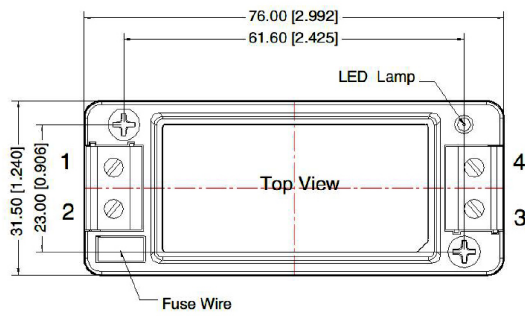

THIRD ANGLE PROJECTION 

Pin-Out	
Pin	Function
1	AC(N)
2	AC(L)
3	-Vo
4	+Vo

Note:  
Unit: mm[inch]  
Wire range: 24-12 AWG  
Tightening torque: Max 0.4 N-m  
Mounting rail: TS35, rail needs to connect safety ground  
General tolerances:  $\pm 1.00[\pm 0.039]$