# KUP-17D55-12 - ACTIVE

### Potter & Brumfield | Potter & Brumfield KUP

TE Internal #: 5-1393118-2 Power Relays, Industrial Panel Plug-In, Monostable, DC, 1800 mW Coil Power Rating DC, 80 Ω Coil Resistance, Potter & Brumfield KUP View on TE.com >



Relays & Contactors > Relays > Power Relays



Power Relay Type: Industrial Panel Plug-In

Coil Magnetic System: Monostable, DC

Coil Power Rating DC: 1800 mW

Coil Resistance: 80  $\Omega$ 

Coil Special Features: UL Coil Insulation Class B

## Features

## Product Type Features

Power Relay Type

## Industrial Panel Plug-In

## **Electrical Characteristics**

Insulation Initial Dielectric Between Coil & Contact Class

Insulation Initial Dielectric Between Contacts & Coil

1500 - 2500 V

2200 Vrms

Actuating System	DC
Insulation Initial Dielectric Between Open Contacts	1200 Vrms
Contact Limiting Making Current	10 A
Contact Limiting Short-Time Current	10 A
Contact Limiting Continuous Current	10 A
Coil Power Rating Class	1500 mW
Insulation Initial Dielectric Between Adjacent Contacts	2200 Vrms
Insulation Initial Resistance	100 MΩ
Contact Limiting Breaking Current	10 A
Coil Magnetic System	Monostable, DC
Coil Power Rating DC	1800 mW
Coil Resistance	2 08
Coil Special Features	UL Coil Insulation Class B
Coil Voltage Rating	12 VDC
Contact Switching Load (Min)	300mA @ 12V

**&** For support call+1 800 522 6752

Power Relays, Industrial Panel Plug-In, Monostable, DC, 1800 mW Coil Power Rating DC, 80  $\Omega$  Coil Resistance, Potter & Brumfield KUP



Contact Voltage Rating	240 VAC
Body Features	
Product Weight	85 g[2.988 oz]
Contact Features	
Contact Arrangement	4 Form C (CO)
Contact Current Class	16 A
Contact Current Rating (Max)	10 A
Contact Material	AgCdO
Contact Number of Poles	4
Relay Terminal Type	Quick Connect, Solder
Mechanical Attachment	
Relay Mounting Type	Bracket, Panel Mount
Dimensions	
Length Class (Mechanical)	40 – 50 mm
Height Class (Mechanical)	30 – 40 mm
Width Class (Mechanical)	30 – 40 mm
Product Width	38.9 mm[1.531 in]
Product Length	48.4 mm[1.906 in]
Product Height	35.7 mm[1.405 in]
Usage Conditions	
Environmental Ambient Temperature Class	0-50 °C
Environmental Ambient Temperature (Max)	50 °C[122 °F]
Operating Temperature Range	-45 – 50 °C
Packaging Features	
Packaging Method	Package
<b>Product Compliance</b> For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold

Power Relays, Industrial Panel Plug-In, Monostable, DC, 1800 mW Coil Power Rating DC, 80  $\Omega$  Coil Resistance, Potter & Brumfield KUP



Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2021 (211) SVHC > Threshold: Cadmium oxide (7.95% in Component Part) Cadmium oxide (12.06% in Component Part) Article Safe Usage Statements: Use personal protective equipment as required. Do not eat, drink or smoke when using this product. Recycle if possible and dispose of the article by following all

applicable governmental regulations relevant to your geographic location.

Not Yet Reviewed for halogen content

Not applicable for solder process capability

Product Compliance Disclaimer

Halogen Content

Solder Process Capability

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

## Compatible Parts



# Also in the Series | Potter & Brumfield KUP




# Customers Also Bought

**C** For support call+1 800 522 6752

Power Relays, Industrial Panel Plug-In, Monostable, DC, 1800 mW Coil Power Rating DC, 80  $\Omega$  Coil Resistance, Potter & Brumfield KUP



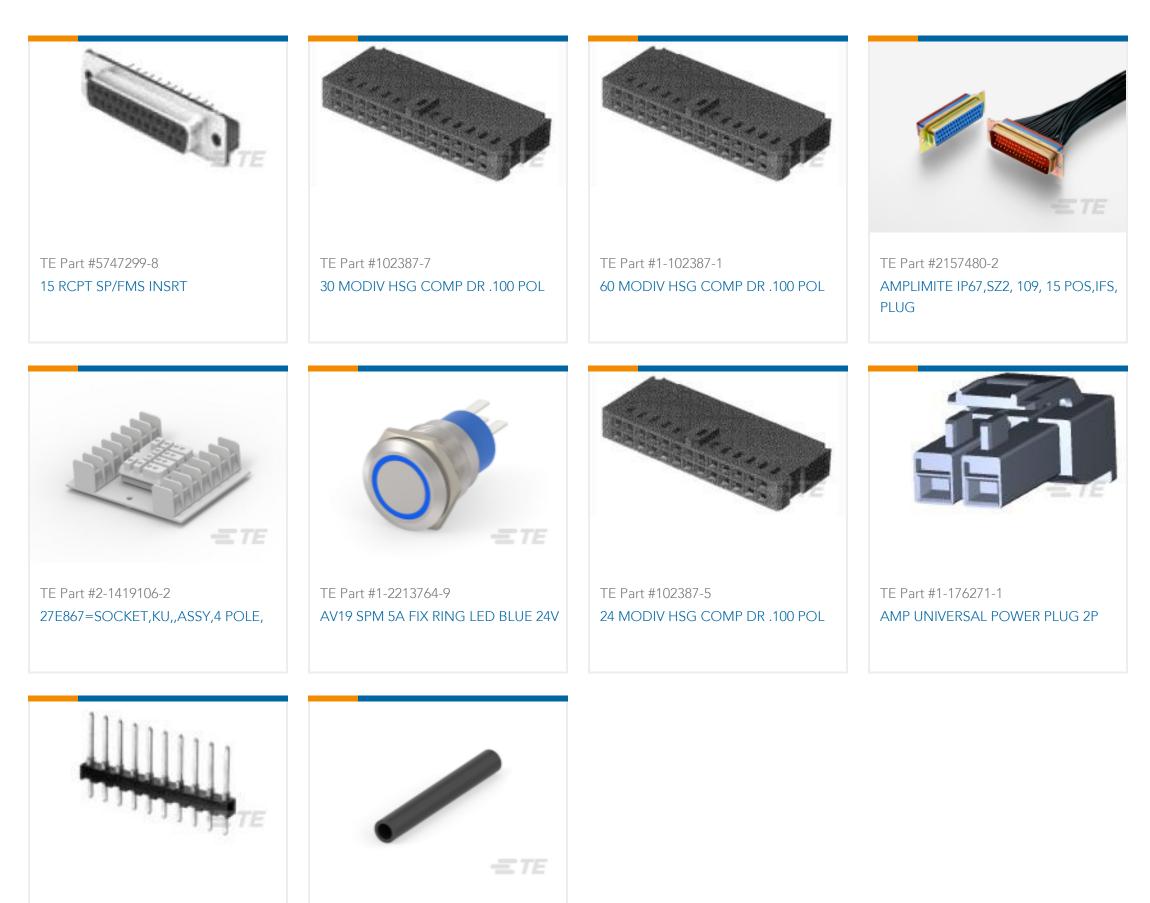

TE Part #2-825440-0 MOD 2 PINHDR 2X20P.



## Documents

**CAD** Files

3D PDF

3D

Customer View Model ENG\_CVM\_CVM\_5-1393118-2\_D.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_5-1393118-2\_D.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_5-1393118-2\_D.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages KUP Series Panel Plug-in Relay

English

**Product Specifications** 

**C** For support call+1 800 522 6752

Power Relays, Industrial Panel Plug-In, Monostable, DC, 1800 mW Coil Power Rating DC, 80  $\Omega$  Coil Resistance, Potter & Brumfield KUP



## Definitions General Purpose Relays

English

Agency Approvals

UL

English