

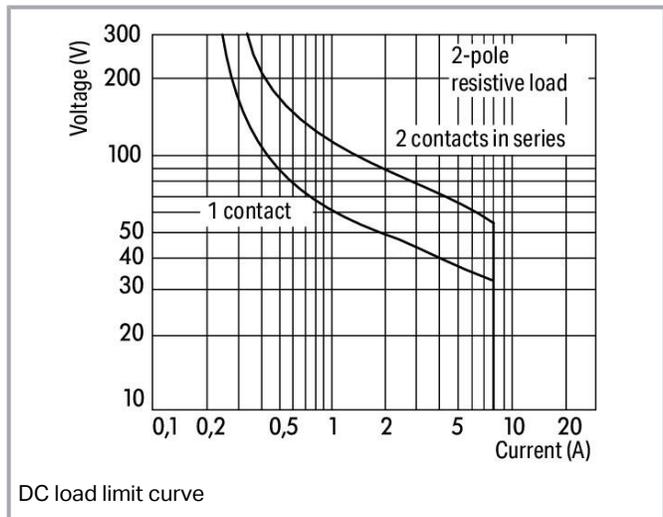


**Data sheet | Item number: 788-176**

Basic relay; Nominal input voltage: 115 VAC; 2 changeover contacts;  
Limiting continuous current: 8 A; Module width: 13 mm; Module height: 15 mm

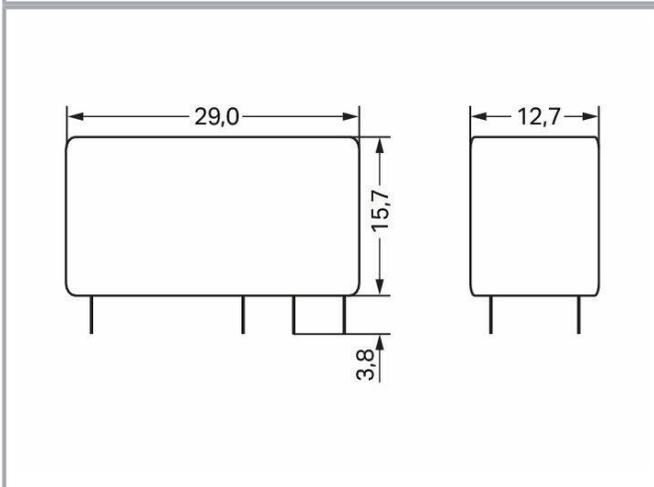

[www.wago.com/788-176](http://www.wago.com/788-176)

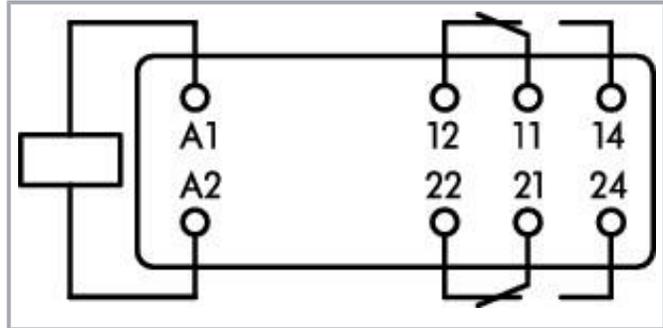

**Data**  
**Technical data**

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



### Control circuit

Nominal input voltage $U_N$	AC 115 V
Nominal input current at $U_N$	15 mA

### Load circuit

Number of changeover/switchover contacts	2
Contact material (relay)	AgNi 90/10
Limiting continuous current	8 A
Inrush current (resistive) max.	(AC) 15 A / 4 s
Switching voltage (max.)	AC 250 V
Switching power (resistive) max.	AC 2000 VA; DC (see load limit curve)
Switching capacity	AC-15: 3 A / AC 250 V; DC-13: 2 A / DC 24 V
Recommended minimum load	12 V / 10 mA
Pull-in time (typ.)	8 ms
Drop-out time (typ.)	6 ms
Bounce time (typ.)	10 ms
Electrical life (NO; resistive load; 23 °C)	$10 \times 10^3$ switching operations
Mechanical life	$30 \times 10^6$ switching operations
Switching frequency with/without load (max.)	$6 \text{ min}^{-1}$ / $1200 \text{ min}^{-1}$

### Safety and protection

Dielectric strength (control/load circuit) (AC, 1 min)	5 kVrms
Dielectric strength (open contact) (AC, 1 min)	1 kVrms
Dielectric strength (load/load circuit) (AC, 1 min)	2.5 kVrms
Protection type	IP40

### Physical data

Width	12.7 mm / 0.5 inches
Height from the surface	15.7 mm / 0.618 inches
Depth	29 mm / 1.142 inches

### Mechanical data

Mounting type	Pluggable module
---------------	------------------

Subject to changes. Please also observe the further product documentation!



## Material data

Fire load	0.185 MJ
Weight	12.3 g

## Environmental requirements

Ambient temperature (operation at $U_N$ )	-40 ... +70 °C
Ambient temperature (storage)	-40 ... +85 °C

## Standards and specifications

Standards/specifications	EN 61810-1
--------------------------	------------

## Commercial data

Product Group	6 (INTERFACE ELECTRONIC)
eCl@ss 10.0	27-37-16-01
eCl@ss 9.0	27-37-16-01
ETIM 8.0	EC001437
ETIM 7.0	EC001437
Recupel Type	
ECCN	NO DATA
PU (SPU)	20 pcs
Packaging type	box
Country of origin	AT
GTIN	4050821867883
Customs tariff number	85364900990

## Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
SCIP notification number (Austria)	d8c50790-66a1-4a29-9a66-bd3b19513141
SCIP notification number (Belgium)	2cb8475a-573c-4f9f-93fa-8ff07e949747
SCIP notification number (Bulgaria)	d60ba03a-96a1-49d3-8fbf-28d971a9e825
SCIP notification number (Czech Republic)	78c223a4-7cbb-42aa-8609-0d1bea2fa79b
SCIP notification number (Denmark)	54864db0-f26f-42aa-ba9f-8c8d88a93eda
SCIP notification number (Finland)	0e2f7cc1-5a96-401b-8600-2ec6387f98b0
SCIP notification number (France)	99a1978c-985e-4b87-94c5-5dc4534d88f8
SCIP notification number (Germany)	972beb0e-cea4-47db-9c6c-5ba64d880812

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
 Hansastr. 27  
 32423 Minden  
 Phone: +49571 887-0 | Fax: +49571 887-169  
 Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
 We are always happy to take your call at +49 (571) 887-44222.



SCIP notification number (Hungary)	8acaee4c-ccbd-4bd4-85ab-25036884f3ac
SCIP notification number (Italy)	7504a942-da05-4b66-b0de-202f757859ae
SCIP notification number (Netherlands)	ed6870d8-78cf-4ba2-bb50-6dc6fd7bd6ed
SCIP notification number (Poland)	520e7188-aaf0-4ce7-ba50-838aab6e2a43
SCIP notification number (Romania)	ea5e1c00-3414-4dac-8ef9-8b6046b23d1a
SCIP notification number (Sweden)	bd3304c9-670d-4162-a500-68cc30c32da3

## Optional accessories

### Sockets

Socket without relay
----------------------



**Item no.: 788-102**

Relay socket; 2 changeover contacts; for 15 mm basic relays; gray

[www.wago.com/788-102](http://www.wago.com/788-102)

## Downloads

### Documentation

#### Bid Text

788-176 docx - Datei	2019 Feb 20	docx 15.9 kB	Download
788-176 X81 - Datei	2019 Feb 19	xml 3.7 kB	Download

#### Additional Information

Disposal and Recycling	V 1.1.0	pdf	Download
Electrical and electronic equipment, Batteries, Packaging	2022 Aug 18	2.2 MB	

## CAD/CAE-Data

### CAE data

WSCAD Universe 788-176	URL	Download
------------------------	-----	----------

### CAD data

2D/3D Models 788-176	URL	Download
----------------------	-----	----------

### Asset Administration Shell

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
 Hansastr. 27  
 32423 Minden  
 Phone: +49571 887-0 | Fax: +49571 887-169  
 Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
 We are always happy to take your call at +49 (571) 887-44222.



Asset Administration Shell 788-176

[URL](#)

[Download](#)

---

## Environmental Product Compliance

### Compliance Search

Environmental Product Compliance 788-176

[URL](#)

[Download](#)

Basic relay; Nominal input voltage: 115 VAC; 2 changeover contacts; Limiting continuous current: 8 A; Module width: 13 mm; Module height: 15 mm

---

## Installation Notes

Subject to changes. Please also observe the further product documentation!

---

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.