

Click to
ORDER
samples

AM3PW-Z



The AM3PW-Z is a DC/DC converter that offers greater cost effectiveness due to material normalization and production automation also leading to improved reliability and performance. Offering an ultra-wide 4:1 input voltage range of 4.5 to 75VDC and an output voltage range from 3.3 to 15V & ± 5 to ± 15 , this series will offer many benefits to your new system design.


This new series offers great operating temperatures, from -40°C to 80°C with full power up to 80°C. It also features an isolation of 1600VDC for improved reliability and system safety. Furthermore, a high MTBF of 820,000h, output short circuit protection (OSCP), under voltage lock-out come standard with the series. The AM3PW-Z is suitable for gate driving, current sensing, IoT, instrumentation, industrial controls, communication and civil applications.

Features


- 4:1 Wide Input Range: 4.5VDC – 75VDC
- Operating Temp: -40 °C to +80 °C
- Low ripple & noise, up to 100mV(p-p) max
- Efficiency up to 84%
- Remote ON/OFF control
- Output short circuit protection, Under voltage lock-out protection
- Package: 8 Pin DIP package
- Regulated Output




Summary

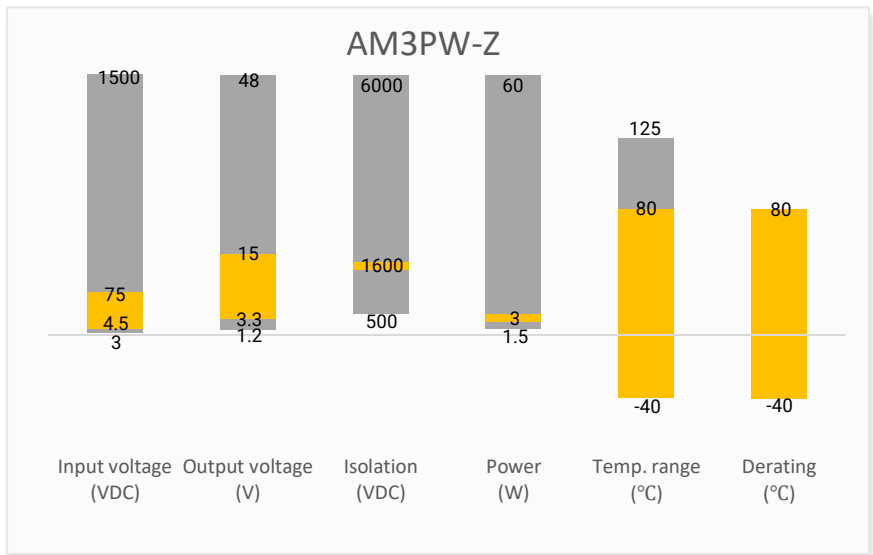

Training

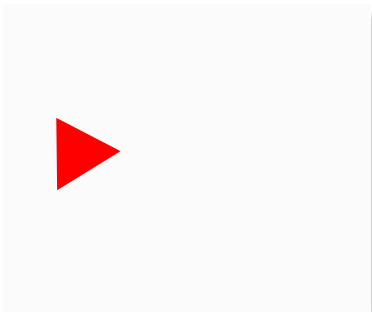

Product Training Video
(click to open)



Application Notes

Applications



Power Grid



Industrial



Telecom



Instrumentation

Models & Specifications

| Single Output | | | | | | | |
|---------------|---------------------|----------------------|------------------------|-----------|-------------------------|------------------------------|--------------------------|
| Model | Input Voltage (VDC) | Output Voltage (VDC) | Input Current Max (mA) | | Output Current Max (mA) | Maximum Capacitive Load (μF) | Efficiency (%) Full Load |
| | | | No Load | Full Load | | | |
| AM3PW-1203SZ | 12 (4.5 ~ 18) | 3.3 | 30 | 257 | 700 | 3300 | 75 |
| AM3PW-1205SZ | 12 (4.5 ~ 18) | 5 | 45 | 309 | 600 | 1680 | 81 |
| AM3PW-1212SZ | 12 (4.5 ~ 18) | 12 | 55 | 301 | 250 | 470 | 83 |
| AM3PW-1215SZ | 12 (4.5 ~ 18) | 15 | 60 | 301 | 200 | 330 | 83 |
| AM3PW-2403SZ | 24 (9 ~ 36) | 3.3 | 25 | 127 | 700 | 3300 | 76 |
| AM3PW-2405SZ | 24 (9 ~ 36) | 5 | 20 | 152 | 600 | 1680 | 82 |
| AM3PW-2412SZ | 24 (9 ~ 36) | 12 | 30 | 149 | 250 | 470 | 84 |
| AM3PW-2415SZ | 24 (9 ~ 36) | 15 | 35 | 149 | 200 | 330 | 84 |
| AM3PW-4803SZ | 48 (18 ~ 75) | 3.3 | 10 | 65 | 700 | 3300 | 74 |
| AM3PW-4805SZ | 48 (18 ~ 75) | 5 | 10 | 77 | 600 | 1680 | 81 |
| AM3PW-4812SZ | 48 (18 ~ 75) | 12 | 15 | 77 | 250 | 470 | 81 |
| AM3PW-4815SZ | 48 (18 ~ 75) | 15 | 15 | 76 | 200 | 330 | 82 |

| Dual Output | | | | | | | |
|--------------|---------------------|----------------------|------------------------|-----------|-------------------------|------------------------------|--------------------------|
| Model | Input Voltage (VDC) | Output Voltage (VDC) | Input Current Max (mA) | | Output Current Max (mA) | Maximum Capacitive Load (μF) | Efficiency (%) Full Load |
| | | | No Load | Full Load | | | |
| AM3PW-1205DZ | 12 (4.5 ~ 18) | ± 5 | 30 | 313 | ± 300 | ± 1000 | 80 |
| AM3PW-1212DZ | 12 (4.5 ~ 18) | ± 12 | 55 | 305 | ± 125 | ± 220 | 82 |
| AM3PW-1215DZ | 12 (4.5 ~ 18) | ± 15 | 60 | 301 | ± 100 | ± 220 | 83 |
| AM3PW-2405DZ | 24 (9 ~ 36) | ± 5 | 25 | 154 | ± 300 | ± 1000 | 81 |
| AM3PW-2412DZ | 24 (9 ~ 36) | ± 12 | 30 | 151 | ± 125 | ± 220 | 83 |
| AM3PW-2415DZ | 24 (9 ~ 36) | ± 15 | 35 | 149 | ± 100 | ± 220 | 84 |
| AM3PW-4805DZ | 48 (18 ~ 75) | ± 5 | 20 | 79 | ± 300 | ± 1000 | 79 |
| AM3PW-4812DZ | 48 (18 ~ 75) | ± 12 | 20 | 78 | ± 125 | ± 220 | 80 |
| AM3PW-4815DZ | 48 (18 ~ 75) | ± 15 | 25 | 78 | ± 100 | ± 220 | 80 |

| Input Specification | | | | |
|--------------------------|--------------------------------|---------|---------|----------|
| Parameters | Conditions | Typical | Maximum | Units |
| Voltage range | See models table | | | VDC |
| Filter | Capacitor | | | |
| Absolute maximum rating | 12V input models, 0.1 sec. max | | 25 | VDC |
| | 24V input models, 0.1 sec. max | | 50 | VDC |
| | 48V input models, 0.1 sec. max | | 100 | VDC |
| Reflected ripple current | Nominal input voltage | 20 | | mA pk-pk |
| Start-up time | Nominal input voltage | 30 | | ms |
| | 12V input models | 3.5 | | VDC |

| | | | | |
|--------------------------|------------------------|-------------------------------|-----|-----|
| Under voltage protection | 24V input models | 7.0 | | |
| | 48V input models | 15.5 | | VDC |
| Ctrl * | Module ON | Open or high impedance | | |
| | Module OFF | 2~4 mA input current (via 1K) | | |
| | Input current when OFF | | 2.5 | mA |

| Isolation Specification | | | | |
|-------------------------|------------|---------|---------|-------|
| Parameters | Conditions | Typical | Maximum | Units |
| Tested I/O voltage | 60 sec | 1600 | | VDC |
| Resistance | | ≥1000 | | MΩ |
| Capacitance | | 2000 | | pF |

| Output Specification | | | | |
|--------------------------------|--|------------------------------|---------|----------|
| Parameters | Conditions | Typical | Maximum | Units |
| Voltage accuracy | 0 ~ 100% load | ± 1 | | % |
| Line regulation | Full load | | ± 0.2 | % |
| Load regulation | 0 ~ 100% load | | ± 1 | % |
| Cross regulation (Dual output) | One load is 25% to 100%, the other load is 100% load | ± 5 | | % |
| Short circuit protection | Continuous, Auto recovery | | | |
| Temperature coefficient | Full load | ± 0.02 | | %/°C |
| Ripple & Noise* | Single output models | | 150 | mV pk-pk |
| | Dual output models | | 100 | mV pk-pk |
| Transient recovery time | 25% load step change | 500 | | μS |
| Transient response deviation | 25% load step change | Single 3.3V/5V output models | ± 5 | % |
| | | Others | ± 3 | % |


* Ripple and Noise are measured at 20MHz bandwidth by using a 0.1μF (M/C) and 10μF (E/C) parallel capacitor and typical input with full load

| General Specifications | | | | |
|------------------------|---|---|---------|-------|
| Parameters | Conditions | Typical | Maximum | Units |
| Switching frequency | | 100 | | KHz |
| Operating temperature | See derating graph | -40 to +80 | | °C |
| Storage temperature | | -55 to +125 | | °C |
| Soldering temperature | 1.5mm from case, 10 sec max | | 260 | °C |
| Case temperature | | | 100 | °C |
| Cooling | Free air convection (30 ~ 65 LFM) | | | |
| Humidity | Non-condensing | | 95 | % RH |
| Case material | Heat resistant black Plastic (flammability to UL 94V-0) | | | |
| Pin material | C5191R-H solder-coated | | | |
| Weight | | 3.6 | | g |
| Dimensions (L x W x H) | | 0.55 x 0.55 x 0.32 inches, 14.00 x 14.00 x 8.10mm | | |
| MTBF | > 820 000 hrs (MIL-HDBK -217F, t=+25°C) / Full Load | | | |


| Safety Specifications | | |
|-----------------------|--|---|
| Parameters | | |
| Standards | Designed to meet IEC/UL/EN 62368-1,60950-1 | |
| | EMC - Conducted and radiated emission | EN55032, CLASS A with EMI recommended circuit |
| | Electrostatic Discharge Immunity | IEC 61000-4-2, Contact $\pm 6\text{kV}$, Air $\pm 8\text{kV}$, Criteria A |
| | RF, Electromagnetic Field Immunity | IEC 61000-4-3, 10V/m , Criteria A |
| | Electrical Fast Transient/Burst Immunity | IEC 61000-4-4, $\pm 2\text{kV}$, Criteria A with EFT recommended circuit |
| | Surge Immunity | IEC 61000-4-5, L-L $\pm 2\text{kV}$, Criteria A with Surge recommended circuit |
| | RF, Conducted Disturbance Immunity | IEC 61000-4-6, 10Vr.m.s. , Criteria A |
| | PFMF | IEC 61000-4-8, $50\text{Hz } 100\text{A/m}$, Criteria A |

Derating


Free air Convection

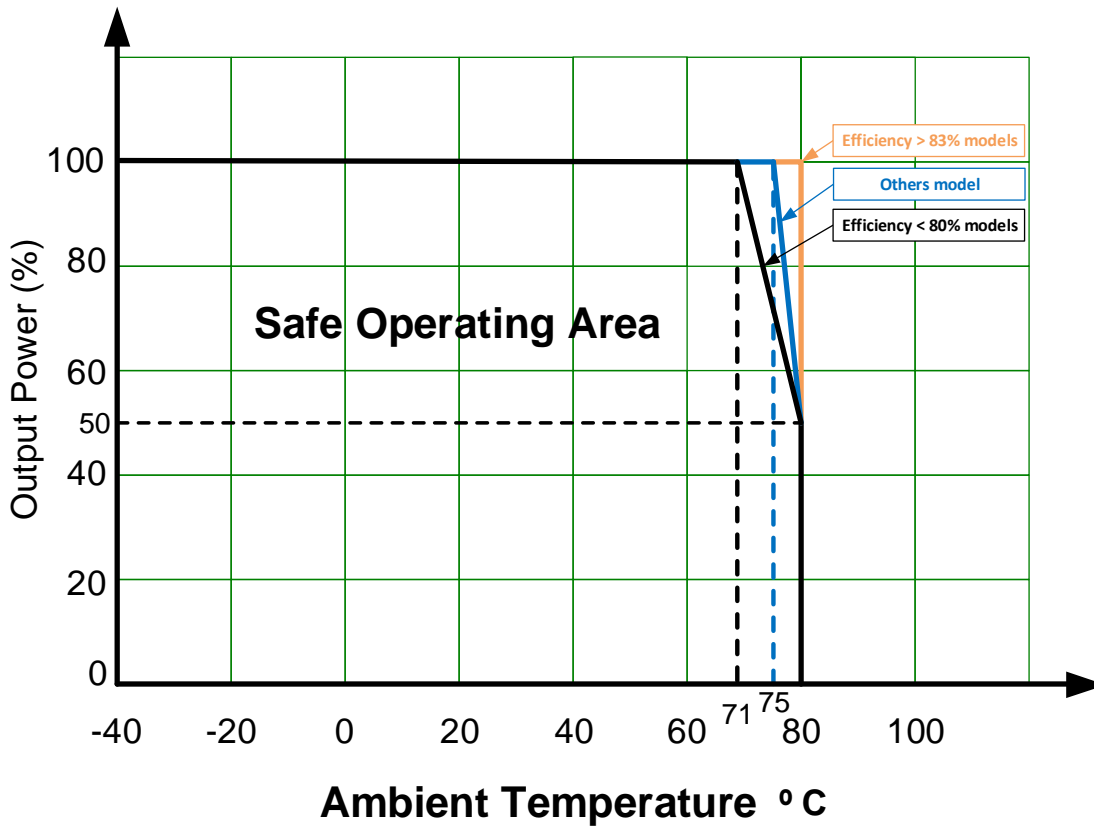

EFT / Surge Recommended Circuit

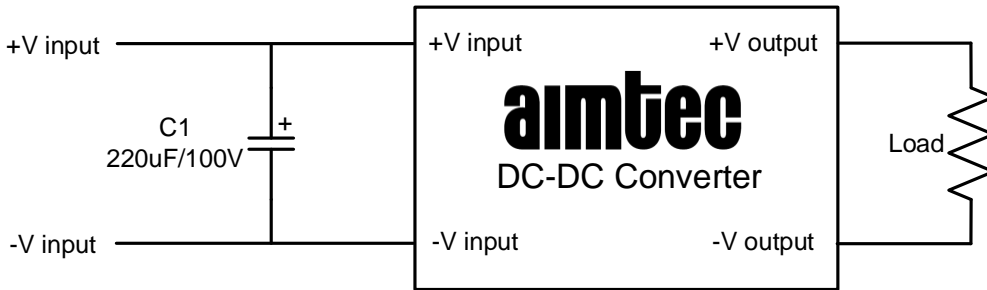


EMI Recommended Circuit

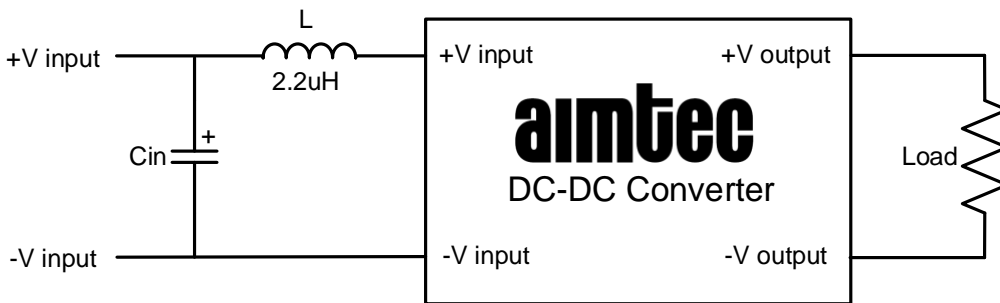


| Vin | Cin |
|-----|-----------------|
| 12V | 1210/10uF/35V |
| 24V | 1210/2.2uF/100V |
| 48V | 1210/4.7uF/100V |

Remote ON/OFF test Circuit

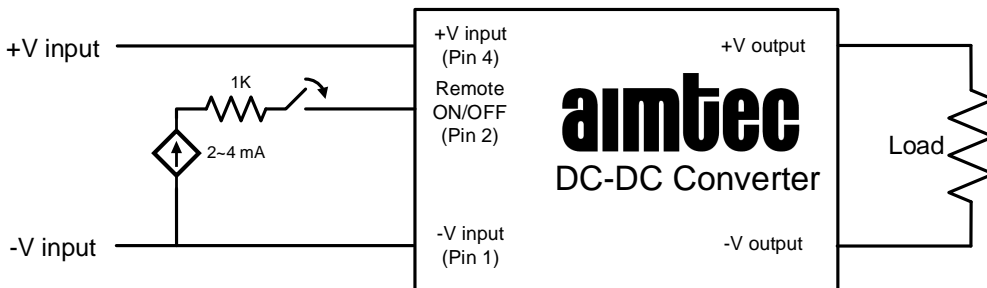

**Note: Input current(2~4mA) via 1KΩ to Pin2, converter OFF.
Open or high impedance, converter ON.**

Dimensions

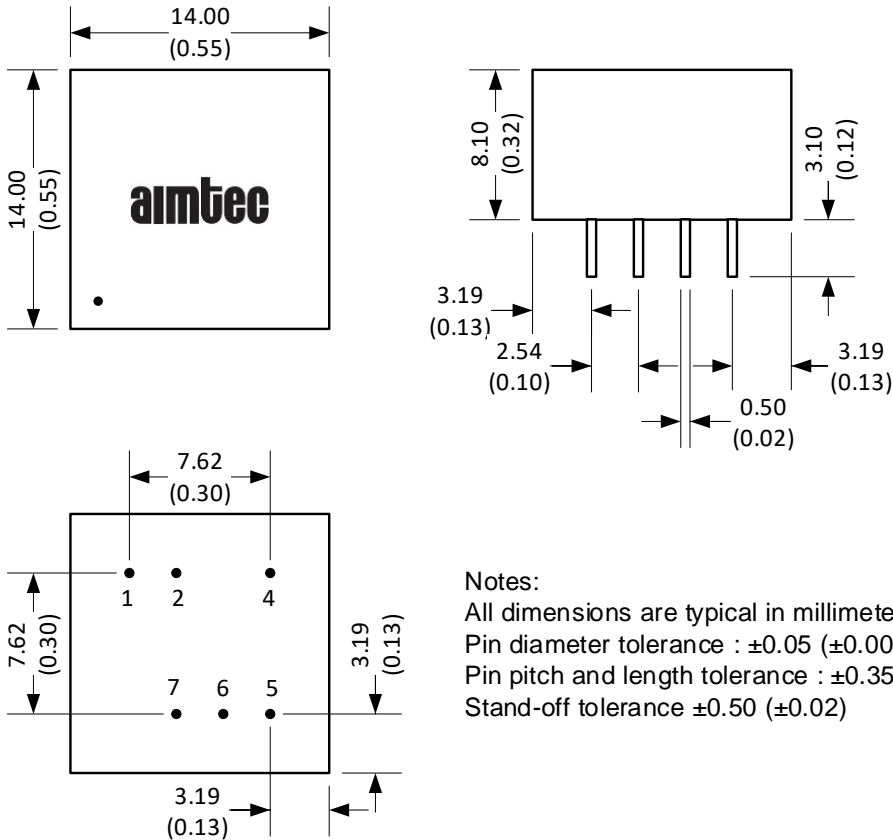

Notes:

- All dimensions are typical in millimeters (inches).
- Pin diameter tolerance : ± 0.05 (± 0.002)
- Pin pitch and length tolerance : ± 0.35 (± 0.014)
- Stand-off tolerance ± 0.50 (± 0.02)

| Pin Out Specifications | | |
|------------------------|---------------|---------------|
| Pin | Single | Dual |
| 1 | -V Input | -V Input |
| 2 | Remote ON/OFF | Remote ON/OFF |
| 4 | +V Input | +V Input |
| 5 | +V Output | +V Output |
| 6 | NC | Common |
| 7 | -V Output | -V Output |

NOTE: 1. Datasheets are updated as needed and as such, specifications are subject to change without notice. Once printed or downloaded, datasheets are no longer controlled by Aimtec; refer to www.aimtec.com for the most current product specifications. **2.** Product labels shown, including safety agency certifications on labels, may vary based on the date manufactured. **3.** Mechanical drawings and specifications are for reference only. **4.** All specifications are measured at an ambient temperature of 25°C, humidity < 75%, nominal input voltage and at rated output load unless otherwise specified. **5.** Aimtec may not have conducted destructive testing or chemical analysis on all internal components and chemicals at the time of publishing this document. CAS numbers and other limited information are considered proprietary and may not be available for release. **6.** This product is not designed for use in critical life support systems, equipment used in hazardous environments, nuclear control systems or other such applications which necessitate specific safety and regulatory standards other than the ones listed in this datasheet. **7.** Warranty is in accordance with Aimtec's standard Terms of Sale available at www.aimtec.com.